
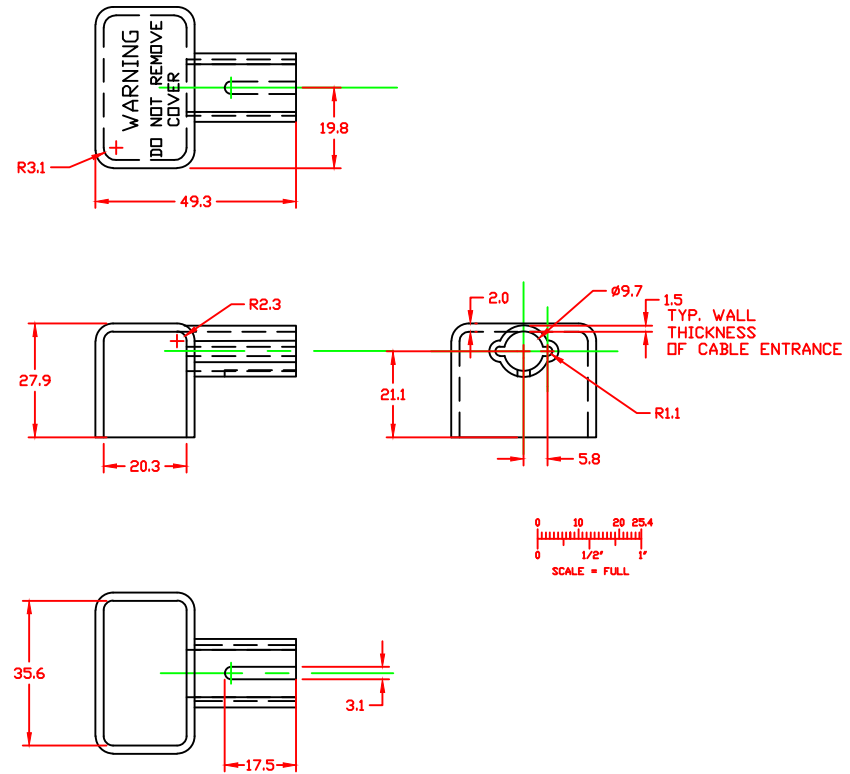


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED.

LTR.	REVISIONS	DATE
A	REDRAWN FROM SOL-LEAD, 12-1984	3-31-2003
B	4.5 WAS 5.2, 3.0 WAS 3.4, .3 WAS .4	30MAY03

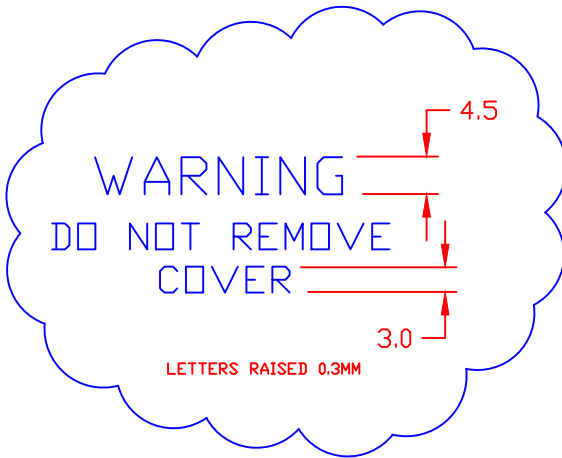


TOLERANCE UNLESS OTHERWISE SPECIFIED:  $\pm 0.30^*/\pm 0.8\text{mm}$   
 RADIAL DIAMETERS TO BE MEASURED OVER MANDRELS,  
 RING GAGES OR PIN GAGES OF SUITABLE SIZE

MATERIAL:

RED PVC  
 (U.L. 94 Rated Material  
 Available Upon Request)

HARDNESS 10 SEC.:  
 TENSILE STRENGTH, Psi:  
 ELONGATION, %:  
 TEAR STRENGTH, Ppi:  
 OXYGEN INDEX, %:

65 SHORE "A"  
 1100  
 410  
 180  
 21.2

		<b>VTE Incorporated</b> 5437 Robinson Road, P.O. Box 790 Pellston, Michigan 49769 Telephone: 1-800-527-9256, 231-539-8000 FAX: 231-539-0914	
		REF: *****	DATE: 3-31-03
TITLE: BATTERY TERMINAL INSULATOR			SCALE:
MATERIAL:		PART NO.	
COLOR:	DRG CLASS	445N9G02	