

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED.

	LTR.	REVISIONS	DATE
	Α	REDRAWN FROM SOL-LEAD, 12-1984	3-31-2003
	В	4.5 WAS 5.2, 3.0 WAS 3.4, .3 WAS .4	30MAY03



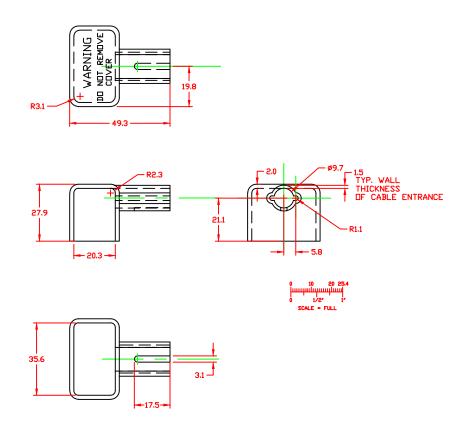

MATERIAL:

HARDNESS 10SEC.:
TENSILE STRENGTH, Psi:
ELONGATION, %:
TEAR STRENGTH, Ppi:
OXYGEN INDEX, %:

BLACK PVC (U.L. 94 Rated Material Available Upon Request)

65 SHORE "A" 1100 410 180 21.2 TOLERANCE UNLESS OTHERWISE SPECIFIED: ±.030"/±0.8mm RADIAL DIAMETERS TO BE MEASURED OVER MANDRELS, RING GAGES OR PIN GAGES OF SUITABLE SIZE

