


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED.

| LTR. | REVISIONS                       | DATE     |
|------|---------------------------------|----------|
| A    | ORIGINAL CONCEPT                | 29-SE-00 |
| B    | REVISED GRIP THICKNESS TO .004" | 12-FE-01 |

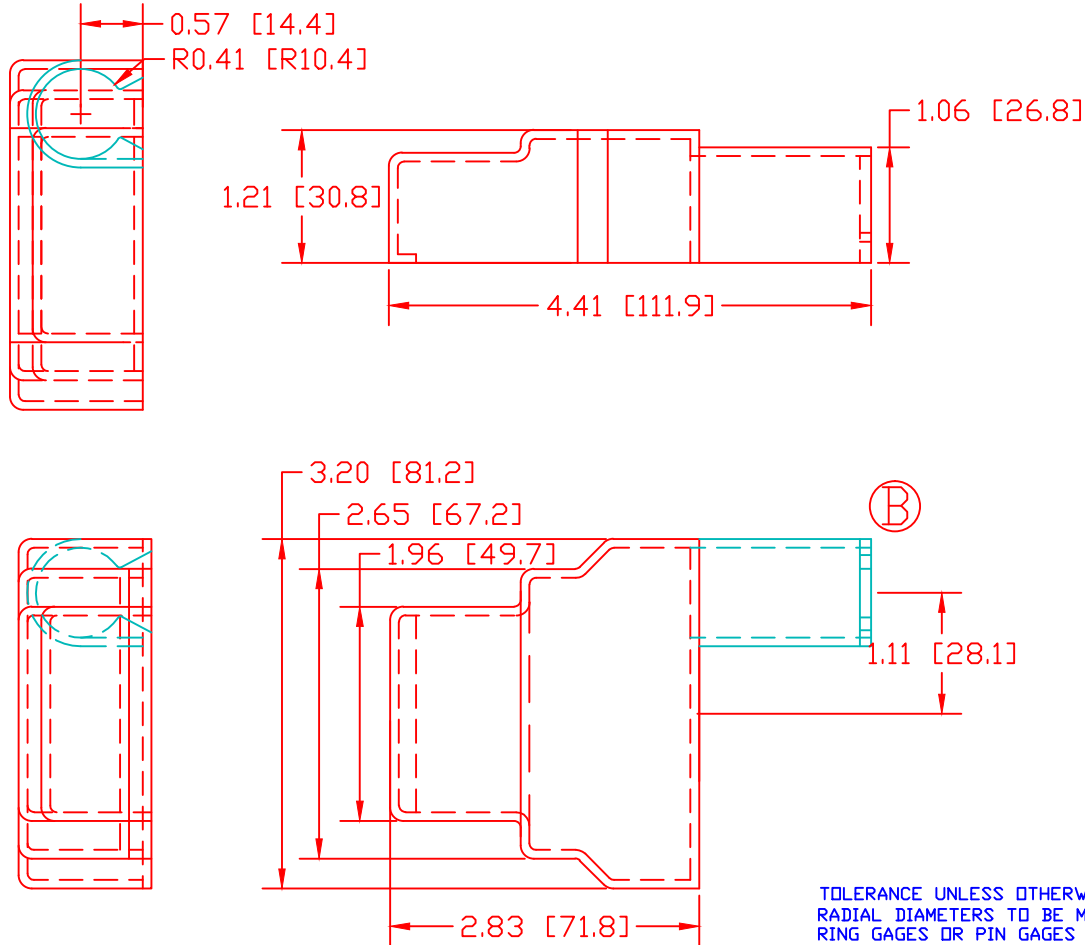

TOLERANCE UNLESS OTHERWISE SPECIFIED:  $\pm 0.30"/\pm 0.8\text{mm}$   
 RADIAL DIAMETERS TO BE MEASURED OVER MANDRELS,  
 RING GAGES OR PIN GAGES OF SUITABLE SIZE

VTE Material Part No:  
 Material:  
 Material Part No  
 Max. Operating Temp:  
 Shore Durometer  
 Specific Gravity:  
 Ult. Elongation %:  
 Tensile Strength PSI:  
 U.L. Rating:

1101700114  
 BLACK PVC  
 M1170-FR or Equivalent  
 105 C  
 "A" 15 SEC. 70+/-5  
 1.34  
 275 Minimum  
 1600 PSI Minimum  
 94 V0



VTE Incorporated  
 5437 Robinson Road, P.O. Box 790  
 Pellston, Michigan 49769  
 Telephone: 1-800-527-9256, 231-539-8000  
 FAX: 231-539-0914

|                                   |                 |             |                            |
|-----------------------------------|-----------------|-------------|----------------------------|
| REF: *****                        | DATE: 29-SE-00  | DRN BY: BRH | WEIGHT: 098 LBS. / 44.5 G. |
| TITLE: BATTERY TERMINAL INSULATOR |                 |             | SCALE: AS NOTED            |
| MATERIAL: AS NOTED                |                 | PART NO.    |                            |
| COLOR: AS NOTED                   | DRG CLASS ***** | 46R9F14     |                            |