
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED.

LTR.	REVISI□NS	DATE
₩	*****	00-00-98

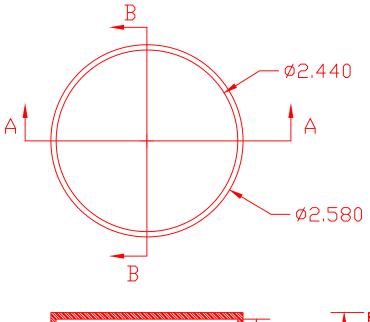

SECTION A-A 0,670 SECTION B-B

VTE Material Part No:
Material:
Material Part No
Max. Opertating Temp:
Shore Durometer
Specific Gravity:
Ult. Elongation %:
Brittle Temp:
Tensile Strength PSI:

U.L. Rating: MEETS: 1101650114 BLACK PVC 9812-65 105 C "A" 10 SEC. 67/63 1.33 520 -36 C 1563 PSI

94 V2 FMVSS.302



TOLERANCE UNLESS OTHERWISE SPECIFIED: ±.030"/±0.8mm RADIAL DIAMETERS TO BE MEASURED OVER MANDRELS, RING GAGES OR PIN GAGES OF SUITABLE SIZE



VTE Incorporated

5437 Robinson Road, P.D. Box 790 Pellston, Michigan 49769 Telephone: 1-800-527-9256, 231-539-8000 FAX: 231-539-0914

REF: DATE: DRN BY: BRH WEIGHT: MAX TITLE: BATTERY TERMINAL INSULATOR SCALE: NOTED

PART NO.

MATERIAL: NOTED

COLOR: NOTED

DRG CLASS ***** 481A9V14