
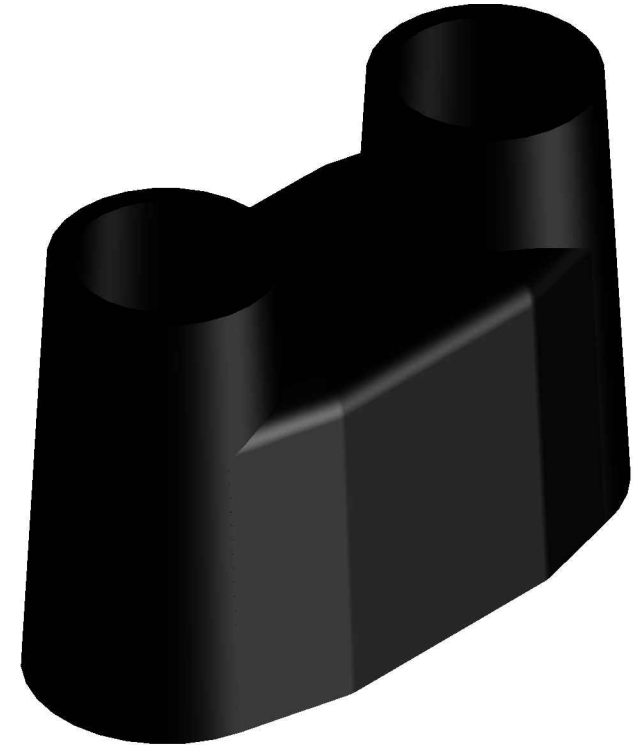
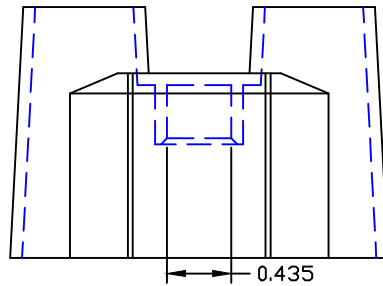
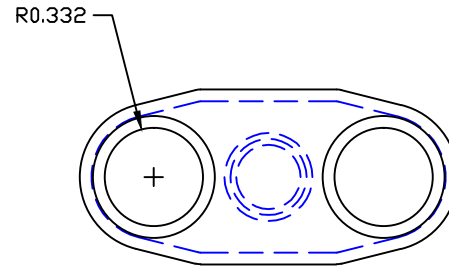



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED.

| LTR. | REVISIONS | DATE      |
|------|-----------|-----------|
| ≠    | *****     | 00-000-00 |



TOLERANCE UNLESS OTHERWISE SPECIFIED:  
 MOLDED PRODUCTS ONLY: ±.030"/±0.8mm  
 HARDWARE ITEMS: ±0.010"/±0.25mm  
 RADIAL DIAMETERS TO BE MEASURED OVER MANDRELS,  
 RING GAGES OR PIN GAGES OF SUITABLE SIZE

|                       |                   |
|-----------------------|-------------------|
| VTE Material Part No: | 1101650114        |
| Material:             | BLACK PVC         |
| Material Part No:     | 9812-65           |
| Max. Operating Temp:  | 105 C             |
| Shore Durometer:      | "A" 10 SEC. 67/63 |
| Specific Gravity:     | 1.33              |
| Ult. Elongation %:    | 520               |
| Brittle Temp:         | -36 C             |
| Tensile Strength PSI: | 1563 PSI          |
| U.L. Rating:          | 94 V2             |
| MEETS:                | FMVSS.302         |

|   |                 |   |                |
|---|-----------------|---|----------------|
|  |                 | <b>VTE Incorporated</b><br>5437 Robinson Road, P.O. Box 790<br>Pellston, Michigan 49769<br>Telephone: 1-800-527-9256, 231-539-8000<br>FAX: 231-539-0914 |                |
|   |                 | REF: *****  | DATE: 6-9-2014 |
| TITLE: BATTERY TERMINAL INSULATOR   |                 |   | SCALE:         |
| MATERIAL:   |                 | PART NO.  |                |
| COLOR: *****  | DRG CLASS ***** | 482N9V14  |                |