

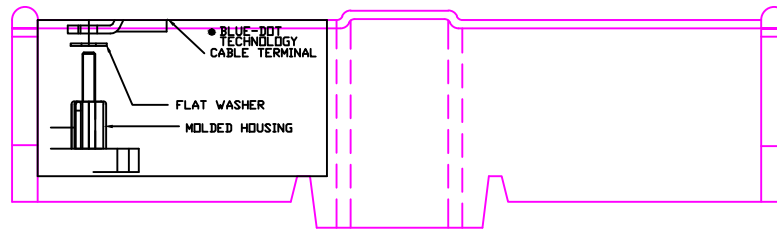


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED.


LTR.	REVISIONS	DATE
A	ADDED P/N 16803040014 LABEL, FUSE REPLACEMENT	06SEP07
B	MATERIAL WAS CLEAR PVC	07JUL15

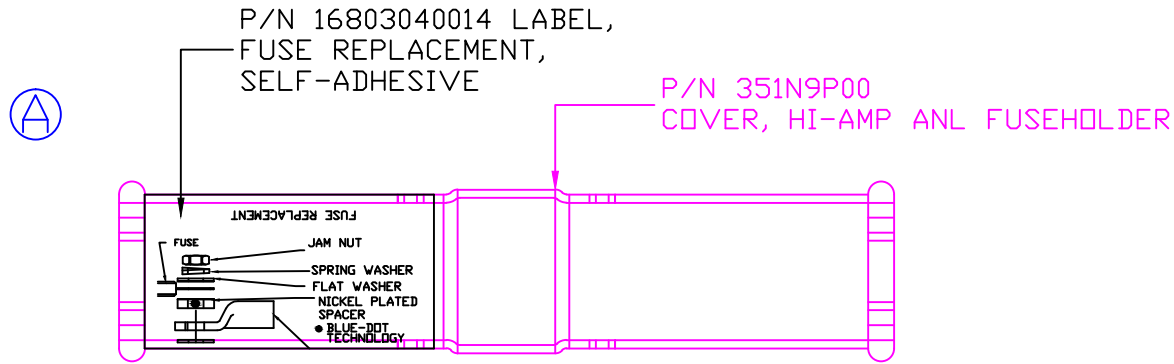

B

Material: Polypropylene Random Copolymer
 Material Part No: COPYLENE CR350CL-02 or Equivalent
 Max. Operating Temp: 170 Deg. F.
 Durometer: 55-75 Shore D
 Specific Gravity: .902
 Ult. Elongation %: 13.6
 Modulus PSI: 145000
 Tensile Strength PSI: 4000

TOLERANCE UNLESS OTHERWISE SPECIFIED: ±0.30*/±0.8mm
 RADIAL DIAMETERS TO BE MEASURED OVER MANDRELS,
 RING GAGES OR PIN GAGES OF SUITABLE SIZE

		VTE Incorporated 5437 Robinson Road, P.O. Box 790 Pellston, Michigan 49769 Telephone: 1-800-527-9256, 231-539-8000 FAX: 231-539-0914	
		REF: *****	DATE: 23JUN05
TITLE: COVER, HI-AMP ANL FUSE HOLDER			SCALE:
MATERIAL:		PART NO.	
COLOR: *****	DRG CLASS *****	751N9P00	