
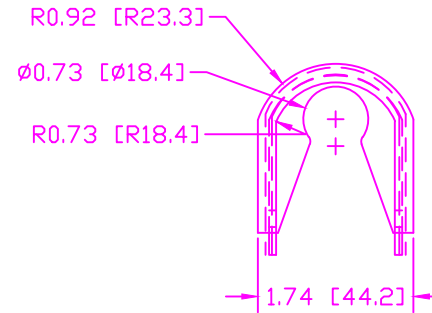
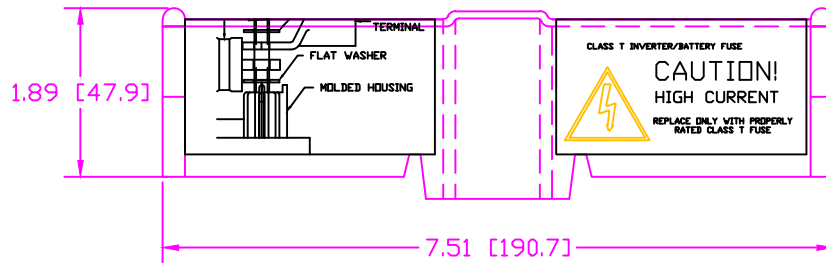


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED.

LTR.	REVISIONS	DATE
A	ADDED P/N 16803040001 FUSE REPLACEMENT LABEL	06SEP07
B	MATERIAL WAS CLEAR PVC	07JUL15

(A)

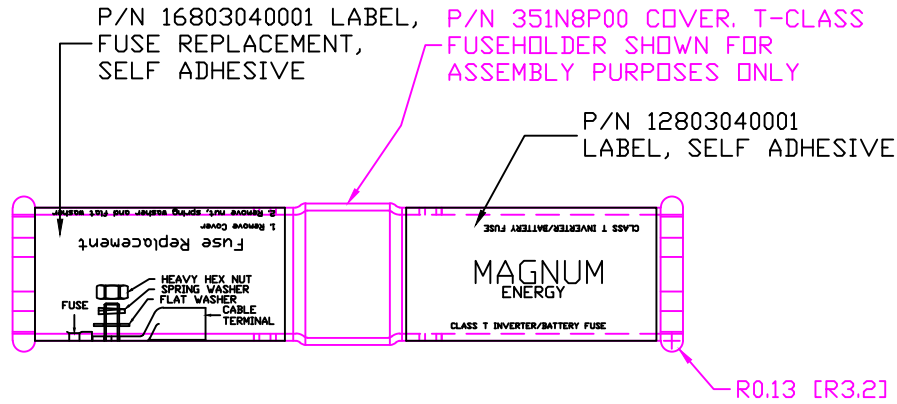


(B)

Material:
 Material Part No:
 Max. Operating Temp:
 Durometer:
 Specific Gravity:
 Ult. Elongation %:
 Modulus PSI:
 Tensile Strength PSI:

Polypropylene Random Copolymer
 COPYLENE CR350CL-02 or Equivalent
 170 Deg. F.
 55-75 Shore D
 .902
 13.6
 145000
 4000



TOLERANCE UNLESS OTHERWISE SPECIFIED: ±0.30*/±0.8mm
 RADIAL DIAMETERS TO BE MEASURED OVER MANDRELS,
 RING GAGES OR PIN GAGES OF SUITABLE SIZE

		VTE Incorporated 5437 Robinson Road, P.O. Box 790 Pellston, Michigan 49769 Telephone: 1-800-527-9256, 231-539-8000 FAX: 231-539-0914	
		REF: ***	DATE: 26MAR07
TITLE: COVER ASM, T-CLASS, MAGNUM ENERGY			SCALE:
MATERIAL:		PART NO.	
COLOR: ***	DRG CLASS: ***	751X8P00	