




THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED.

LTR.	REVISIONS	DATE

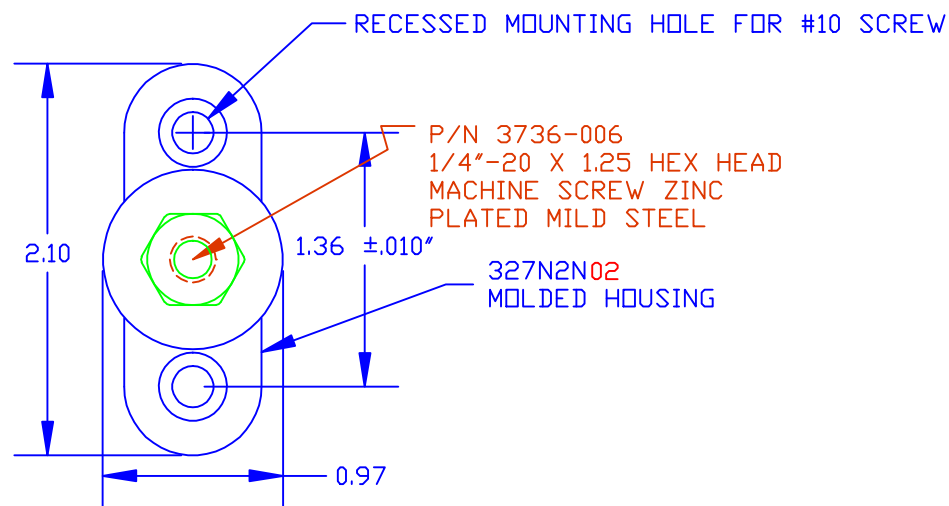

DO NOT
SCALE


P/N 3842-004 1/4"-20 ZINC PLATED
MILD STEEL HEAVY HEX JAM NUT
BOTTOM NUT FACTORY INSTALLED TO
72 IN./LBS.

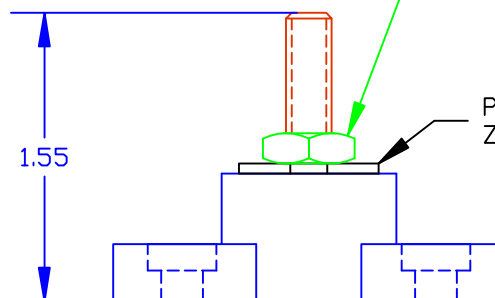

329N0V02
CAVITY PLUG

TOLERANCE UNLESS OTHERWISE SPECIFIED: ±.030"/±0.8mm
RADIAL DIAMETERS TO BE MEASURED OVER MANDRELS,
RING GAGES OR PIN GAGES OF SUITABLE SIZE

BASE MATERIAL: GLASS-REINFORCED NYLON
BASE MATERIAL U.L. RATING: 94 HB
DIELECTRIC STRENGTH: 630 VOLTS/MIL PER ASTM D149
VOLTAGE RATING: 48 VDC MAX.
CURRENT RATING: 165 AMPS @ 12 VDC
TEMP. RISE AT LOAD: 52 DEG. F.
MAXIMUM RECOMMENDED TORQUE: 60 IN./LBS.

		VTE Incorporated 5437 Robinson Road, P.O. Box 790 Pellston, Michigan 49769 Telephone: 1-800-527-9256, 231-539-8000 FAX: 231-539-0914	
REF: *****	DATE: 30OCT12	DRN BY: BRH	WEIGHT: *****
TITLE: 1/4" SMALL JUNCTION STUD ECONOMY VERSION		CHK'D BY: BRH	SCALE:
MATERIAL:		PART NO.	
COLOR: RED	DRG CLASS *****	77025E N02	