

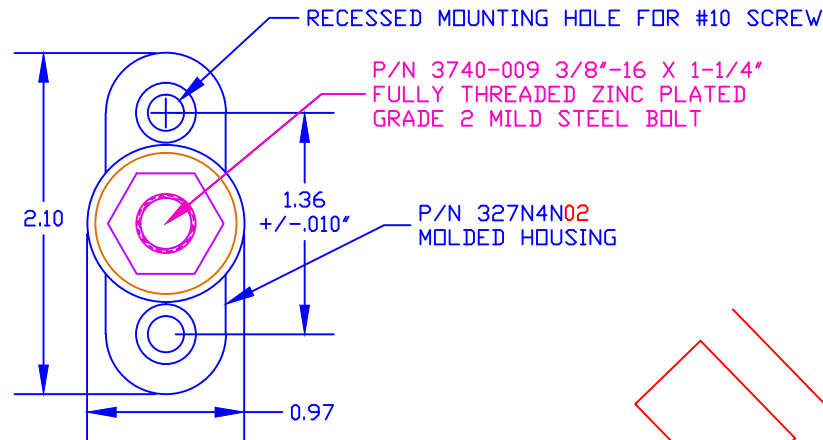


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED.

LTR.	REVISIONS	DATE
A	3638-001 WAS 3641-001	21MAR07
B	ADDED OPTIONAL P/N 3646-002	30OCT12

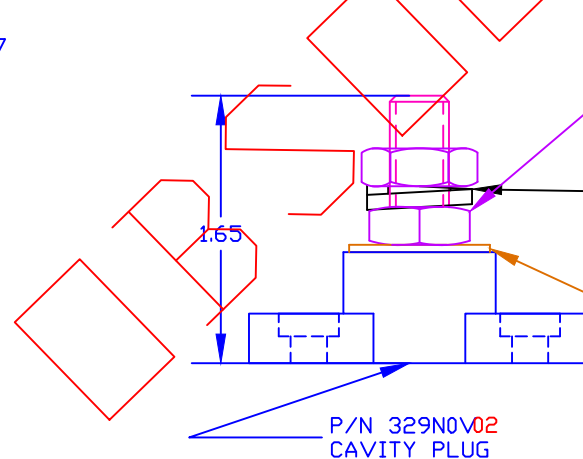

DO NOT SCALE




P/N 3844-004 3/8"-16 ZINC PLATED MILD STEEL HEX JAM NUT 2 PLCS. FACTORY ASSEMBLED TO 15 FT./LBS (180 IN./LBS)

P/N 3638-001 3/8" ZINC PLATED MILD STEEL SPRING WASHER

P/N 3646-000 3/8" STAINLESS FLAT WASHER
OPTIONAL CONSTRUCTION:
P/N 3646-002 3/8" ZINC PLATED MILD STEEL FLAT WASHER
OPTIONAL CONSTRUCTION NOTE:
COLOR OF BOLT CAVITY PLUG ON BOTTOM OF ASSEMBLY MAY VARY

TOLERANCE UNLESS OTHERWISE SPECIFIED: $\pm 0.30"/\pm 0.8mm$
RADIAL DIAMETERS TO BE MEASURED OVER MANDRELS,
RING GAGES OR PIN GAGES OF SUITABLE SIZE

BASE MATERIAL: GLASS-REINFORCED NYLON
BASE MATERIAL U.L. RATING: 94 HB
DIELECTRIC STRENGTH: 630 VOLTS/MIL PER ASTM D149
VOLTAGE RATING: 48 VDC MAX.
CURRENT RATING: 250 AMPS @12 VDC
TEMP. RISE AT LOAD: 52 DEG. F.
RECOMMENDED MAXIMUM TORQUE: 12 FT./LBS. (144 IN./LBS.)

		VTE Incorporated 5437 Robinson Road, P.O. Box 790 Pellston, Michigan 49769 Telephone: 1-800-527-9256, 231-539-8000 FAX: 231-539-0914	
		REF: ****	DATE: 19FEB07
TITLE: COMMERCIAL VERSION 3/8" SMALL JUNCTION POST		SCALE: NONE	
MATERIAL: NOTED		PART NO.	
COLOR: RED	DRG CLASS	77037CN02	