



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED.

LTR.	REVISIONS	DATE
✖	*****	00-00-98

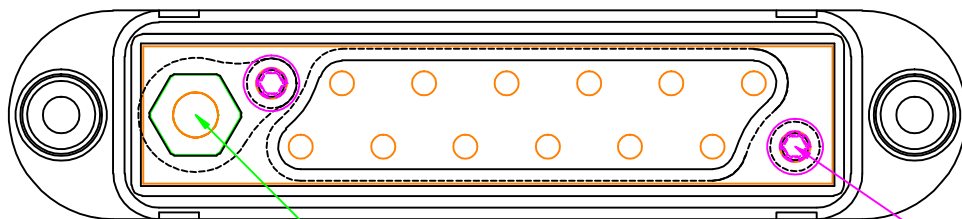


P/N 3736-002 1/4"-20 X .750"
S.S. HEX HEAD MACHINE SCREW

P/N 3872 #8-16 TORX PLUS
THREAD FORMING SCREW (2 REQ'D)

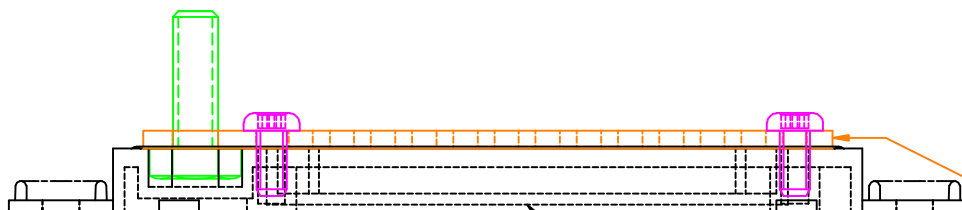

P/N 31225N0 N02
MOLDED BASE


P/N 3873 NICKEL
PLATED BRASS ALLOY
BUS STRIP



TOLERANCE UNLESS OTHERWISE SPECIFIED: ±.030"/±0.8mm
RADIAL DIAMETERS TO BE MEASURED OVER MANDRELS,
RING GAGES OR PIN GAGES OF SUITABLE SIZE

BASE MATERIAL: GLASS-REINFORCED NYLON
BASE MATERIAL U.L. RATING: 94 HB

TESTED AT 240 AMPS @ 12VDC FOR 30 MINUTES, MAXIMUM
TEMPERATURE RISE WAS 7.8 DEG. C. MAXIMUM
TEMPERATURE RECORDED WAS 30.6 DEG. C.

		VTE Incorporated 5437 Robinson Road, P.O. Box 790 Pellston, Michigan 49769 Telephone: 1-800-527-9256, 231-539-8000 FAX: 231-539-0914	
		REF: *****	DATE: 22AUG05
TITLE: 12-POINT TERMINAL STRIP			SCALE:
MATERIAL:		PART NO.	
COLOR: *****	DRG CLASS *****	7712N002	