



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED.

LTR.	REVISIONS	DATE
≡	*****	00-00-98

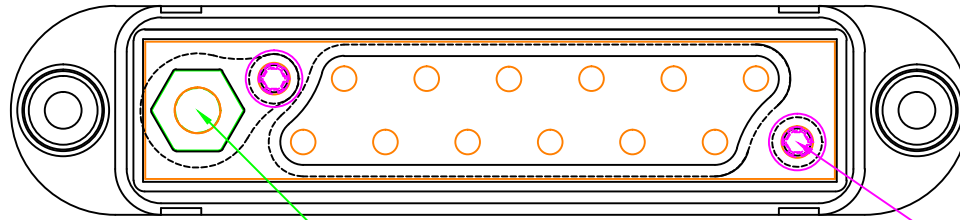


P/N 3736-002 1/4"-20 X .750"
S.S. HEX HEAD MACHINE SCREW

P/N 3872 #8-16 TORX PLUS
THREAD FORMING SCREW (2 REQ'D)

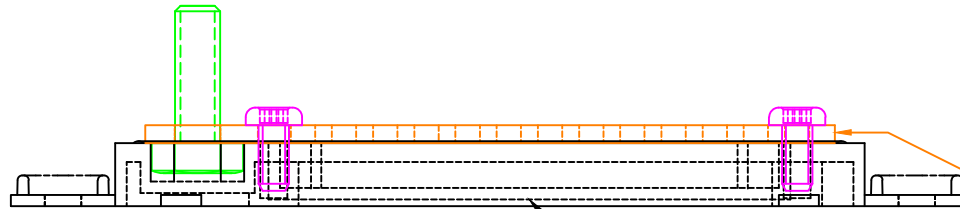

P/N 3873 NICKEL
PLATED BRASS ALLOY
BUS STRIP

P/N 31225 N02
MOLDED BASE



TOLERANCE UNLESS OTHERWISE SPECIFIED: ±.030"/±0.8mm
RADIAL DIAMETERS TO BE MEASURED OVER MANDRELS,
RING GAGES OR PIN GAGES OF SUITABLE SIZE

BASE MATERIAL: GLASS-REINFORCED NYLON
BASE MATERIAL U.L. RATING: 94 HB

TESTED AT 240 AMPS @ 12VDC FOR 30 MINUTES, MAXIMUM
TEMPERATURE RISE WAS 7.8 DEG. C. MAXIMUM
TEMPERATURE RECORDED WAS 30.6 DEG. C.



VTE Incorporated
5437 Robinson Road, P.O. Box 790
Pellston, Michigan 49769
Telephone: 1-800-527-9256, 231-539-8000
FAX: 231-539-0914

REF: *****	DATE: 22AUG05	DRN BY: BRH	WEIGHT: *****
TITLE: 12-POINT TERMINAL STRIP			SCALE:
MATERIAL:		PART NO.	
COLOR: *****	DRG CLASS *****	7712N002	