
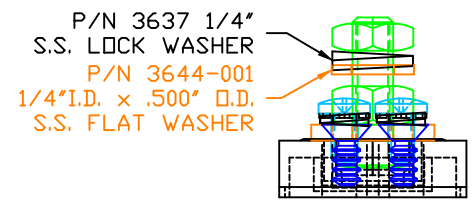
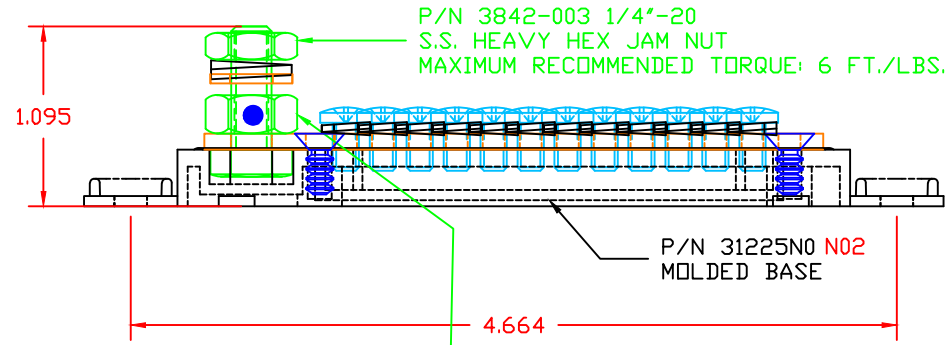


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED.

LTR.	REVISIONS	DATE	INT.
△	REMOVED SUB-ASSEMBLY NOTE P/N 73873-003	02FEB16	RAS

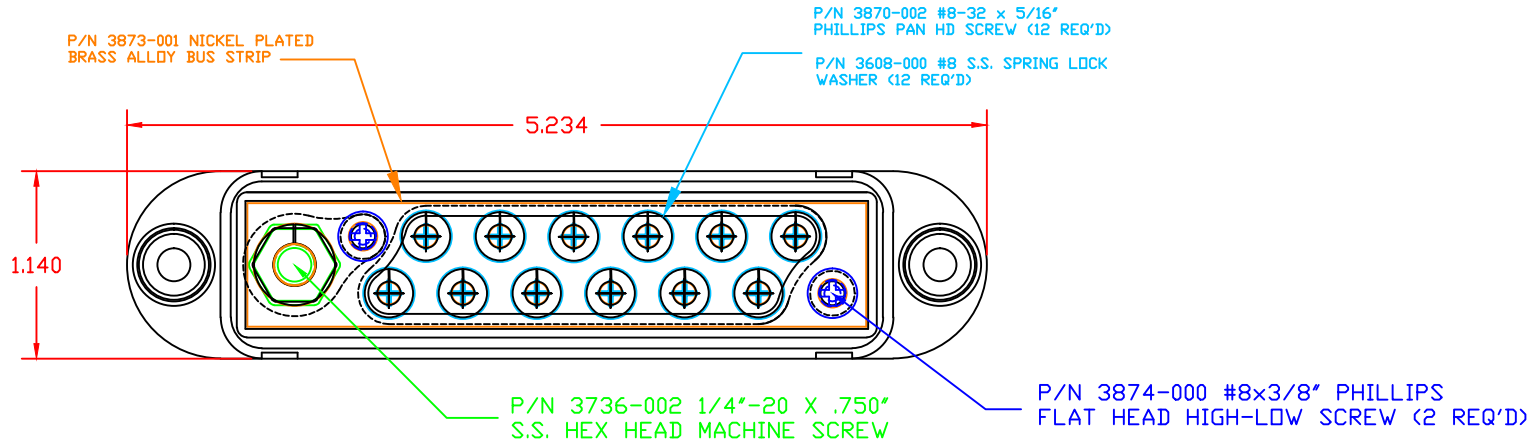

TOLERANCE UNLESS OTHERWISE SPECIFIED: ±.030"/±0.8mm
 RADIAL DIAMETERS TO BE MEASURED OVER MANDRELS,
 RING GAGES OR PIN GAGES OF SUITABLE SIZE

BASE MATERIAL: GLASS-REINFORCED NYLON
 BASE MATERIAL U.L. RATING: 94 HB
 INCLUDES P-16808110001 BLUE DOT MULTI LABEL, 1 PER CONTAINER

TESTED AT 240 AMPS @ 12VDC FOR 30 MINUTES, MAXIMUM
 TEMPERATURE RISE WAS 7.8 DEG. C. MAXIMUM
 TEMPERATURE RECORDED WAS 30.6 DEG. C.

VTE Incorporated
 5437 Robinson Road, P.O. Box 790
 Pellston, Michigan 49769
 Telephone: 1-800-527-9256, 231-539-8000
 FAX: 231-539-0914

REF: *****	DATE: 08JUN09	DRN BY: BRH	WEIGHT: *****
TITLE: 12-POINT TERMINAL STRIP SPECIAL FOR CRIMSON-FIRE			SCALE:
MATERIAL:		PART NO.	
COLOR: *****	DRG CLASS *****	7712X0N02	