


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED.

LTR.	REVISIONS	DATE	INT.
△	REMOVED SUB-ASSEMBLY NOTE P/N 73873-003	02FEB16	RAS

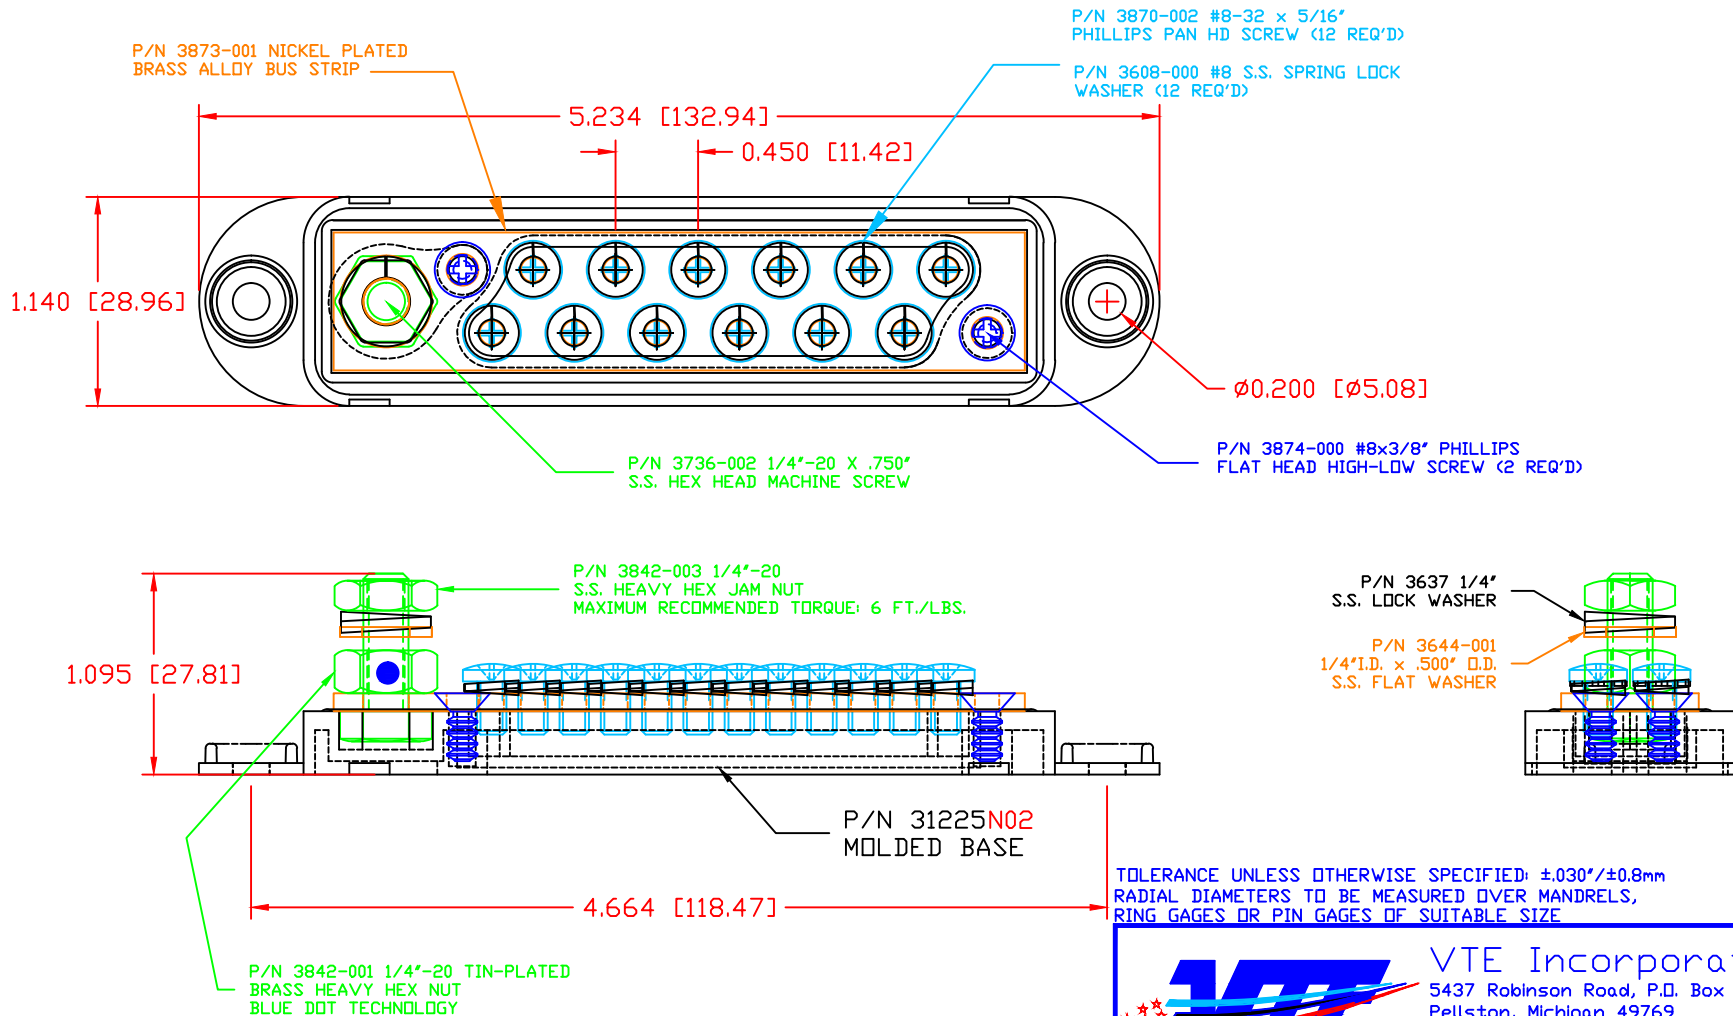

TOLERANCE UNLESS OTHERWISE SPECIFIED: ±.030"/±0.8mm  
 RADIAL DIAMETERS TO BE MEASURED OVER MANDRELS, RING GAGES OR PIN GAGES OF SUITABLE SIZE

BASE MATERIAL: GLASS-REINFORCED NYLON  
 BASE MATERIAL U.L. RATING: 94 HB  
 INCLUDES P-16808110001 BLUE DOT MULTI LABEL, 1 PER CONTAINER

TESTED AT 240 AMPS @ 12VDC FOR 30 MINUTES, MAXIMUM TEMPERATURE RISE WAS 7.8 DEG. C. MAXIMUM TEMPERATURE RECORDED WAS 30.6 DEG. C.



**VTE Incorporated**  
 5437 Robinson Road, P.O. Box 790  
 Pellston, Michigan 49769  
 Telephone: 1-800-527-9256, 231-539-8000  
 FAX: 231-539-0914

REF: *****	DATE: 08JUN09	DRN BY: BRH	WEIGHT: *****
TITLE: 12-POINT TERMINAL STRIP SPECIAL FOR CRIMSON-FIRE			SCALE:
MATERIAL:		PART NO.	
COLOR: *****	DRG CLASS *****	7712X0N02	