


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED.

LTR.	REVISIONS	DATE
△	ADDED SPACER 330N3***	19DEC13

VTE MAKES NO WARRANTY, EXPRESSED OR IMPLIED, AS TO THE SUITABILITY OF A PRODUCT FOR ANY INTENDED USE. THE CUSTOMER SHALL BEAR THE SOLE RESPONSIBILITY OF DETERMINING THE SUITABILITY OF ANY VTE PRODUCT FOR ITS END USE.

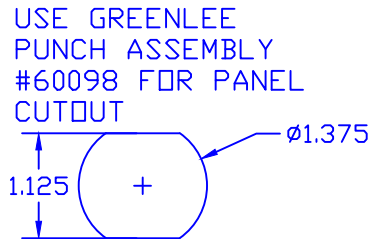

P/N 3531N14
3/8" INNER PANEL BUSHING
FOR 1/8" PANEL THICKNESS

P/N 3730-011
5/16"-18 UNC-2A X 1.5"
FULLY THREADED S.S. BOLT

P/N 3642-000
STAINLESS STEEL
SPRING WASHER

BLUE DOT TECHNOLOGY
P/N 3843-000
5/16"-18 HEAVY JAM NUT
270/360 BRASS ALLOY
ROCKWELL HARDNESS B55 MINIMUM
TENSILE STRENGTH 55,000 PSI MINIMUM
TIN PLATED

P/N 3438N14 3/8" OUTER PANEL
BUSHING (WEATHERPROOF)

321N9V14
TERMINAL COVER

3860-007 HEX CAP NUT
P/N 330N3N*** SPACER
(AS REQ'D BY INSTRUCTION
SHEET #16805110901)

P/N 3645-000
18-8 STAINLESS STEEL
FLAT WASHER

DO NOT SCALE

INCLUDES P-16808110001 BLUE DOT MULTI LABEL, 1 PER CONTAINER
MAXIMUM AMPERAGE: 50 AMPS@ 12VDC

BASE MATERIAL:
BASE MATERIAL U.L. RATING:

GLASS-REINFORCED NYLON
94 HB

TOLERANCE UNLESS OTHERWISE SPECIFIED: ±0.030"/±0.8mm
RADIAL DIAMETERS TO BE MEASURED OVER MANDRELS,
RING GAGES OR PIN GAGES OF SUITABLE SIZE



VTE Incorporated
5437 Robinson Road, P.O. Box 790
Pellston, Michigan 49769
Telephone: 1-800-527-9256, 231-539-8000
FAX: 231-539-0914

REF: 7B3731	DATE: 06AUG03	DRN BY: BRH CHK'D BY: BRH	WEIGHT: ***
TITLE: POWER CONNECTOR, AUX. 5/16" STUD 1/4" MAX PANEL			SCALE:
MATERIAL:		PART NO.	
COLOR: ****	DRG CLASS: ****	7A3131 14	