


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED.

LTR.	REVISIONS	DATE
⏏	ADDED PERFORMANCE SPECIFICATIONS	20NDV07

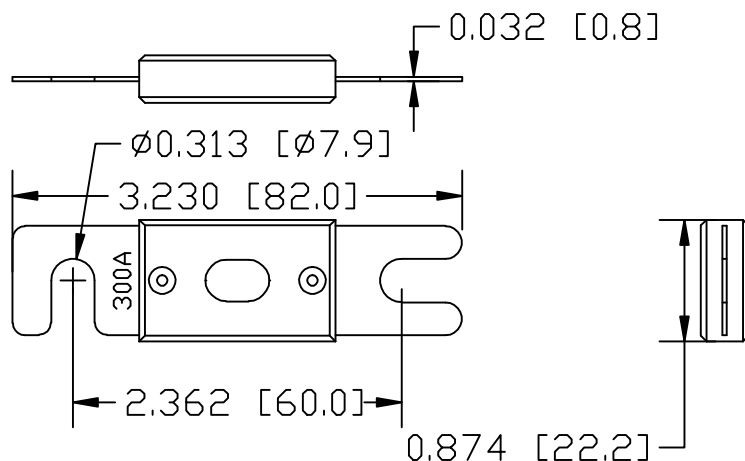

AMPERE RATING
300
350
400
500

SPECIFICATION:


- * Fast Acting Type
- * Visible Through Mica Window
- * Metal Elements are 24 Kt. Gold Plated
- * Body Material: CERAMIC
- * Interrupt Rating: 3000A 32V DC
- * Replaces ANL Fuses
- * High Performance Good for High Power Audio Systems, Lift Trucks and other Battery Operated Systems

Ⓐ

DO NOT SCALE

% of Ampere Rating	BLOW TIME
100 % Rating	4 Hours, Minimum
250 % Rating	300 Sec., Maximum

TOLERANCE UNLESS OTHERWISE SPECIFIED: ±0.30/±0.8mm
 RADIAL DIAMETERS TO BE MEASURED OVER MANDRELS,
 RING GAGES OR PIN GAGES OF SUITABLE SIZE



VTE Incorporated
 5437 Robinson Road, P.O. Box 790
 Pellston, Michigan 49769
 Telephone: 1-800-527-9256, 231-539-8000
 FAX: 231-539-0914

REF: *****	DATE: 07DEC04	DRN BY: BRH	WEIGHT: *****
TITLE: ANL CERAMIC FUSES CHARTED		CHK'D BY: BRH	SCALE:
MATERIAL:		PART NO.	
COLOR: *****	DRG CLASS *****	ANFC340***	