


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED.

LTR.	REVISIONS	DATE

MAKE FROM: P/N 7374M

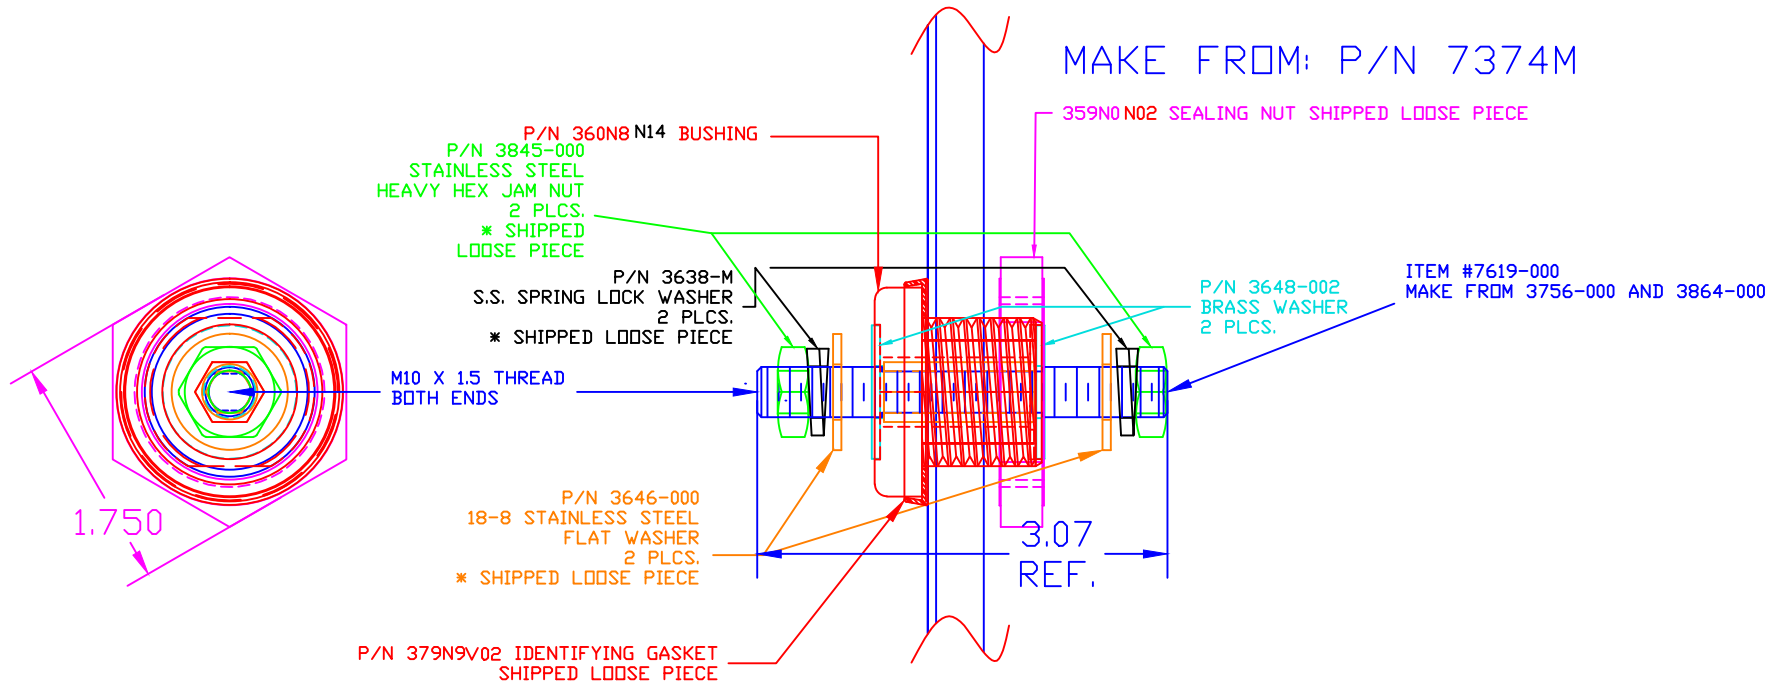


OBSOLETE

MAXIMUM FASTENER TORQUES:  
 JAM NUTS: 15 FT./LBS. (180 IN./LBS.)  
 SEALING NUT: 10 FT./LBS. (120 IN./LBS.)


CURRENT CARRYING CAPACITY: 350 AMPS @ 12VDC

BASE MATERIAL:  
 BASE MATERIAL U.L. RATING:  
 VTE MATERIAL P/N:

GLASS-REINFORCED NYLON  
 94 HB  
 1111210514



TOLERANCE UNLESS OTHERWISE SPECIFIED:  
 MOLDED PRODUCTS ONLY: ±.030"/±0.8mm  
 HARDWARE ITEMS: ±0.010"/±0.25mm  
 RADIAL DIAMETERS TO BE MEASURED OVER MANDRELS,  
 RING GAGES OR PIN GAGES OF SUITABLE SIZE

		<b>VTE Incorporated</b> 5437 Robinson Road, P.O. Box 790 Pellston, Michigan 49769 Telephone: 1-800-527-9256, 231-539-8000 FAX: 231-539-0914	
		REF: ***	DATE: 21JAN11
TITLE: POWER BUSHING, BRASS CORE 350 AMP (M10 X 1.5 METRIC)			SCALE:
MATERIAL:		PART NO.	
COLOR: ***	DRG CLASS: ***	BCB374M0N02	