


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED.

LTR.	REVISIONS	DATE
⌒	3 PLCS. WAS 2 PLCS.	02MAY12

MAKE FROM: P/N 7376M

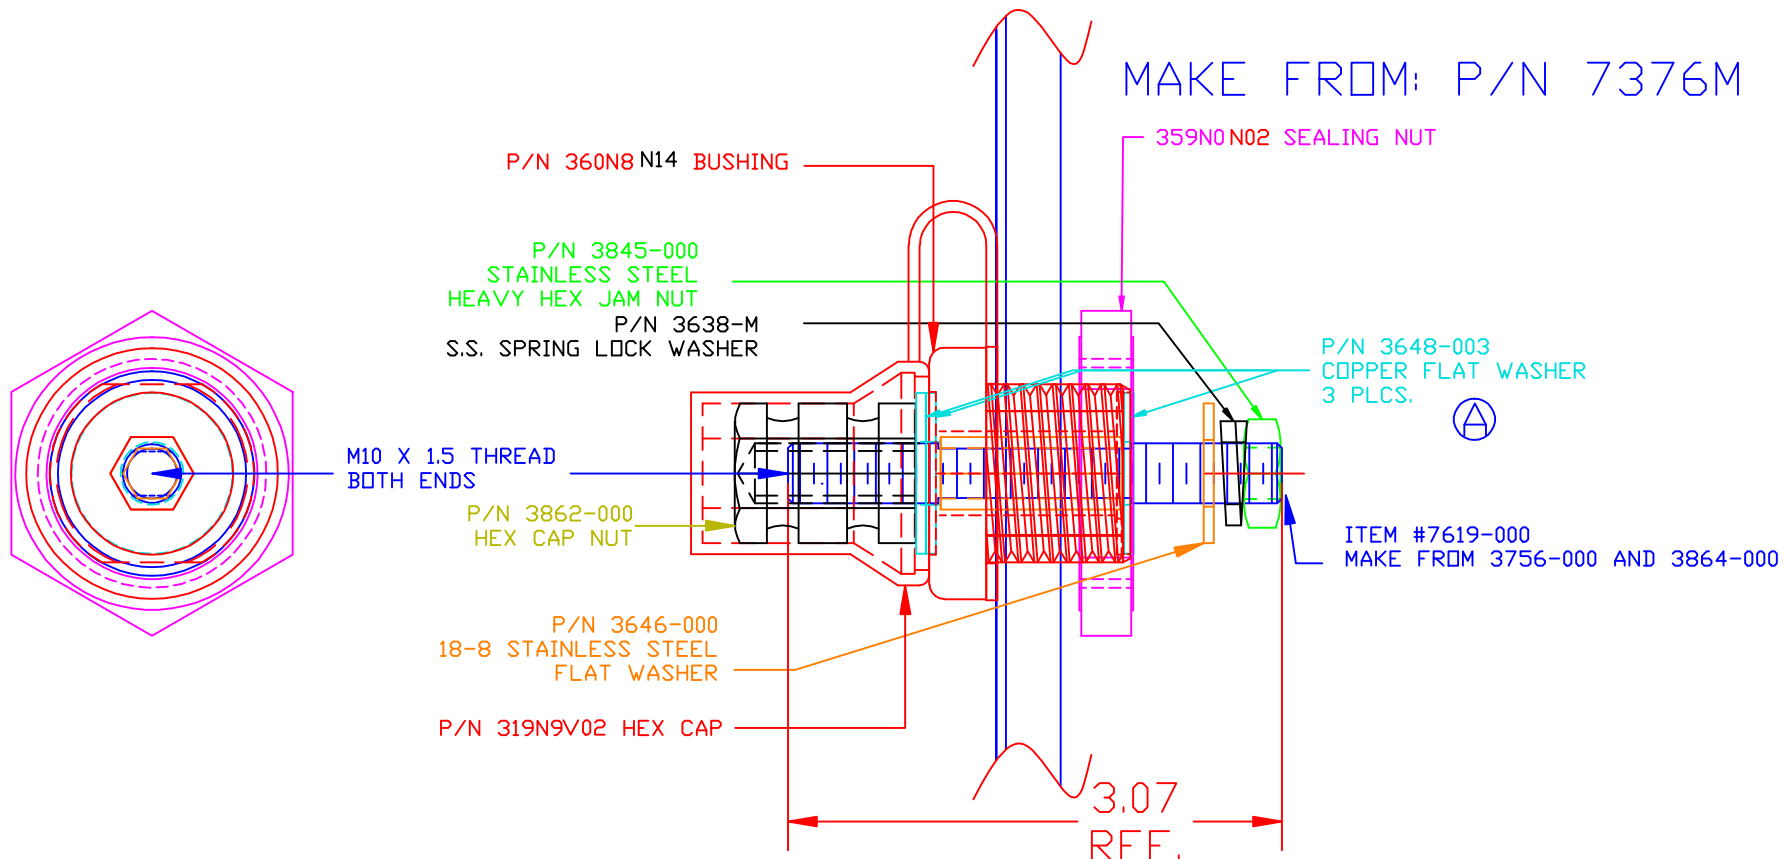



MAXIMUM FASTENER TORQUES:  
 JAM NUTS: 15 FT./LBS. (180 IN./LBS.)  
 SEALING NUT: 10 FT./LBS. (120 IN./LBS.)

CURRENT CARRYING CAPACITY: 550 AMPS @ 12VDC

BASE MATERIAL: GLASS-REINFORCED NYLON  
 BASE MATERIAL U.L. RATING: 94 HB  
 VTE MATERIAL P/N: 111210514

TOLERANCE UNLESS OTHERWISE SPECIFIED:  
 MOLDED PRODUCTS ONLY: ±0.30"/±0.8mm  
 HARDWARE ITEMS: ±0.010"/±0.25mm  
 RADIAL DIAMETERS TO BE MEASURED OVER MANDRELS,  
 RING GAGES OR PIN GAGES OF SUITABLE SIZE





**VTE Incorporated**  
 5437 Robinson Road, P.O. Box 790  
 Pellston, Michigan 49769  
 Telephone: 1-800-527-9256, 231-539-8000  
 FAX: 231-539-0914

REF: *****	DATE: 26MAY10	DRN BY: BRH	WEIGHT: *****
TITLE: POWER BUSHING COPPER CORE JUMPER 550 AMP (M10 X 1.5 METRIC)		CHK'D BY: BRH	SCALE:
MATERIAL:		PART NO. HDJC376M0N02	
COLOR: *****	DRG CLASS *****		