THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED.VTE MAKES NO WARRANTY, EXPRESSED OR IMPLIED, AS TO THE SUITABILITY OF A PRODUCT FOR ANY INTENDED USE. THE CUSTOMER SHALL BEAR THE SOLE RESPONSIBILITY OF DETERMINING THE SUITABILITY OF ANY VTE PRODUCT FOR ITS END USE.

| LTR. | REVISIONS | DATE | INT. |
|---|---|---|---|
| A | UPDATED DIMENSION 77.8 WAS 79.7 | 12-09-12 | JC |
| B | ADDED REFERENCE DIMENSION | 02-25-16 | RAS |
| C | UPDATED BLUE MATERIAL INFORMATION | 08-01-22 | RAS |
| D | 1.750 [44.45] WAS 1.676 [42.57]. | 09-25-23 | RAS |

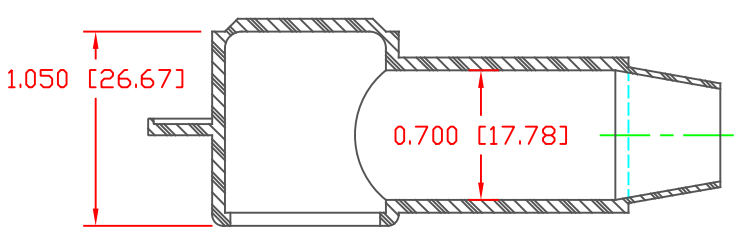


SECTION A-A
TYP. WALL THICKNESS = .070" [1.8]
SEAL NO. 3 SHOWN

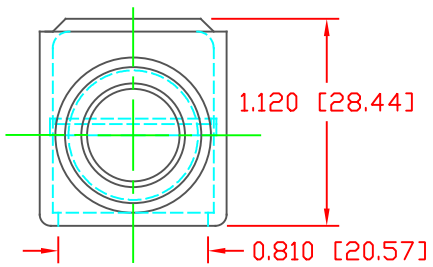


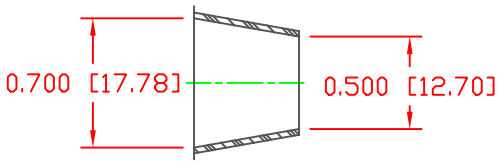


SEAL THICKNESS = .030" [.8]
NO. 3
Cable Gages
2 - 2/0

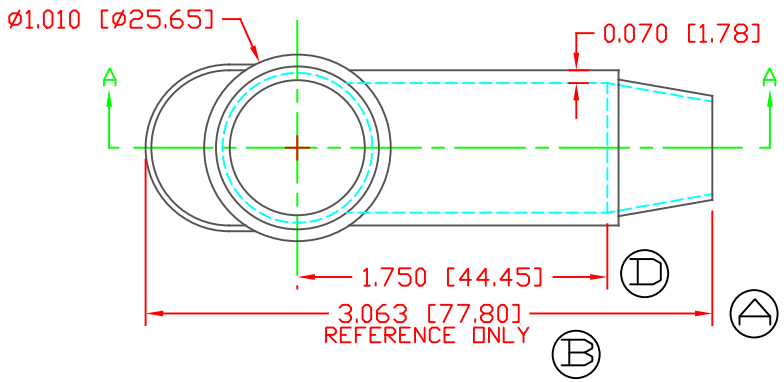


| | |
|---|---|
| MATERIAL PART NO: | 1101650102 |
| MATERIAL: | PVC |
| VENDOR PART NO: | 9812-65-RED 683 |
| SHORE DUROMETER: | "A" 10 SEC. 65 |
| SPECIFIC GRAVITY: | 1.34 |
| ULT. ELONGATION %: | 400 |
| MELTING TEMP: | 315-335 F [157-168 C] |
| BRITTLE TEMP: | -54 F [-48 C] |
| Tensile Strength PSI: | 1550 PSI |
| Dielectric Strength, v./mil | 511 |
| U.L. Rating: | V2 |

DO NOT SCALE

SCALE FACTOR : NONE
ALL DIMENSIONS GIVEN AS: in [mm]
TOLERANCES UNLESS OTHERWISE SPECIFIED :
MOLDED PARTS: ±.030" [±0.8mm]
ALL ANGLES ARE ± 1 DEGREE

VTE Incorporated
5437 Robinson Road, P.O. Box 790
Pellston, Michigan 49769
Telephone: 1-800-527-9256, 231-539-8000
FAX: 231-539-0914

| REF: | DATE: | DRN BY: JC | WEIGHT: |
|---|---|---|---|
| CUSTOMER DIMS | 03-24-98 | CHK'D BY: JC | .025 LBS [11.5 g] |

| | | |
|---|---|---|
| TITLE: | TERMINAL INSULATOR CAP | |
| MATERIAL: PVC | | PART NO. 222E3V02 |
| COLOR: RED | DRG CLASS REV D | |