



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED. VTE MAKES NO WARRANTY, EXPRESSED OR IMPLIED, AS TO THE SUITABILITY OF A PRODUCT FOR ANY INTENDED USE. THE CUSTOMER SHALL BEAR THE SOLE RESPONSIBILITY OF DETERMINING THE SUITABILITY OF ANY VTE PRODUCT FOR ITS END USE.

LTR.	REVISIONS	DATE	INT.
△	UPDATED MATERIAL INFORMATION	8-02-22	RAS

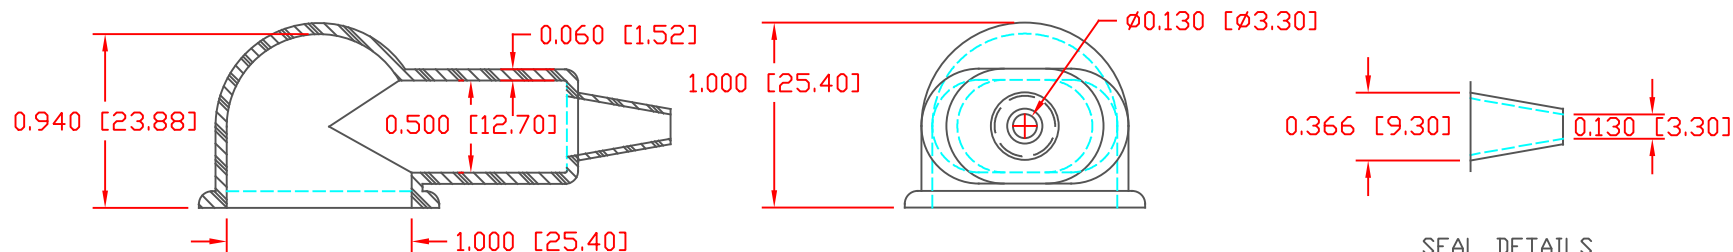

SECTION A-A  
TYP. WALL THICKNESS = .060" [1.5]

SEAL DETAILS  
SEAL THICKNESS = .030" [.8]  
SEAL TOLERANCE: +.030/-0.010 [+0.8/-0.25]  
WIRE GAGES: 18 - 10

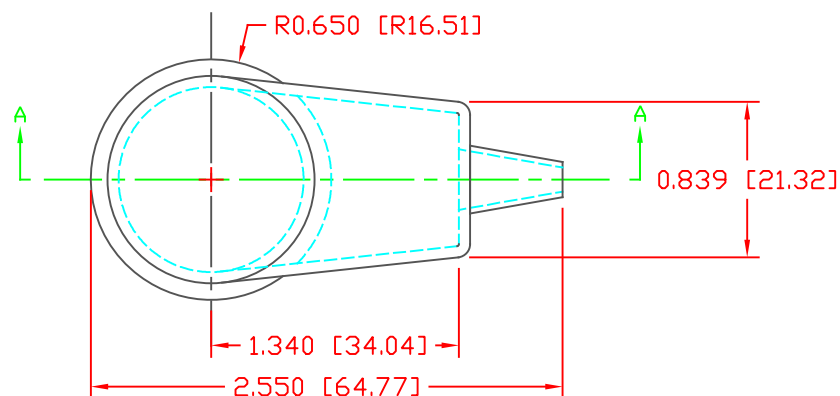


SCALE FACTOR : NONE  
ALL DIMENSIONS GIVEN AS: in [mm]  
TOLERANCES UNLESS OTHERWISE SPECIFIED :  
MOLDED PARTS: ±.030" [±0.8mm]  
ALL ANGLES ARE ± 1 DEGREE



VTE PART NO: 1101650102  
MATERIAL: PVC  
VENDOR PART NO: 9812-65-RED 683  
SHORE DUROMETER: "A" 10 SEC. 65  
SPECIFIC GRAVITY: 1.34  
ULT. ELONGATION %: 400  
MELTING TEMP: 315-335 F [157-168 C]  
BRITTLE TEMP: -54 F [-48 C]  
TENSILE STRENGTH PSI: 1550 PSI  
DIELECTRIC STRENGTH, V./mil: 511  
U.L. RATING: V2

DO NOT SCALE

		VTE Incorporated	
		5437 Robinson Road, P.O. Box 790 Pellston, Michigan 49769 Telephone: 1-800-527-9256, 231-539-8000 FAX: 231-539-0914	
REF:	DATE:	DRN BY:	BRH
CUSTOMER DIMS	02-14-05	CHK'D BY:	BRH
TITLE: EYELET TERMINAL INSULATOR			
MATERIAL: PVC		PART NO.	
COLOR: RED	DRG CLASS REV A	405N1V02	
WEIGHT:		.019 LBS [8.48 g]	