

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED. VTE MAKES NO WARRANTY, EXPRESSED OR IMPLIED, AS TO THE SUITABILITY OF A PRODUCT FOR ANY INTENDED USE. THE CUSTOMER SHALL BEAR THE SOLE RESPONSIBILITY OF DETERMINING THE SUITABILITY OF ANY VTE PRODUCT FOR ITS END USE.

	LTR.	REVISI□NS			DATE	INT.
I	\triangle	UPDATED	MATERIAL	INFORMATION	8-02-22	RAS

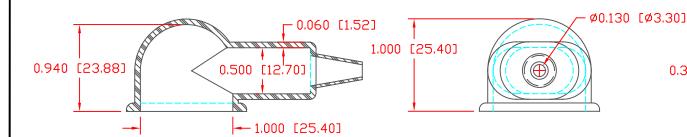


SECTION A-A

TYP. WALL THICKNESS = .060" [1.5]



SEAL DETAILS
SEAL THICKNESS = .030" [.8]
SEAL TOLERANCE: +.030/-.010 [+.8/-.25]
WIRE GAGES: 18 - 10

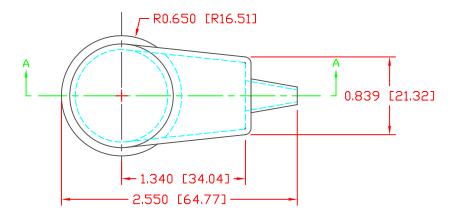

VTE PART ND:
MATERIAL:
VENDOR PART ND:
SHORE DUROMETER:
SPECIFIC GRAVITY:
ULT. ELONGATION %:
MELTING TEMP:
BRITTLE TEMP:
TENSILE STRENGTH PSI:
DIELECTRIC STRENGTH, V,/mil
U.L. RATING:

1101650114 PVC 9812-65-BLACK "A" 10 SEC. 65 1.34 400 315-335 F [157-168 C] -54 F [-48 C] 1550 PSI 453 V2

DO NOT SCALE

SCALE FACTOR: NONE
ALL DIMENSIONS GIVEN AS: in [mm]
TOLORANCES UNLESS OTHERWISE SPECIFIED:
MOLDED PARTS: ±.030" (±0.8mm)
ALL ANGLES ARE ± 1 DEGREE



VTE Incorporated
5437 Robinson Road, P.D. Box 790
Pellston, Michigan 49769
Telephone: 1-800-527-9256, 231-539-8000

 REF:
 DATE:
 DRN BY:
 BRH
 WEIGHT:

 CUSTOMER DIMS
 02-14-05
 CHK'D BY:
 BRH
 .019 LBS [8.48 g]

TITLE: EYELET TERMINAL INSULATOR

MATERIAL: PVC PART ND.

COLOR: BLACK DRG CLASS REV A

405N1V14