



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED. VTE MAKES NO WARRANTY, EXPRESSED OR IMPLIED, AS TO THE SUITABILITY OF A PRODUCT FOR ANY INTENDED USE. THE CUSTOMER SHALL BEAR THE SOLE RESPONSIBILITY OF DETERMINING THE SUITABILITY OF ANY VTE PRODUCT FOR ITS END USE.

	LTR.	REVISI□NS	DATE	INT.
I	\supset	REDRAWN AND UPDATED FROM 9/20/99	5-20-22	RAS



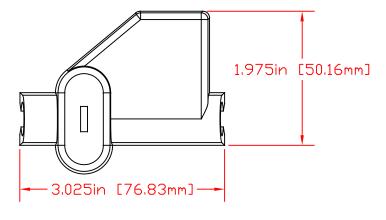

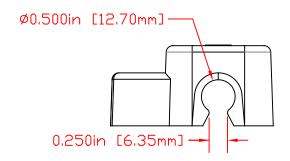

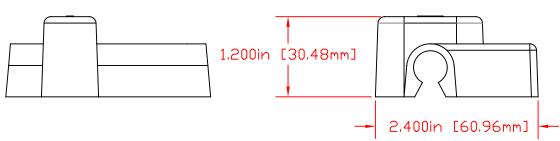

MATERIAL PART ND:
MATERIAL:
VENDOR PART ND:
SHORE DUROMETER:
SPECIFIC GRAVITY:
ULT. ELDNGATION %:
MELTING TEMP:
TENSILE STRENGTH PSI:
DIELECTRIC STRENGTH, V./mil
U.L. RATING:

1101950114 PVC 9812-95-BLACK "A" 10 SEC. 95 1.5 200 345-365 F [174-185 C] 2100 384 SCALE FACTOR : NONE
ALL DIMENSIONS GIVEN AS: in [mm]
TOLORANCES UNLESS OTHERWISE SPECIFIED :
MOLDED PARTS: ±.030" [±0.8mm]
ALL ANGLES ARE ± 1 DEGREE



VTE Incorporated 5437 Robinson Road, P.D. Box 790 Pellston, Michigan 49769 Telephone 1 1000 F37 0356, 231 530 00

Telephone: 1-800-527-9256, 231-539-8000 FAX: 231-539-0914

MATERIAL: PVC PART ND.

COLOR: BLACK DRG CLASS REV A

453D9V14