

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED.VTE MAKES NO WARRANTY, EXPRESSED OR IMPLIED, AS TO THE SUITABILITY OF A PRODUCT FOR ANY INTENDED USE. THE CUSTOMER SHALL BEAR THE SDLE RESPONSIBILITY OF DETERMINING THE SUITABILITY OF ANY VTE PRODUCT FOR ITS END USE.

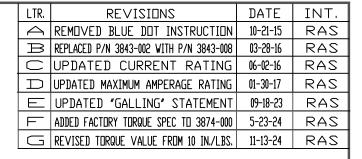

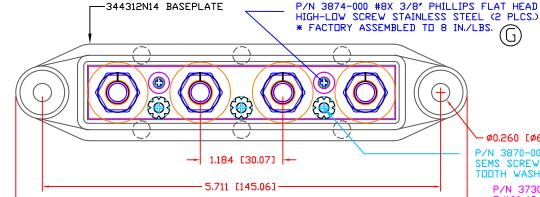

- 6.59 [167.41] -

- Ø0.260 [Ø6.60]

P/N 3870-000 #8-32 x 5/16" SEMS SCREW W/ EXTERNAL TOOTH WASHER (3 PLCS)

> P/N 3730-000 5/16"-18 UNC X 1.25" FULLY THREADED STAINLESS STEEL BOLT (4 PLCS)

P/N 3843-008 5/16"-18 HEAVY HEX NUT STAINLESS STEEL (4 PLCS)

P/N 3642-000 STAINLESS STEEL SPRING WASHER (4 PLCS)

> P/N 3645-000 18-8 STAINLESS STEEL FLAT WASHER (4 PLCS)

P/N 3885-001 5/16" CONTACT PLATE

SCALE FACTOR : NONE ALL DIMENSIONS GIVEN AS: in [mm] TOLERANCES UNLESS OTHERWISE SPECIFIED : MOLDED PARTS: ±.030" [±0.8mm] HARDWARE ITEMS: ±.010" [±0.25mm]

DATE:

06-03-10

MATERIAL PART NO: MATERIAL: VENDOR PART NO: SPECIFIC GRAVITY: MELTING TEMP: U.L. RATING:

1.775 [45.09]

1111210514UL GLASS FILLED NYLON HYLON N2015 HL BK 1.23 515 F [268 C] UL 94 HB

12 FT./LBS. (144 IN./LBS.) MAXIMUM RECOMMENDED FASTENER TORQUE: (IF WARRANTED, DIELECTRIC GREASE CAN BE USED TO PREVENT GALLING) 250 AMPS @ 12VDC MAXIMUM RECOMMENDED AMPERAGE:

COLOR: BLACK

REF:

CUSTOMER DIMS

CLASS REV G DRG

74312N0N14

VTE Incorporated 5437 Robinson Road, P.D. Box 790

<del>--</del> 1.385 [35.19] -

DRN BY:

CHK'D BY:

Pellston, Michigan 49769 Telephone: 1-800-527-9256, 231-539-8000 FAX: 231-539-0914

BRH

WEIGHT:

TITLE: BUSBAR, 4 PDINT, 5/16" SCALE: PART NO. MATERIAL: GLASS-FILLED NYLON