
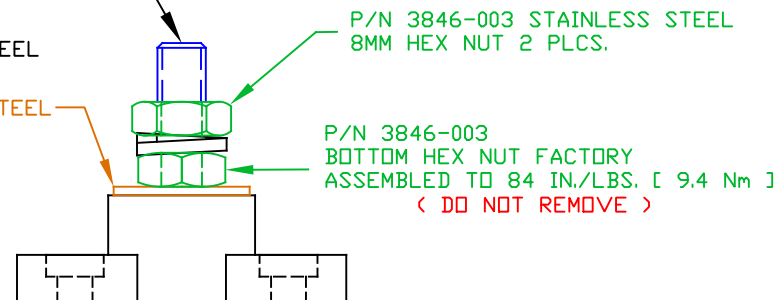
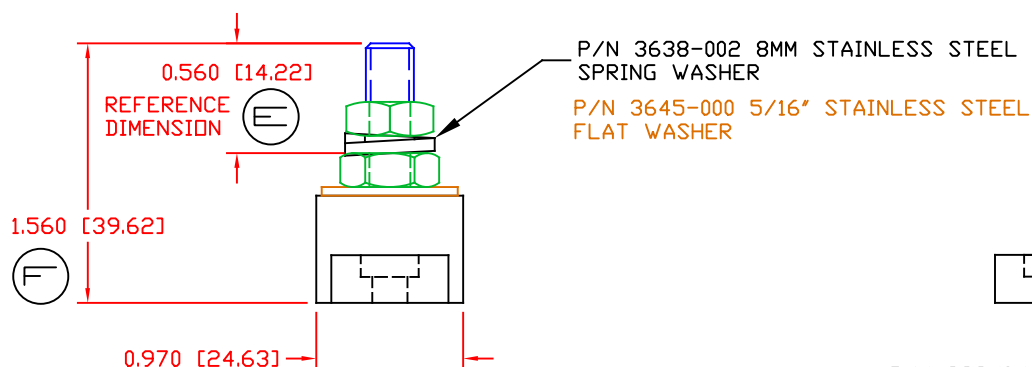


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED. VTE MAKES NO WARRANTY, EXPRESSED OR IMPLIED, AS TO THE SUITABILITY OF A PRODUCT FOR ANY INTENDED USE. THE CUSTOMER SHALL BEAR THE SOLE RESPONSIBILITY OF DETERMINING THE SUITABILITY OF ANY VTE PRODUCT FOR ITS END USE.

LTR.	REVISIONS	DATE	INT.
A	ADDED CURRENT RATING	9-19-18	RAS
B	REPLACED CURRENT LIMITS WITH TEMPERATURE LIMIT	10-12-18	RAS
C	UPDATED MOUNTING DIMENSIONS	11-09-21	RAS
D	UPDATED OVERALL HEIGHT DIENSDION FROM 1.547 [24.63]	1-4-23	RAS
E	0.560 [14.22] WAS 0.953 [24.20]	2-17-23	RAS
F	1.560 [39.62] WAS 1.940 [49.27]	2-17-23	RAS

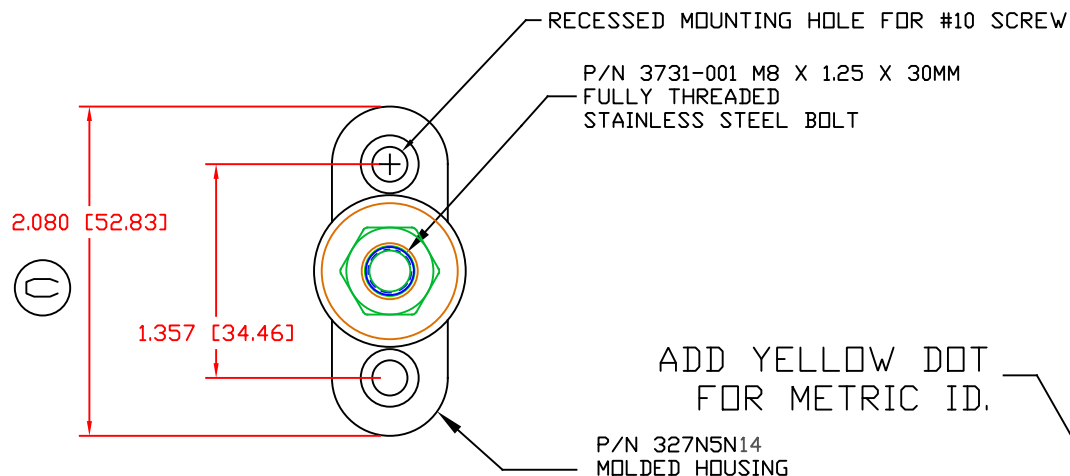

P/N 329N0N14 CAVITY PLUG (NOT SHOWN)

SCALE FACTOR : NONE
ALL DIMENSIONS GIVEN AS: in [mm]
TOLERANCES UNLESS OTHERWISE SPECIFIED :
MOLDED PARTS: $\pm 0.030"$ [$\pm 0.8\text{mm}$]
HARDWARE ITEMS: $\pm 0.010"$ [$\pm 0.25\text{mm}$]

MATERIAL PART NO:
MATERIAL:
VENDOR PART NO:
SPECIFIC GRAVITY:
MELTING TEMP:
U.L. RATING:
MAXIMUM RECOMMENDED TORQUE:

1111210514UL
GLASS FILLED NYLON
HYLON N2015 HL BK
1.23
515 F [268 C]
UL 94 HB
96 IN./LBS.
(10.8 Nm)

(B) OVERALL ASSEMBLY TEMPERATURE NOT TO EXCEED 140 DEGREES F
(60 DEGREES C)

		VTE Incorporated 5437 Robinson Road, P.O. Box 790 Pellston, Michigan 49769 Telephone: 1-800-527-9256, 231-539-8000 FAX: 231-539-0914	
REF:	DATE:	DRN BY: RAS	WEIGHT:
CUSTOMER DIMS	7-17-17	CHK'D BY: PJK	
TITLE: 8MM SMALL JUNCTION STUD			
MATERIAL: GLASS FILLED NYLON		PART NO.	
COLOR: BLACK		77008N14	
DRG CLASS	REV F		