THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED.VTE MAKES NO WARRANTY, EXPRESSED OR IMPLIED, AS TO THE SUITABILITY OF A PRODUCT FOR ANY INTENDED USE. THE CUSTOMER SHALL BEAR THE SOLE RESPONSIBILITY OF DETERMINING THE SUITABILITY OF ANY VTE PRODUCT FOR ITS END USE.

LTR.	REVISIONS	DATE	INT.
A	3740-006 WAS 3740-001	11-15-05	BRH
B	333N0 WAS 329N0, REM. 3740-006, 3740-007, ADDED 3740-008 AND 3844-002	03-08-06	BRH
C	REPLACED P/N 3844-002 WITH P/N 3844-009	03-18-16	RAS
D	PN 333N0V02 TO 330N0N02	03-24-17	JMM
E	ADDED ADDITIONAL INFORMATION FOR PROPER USE	02-16-18	RAS
F	ADDED FACTORY TORQUE SPEC TO 3740-008	07-09-24	RAS

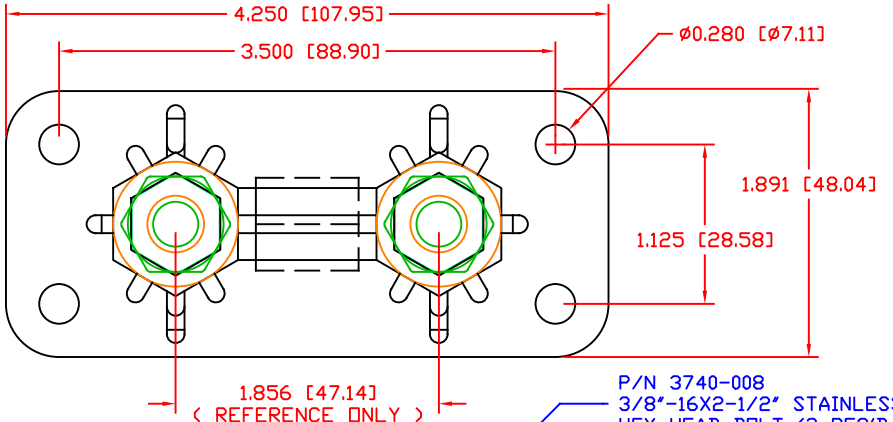

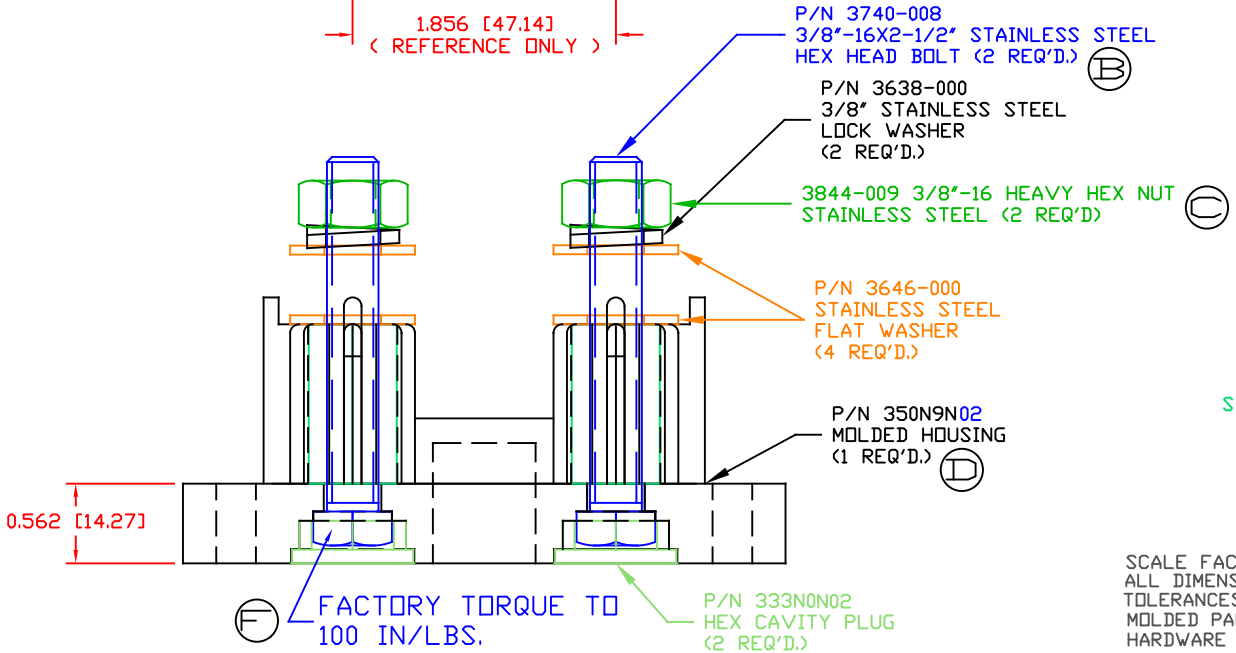

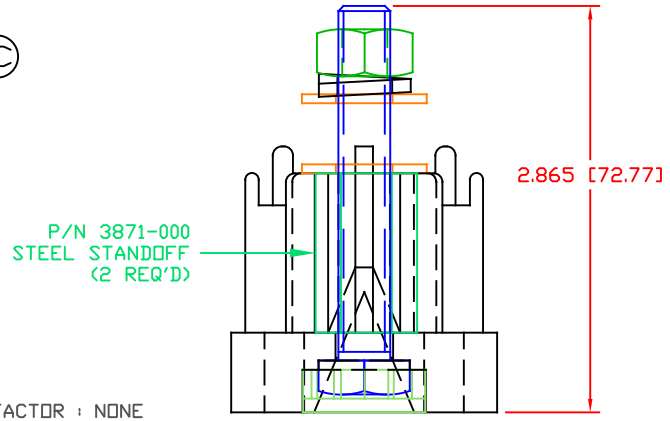

SCALE FACTOR : NONE
ALL DIMENSIONS GIVEN AS: in [mm]
TOLERANCES UNLESS OTHERWISE SPECIFIED :
MOLDED PARTS: ±.030" [±0.8mm]
HARDWARE ITEMS: ±.010" [±0.25mm]

E MAXIMUM AMPERAGE: 400 AMPS @ 12VDC
MAXIMUM VOLTAGE: 48VDC

MAXIMUM RECOMMENDED FASTENER TORQUE:
STAINLESS HEAVY HEX NUT: 180 IN./LBS. [20.3 Nm]

MATERIAL PART NO:	7111210502
MATERIAL:	GLASS FILLED NYLON
VENDOR PART NO:	HYLON N2015 HL NAT
SPECIFIC GRAVITY:	1.23
MELTING TEMP:	515 F [268 C]
U.L. RATING:	UL 94 HB

VTE Incorporated
5437 Robinson Road, P.O. Box 790
Pellston, Michigan 49769
Telephone: 1-800-527-9256, 231-539-8000
FAX: 231-539-0914

REF: TFB SERIES	DATE: 06-14-05	DRN BY: BRH CHK'D BY: BRH	WEIGHT: .57 Lbs. [258.7 g]
TITLE: "T" CLASS FUSEHOLDER ASSY.			SCALE: NONE
MATERIAL: GLASS FILLED NYLON			PART NO. TFB735N0N02
COLOR: RED	DRG CLASS REV F		