

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED, ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED. VTE MAKES NO WARRANTY, EXPRESSED OR IMPLIED, AS TO THE SUITABILITY OF A PRODUCT FOR ANY INTENDED USE. THE CUSTOMER SHALL BEAR THE SDLE RESPONSIBILITY OF DETERMINING THE SUITABILITY OF ANY VTE PRODUCT FOR ITS END USE.

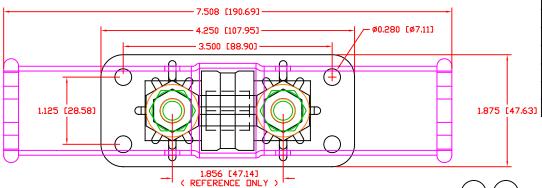

	LTR.	REVISIONS	DATE	INT.
	7	3740-006 VAS 3740-001	11-15-05	BRH
	М	333NO VAS 329NO, REN. 3740-006, 3740-007, ADDED 3740-008 AND 3844-002	3-08-06	BRH
	()	351N8P00 WAS 351N8V00	7-30-15	BRH
	П	REPLACED P/N 3844-002 WITH P/N 3844-009	3-18-16	RAS
	Ш	PN 333N0V** CHANGED TO 333N0N**	3-17-17	RAS
	F	UPDATED COVER INFO	3-17-17	RAS
	U	ADDED ADDITIONAL INFORMATION FOR PROPER USE	2-16-18	RAS
33	$\vdash$	ADDED FACTORY TORQUE SPEC 3740-008	7-09-24	RAS

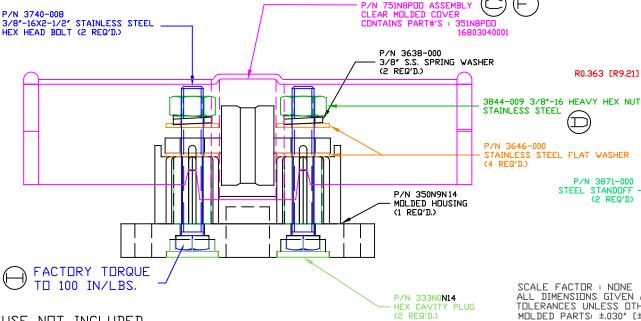

SCALE FACTOR : NONE ALL DIMENSIONS GIVEN AS: in [mm] TOLERANCES UNLESS OTHERWISE SPECIFIED : MOLDED PARTS: ±.030" [±0.8mm] HARDWARE ITEMS: ±.010" [±0.25mm]

R0.363 [R9.21] -

P/N 3871-000 STEEL STANDOFF

(2 REQ'D)

FUSE NOT INCLUDED SHOWN FOR ILLUSTRATIVE PURPOSES ONLY MAXIMUM AMPERAGE: 400 AMPS @ 12VDC MAXIMUM VOLTAGE: 48VDC

MAXIMUM RECOMMENDED FASTENER TORQUE: STAINLESS HEAVY HEX NUT: 180 IN./LBS. [20.3 Nm]

MATERIAL PART NO: MATERIAL: VENDOR PART NO: SPECIFIC GRAVITY: MELTING TEMP: U.L. RATING:

1111210514UL GLASS FILLED NYLON HYLON N2015 HL BK [268 C] ŪL 94 HB



## VTE Incorporated

5437 Robinson Road, P.D. Box 790 Pellston, Michigan 49769 Telephone: 1-800-527-9256, 231-539-8000 FAX: 231-539-0914

3.105 [78.85]

REF: DATE: DRN BY: BRH WEIGHT: 6-14-05 CHK'D BY: BRH

PART NO.

TITLE: "T" CLASS FUSEHOLDER ASSY. SCALE:

MATERIAL: GLASS FILLED NYLON

COLOR: BLACK

CLASS REV H

TFB735N8N14