

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED.VTE MAKES NO WARRANTY, EXPRESSED OR IMPLIED, AS TO THE SUITABILITY OF A PRODUCT FOR ANY INTENDED USE. THE CUSTOMER SHALL BEAR THE SOLE RESPONSIBILITY OF DETERMINING THE SUITABILITY OF ANY VTE PRODUCT FOR ITS END USE.

LTR.	REVISIONS	DATE	INT.
A	3874-000 WAS 3872, 3873-001 WAS 3873	10-03-16	BRH
B	ADDED SUB ASSEMBLY P/N 73873-001	10-11-06	BRH
C	3842-001 ADDED 1 PLC, 3842-002 REMOVED 1 PLC.	04-20-07	BRH
D	3842-003 WAS 3842-002	08-22-07	BRH
E	COVER 312N9P02 WAS 313N0V00	10-02-08	BRH
F	ADDED TORQUE SPECIFICATION	01-21-14	BRH
G	REMOVED SUB-ASSEMBLY NOTE P/N 73873	02-04-16	RAS
H	UPDATED TORQUE SPEC	08-09-16	MDL
I	3842-006 WAS 3842-003	03-24-17	JMM
J	3637-000 WAS 3637, 3870-000 WAS 3870	03-30-17	JMM
K	3842-B01 WAS 3842-001	06-14-17	JMM
L	ADDED FACTORY TORQUE SPEC TO 3874-000	5-23-24	RAS
M	REVISED TORQUE SPEC FROM 10 IN./LBS.	11-13-24	RAS
N	UPDATED PART # 3842-006 WITH 3842-008	04-21-26	RAS

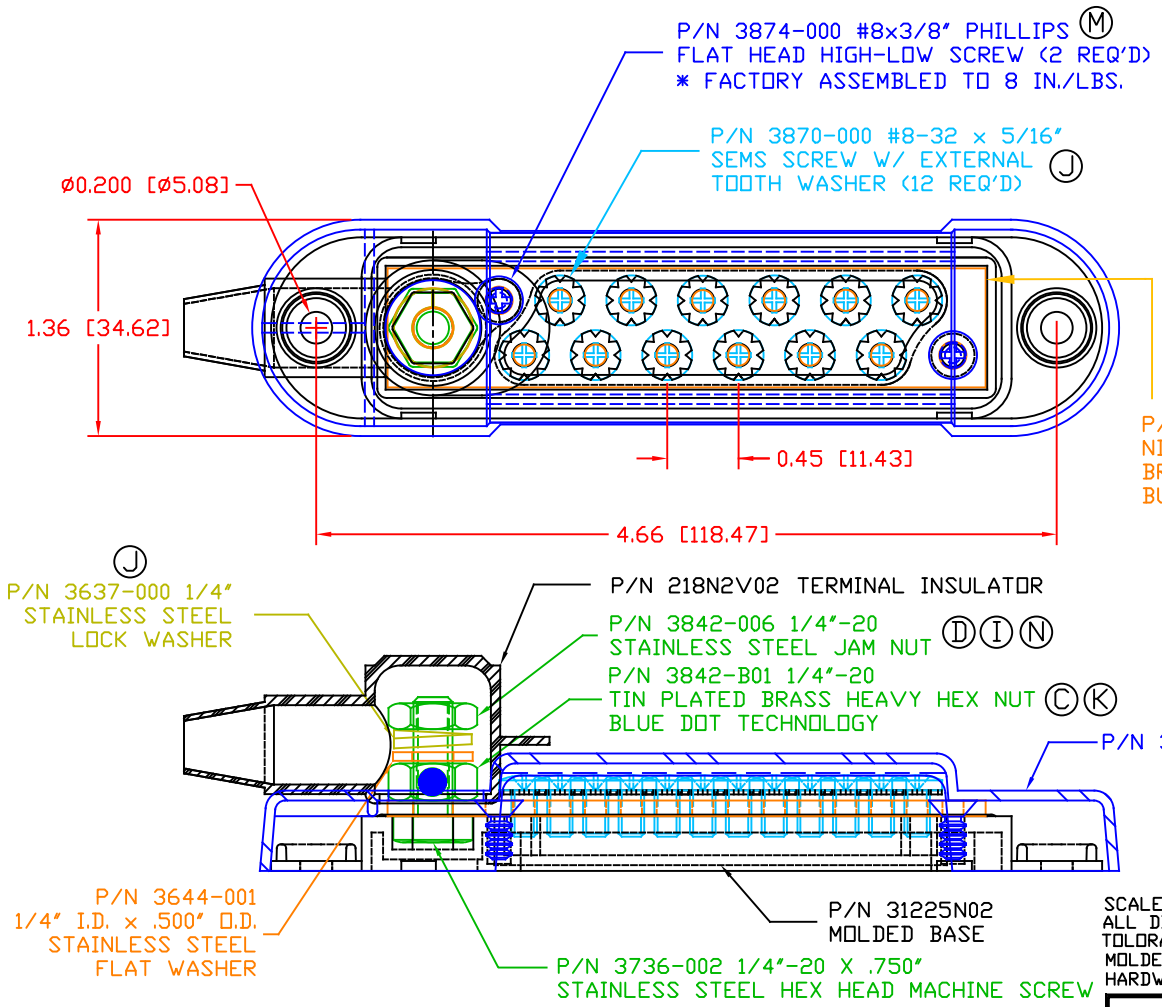

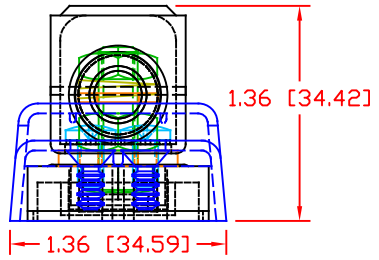

SCALE FACTOR : NONE
ALL DIMENSIONS GIVEN AS: in [mm]
TOLERANCES UNLESS OTHERWISE SPECIFIED :
MOLDED PARTS: ±.030" [±0.8mm]
HARDWARE ITEMS: ±.010" [±0.25mm]

MATERIAL PART NO:	7111210502
MATERIAL:	GLASS FILLED NYLON
VENDOR PART NO:	HYLON N2015 HL NAT
SPECIFIC GRAVITY:	1.23
MELTING TEMP:	515 F [268 C]
U.L. RATING:	UL 94 HB

INCLUDES P-16808110001 BLUE DOT MULTI LABEL, 1 PER CONTAINER

TESTED AT 240 AMPS @ 12VDC FOR 30 MINUTES, MAXIMUM
TEMPERATURE RISE WAS 7.8 DEG. C. MAXIMUM
TEMPERATURE RECORDED WAS 30.6 DEG. C.

VTE Incorporated
5437 Robinson Road, P.O. Box 790
Pellston, Michigan 49769
Telephone: 1-800-527-9256, 231-539-8000
FAX: 231-539-0914

REF: CUSTOMER DIMS	DATE: 08-22-05	DRN BY: BRH CHK'D BY: BRH	WEIGHT:
TITLE: 12-POINT TERMINAL STRIP			SCALE:
MATERIAL: GLASS-FILLED NYLON		PART NO. 71225N02	
COLOR: RED	DRG CLASS REV N		