


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED. VTE MAKES NO WARRANTY, EXPRESSED OR IMPLIED, AS TO THE SUITABILITY OF A PRODUCT FOR ANY INTENDED USE. THE CUSTOMER SHALL BEAR THE SOLE RESPONSIBILITY OF DETERMINING THE SUITABILITY OF ANY VTE PRODUCT FOR ITS END USE.

LTR.	REVISIONS	DATE	INT.
A	ADDED METRIC IDENTIFICATION METHOD	05APR11	BRH
B	REMOVED BLUE DOT INSTRUCTION	21OCT15	RAS
C	UPDATED DIMENSIONS AND DESCRIPTIONS	02FEB16	RAS
D	UPDATED CURRENT RATING	02JUN16	RAS
E	UPDATED MAXIMUM AMPERAGE RATING	30JAN17	RAS
F	ADDED FACTORY TORQUE SPEC TO 3874-000	5-23-24	RAS
G	REVISED TORQUE SPEC FROM 10 IN./LBS.	11-13-24	RAS

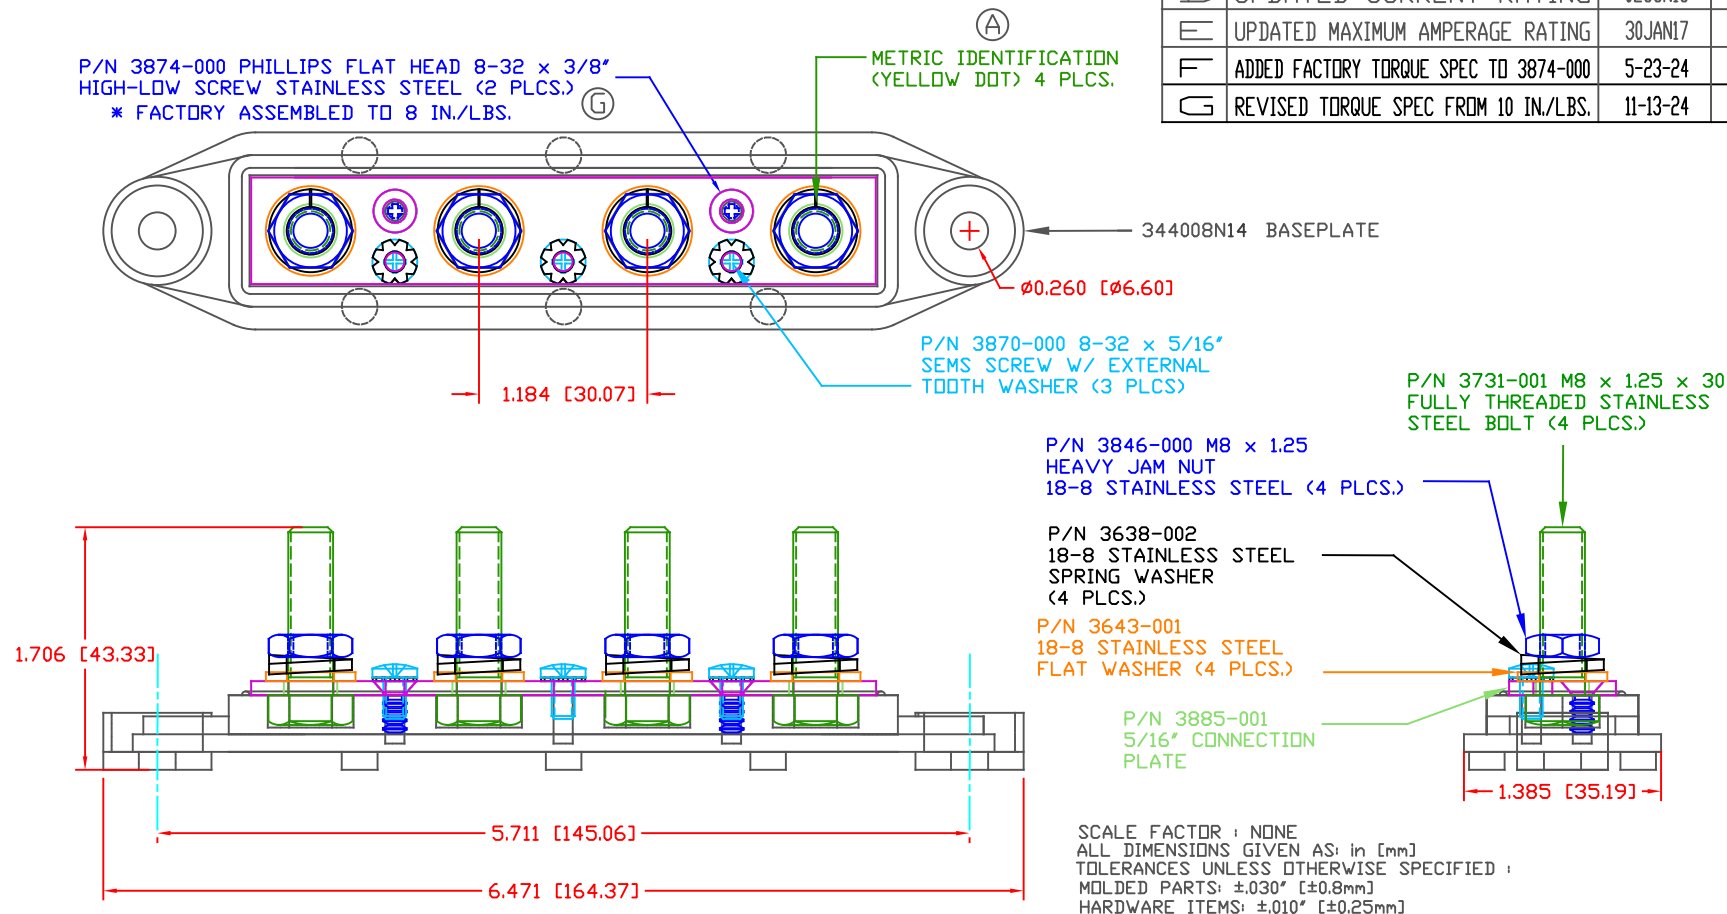

MATERIAL PART NO:
MATERIAL:
VENDOR PART NO:
SPECIFIC GRAVITY:
MELTING TEMP:
U.L. RATING:

111210514UL
GLASS FILLED NYLON
NYLON N2015 HL BK
1.23
515 F [268 C]
UL 94 HB

MAXIMUM RECOMMENDED FASTENER TORQUE: (144 IN./LBS.) [16.2 Nm]
(ANTI-SEIZE RECOMMENDED)

MAXIMUM RECOMMENDED AMPERAGE: 250 AMPS @ 12VDC

		VTE Incorporated	
		5437 Robinson Road, P.O. Box 790 Pellston, Michigan 49769 Telephone: 1-800-527-9256, 231-539-8000 FAX: 231-539-0914	
REF:	DATE:	DRN BY:	WEIGHT:
CUSTOMER DIMS	06-03-10	CHK'D BY: BRH	
TITLE: BUSBAR, 4 POINT, M8			SCALE: NONE
MATERIAL: GLASS-FILLED NYLON		PART NO.	
COLOR: BLACK		74008N0N14	
DRG CLASS REV G			