


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED. VTE MAKES NO WARRANTY, EXPRESSED OR IMPLIED, AS TO THE SUITABILITY OF A PRODUCT FOR ANY INTENDED USE. THE CUSTOMER SHALL BEAR THE SOLE RESPONSIBILITY OF DETERMINING THE SUITABILITY OF ANY VTE PRODUCT FOR ITS END USE.

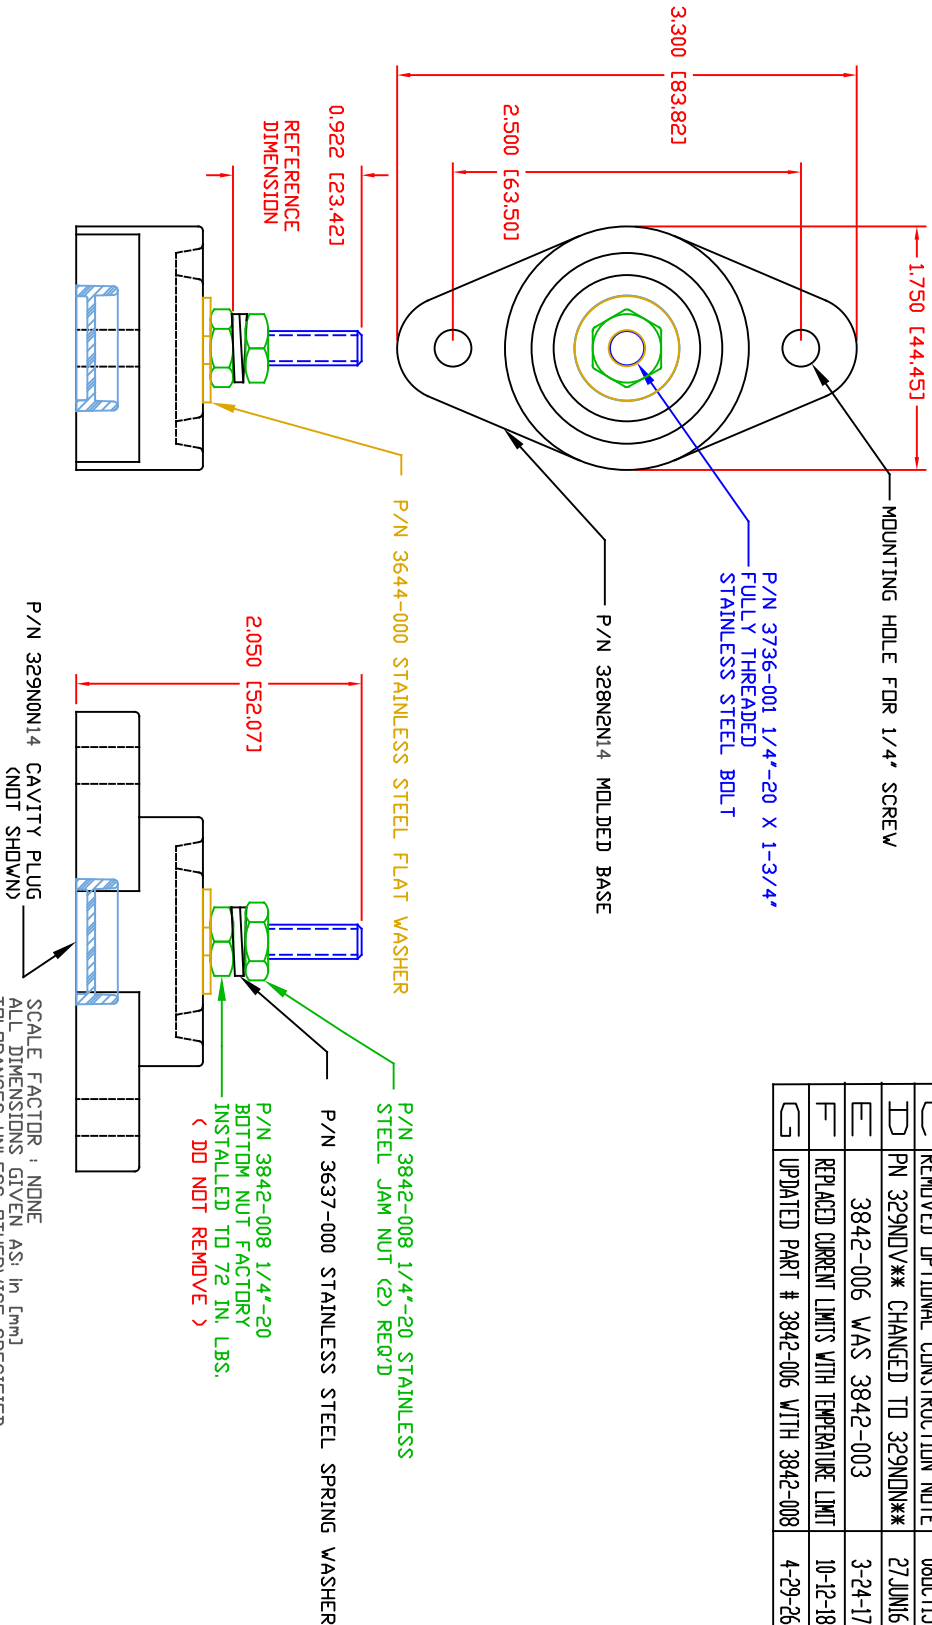


LTR.	REVISIONS	DATE	INT.
A	3842-003 WAS 3842	19MAY05	BRH
B	ADDED OPTIONAL CONSTRUCTION NOTE AND COMPONENT P/N SUFFIXES	05APR06	BRH
C	REMOVED OPTIONAL CONSTRUCTION NOTE	08OCT15	RAS
D	PN 329NDV** CHANGED TO 329NDN**	27JUN16	MDL
E	3842-006 WAS 3842-003	3-24-17	JMM
F	REPLACED CURRENT LIMITS WITH TEMPERATURE LIMIT	10-12-18	RAS
G	UPDATED PART # 3842-006 WITH 3842-008	4-29-26	RAS

MATERIAL PART NO: 111210514UL
MATERIAL: GLASS FILLED NYLON
VENDOR PART NO: HYLON N2015 HL BK
SPECIFIC GRAVITY: 1.23
MELTING TEMP: 515 F [268 C]
UL RATING: UL 94 HB

OVERALL ASSEMBLY TEMPERATURE NOT TO EXCEED 140 DEGREES F
(60 DEGREES C)

MAXIMUM RECOMMENDED TORQUE: 60 IN./LBS.

SCALE FACTOR : NONE
ALL DIMENSIONS GIVEN AS: In [mm]
TOLERANCES UNLESS OTHERWISE SPECIFIED :
MOLDED PARTS: ±0.30" [±0.8mm]
HARDWARE ITEMS: ±.010" [±0.25mm]



VTE Incorporated
5437 Robinson Road, P.O. Box 790
Pelleston, Michigan 49769
Telephone: 1-800-527-9256, 231-539-8000
FAX: 231-539-0914

REF:	DATE:	DRN BY:	BRH	WEIGHT:
CUSTOMER DIMS	4-09-03	CHK'D BY:	BRH	
TITLE:	1/4" POWER DISTRIBUTION POST			
MATERIAL: GLASS FILLED NYLON	PART NO: 77125N14			
COLOR: BLACK	DRG	REV	G	