
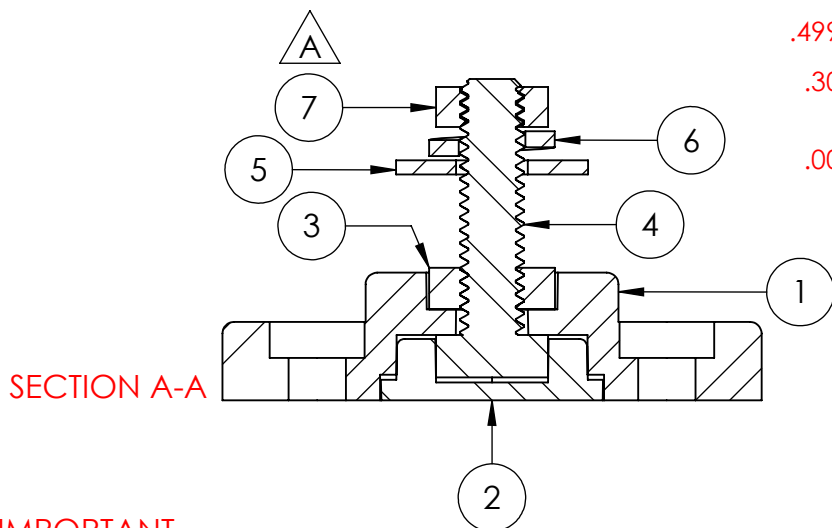


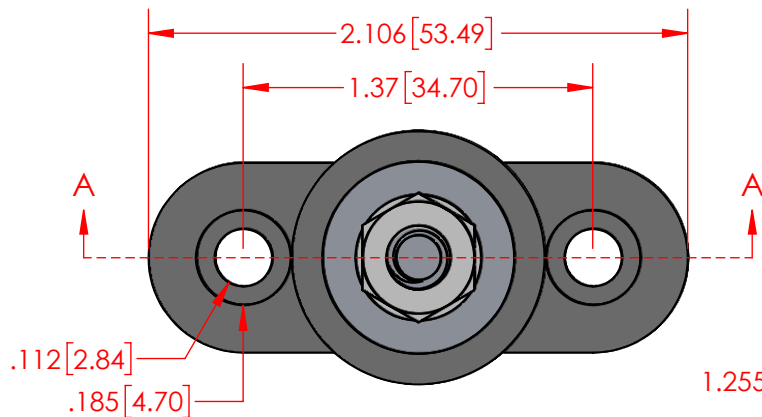

IMPORTANT

Amperage ratings are for reference only.
Current capacity is determined by the cables
used, not the junction post. Current ratings
are related to expected cable capacities.

Current Rating : 15 Amp @ 12VDC
MAXIMUM VOLTAGE : 48 VDC
MATERIAL PART NO: 1111210514UL
MATERIAL: GLASS FILLED NYLON
VENDOR PART NO: HYLON N2015 HL BK
MAX 1/4" FASTENER TORQUE: 60 IN./LBS. [6.77 Nm]

Assembly Weight :
0.07 Lbs. [29.4 g]



ALL DIMENSIONS GIVEN AS : INCH [METRIC]
TOLERANCES UNLESS OTHERWISE SPECIFIED :
MOLDED PRODUCTS : $\pm .030"$ / $\pm 0.8\text{mm}$
HARDWARE PRODUCTS : $\pm .010"$ / $\pm 0.25\text{mm}$

PRINTED COPIES ARE NOT CONTROLLED

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
VTE INCORPORATED. ANY REPRODUCTION
IN PART OR AS A WHOLE WITHOUT THE WRITTEN
PERMISSION OF VTE INCORPORATED PROHIBITED.

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	Updated Part # 3842-006 with 3842-008	4/21/2026	RAS

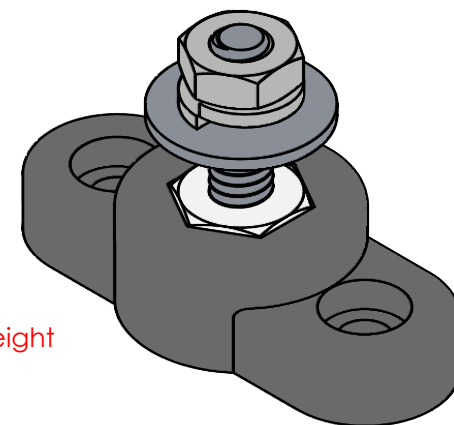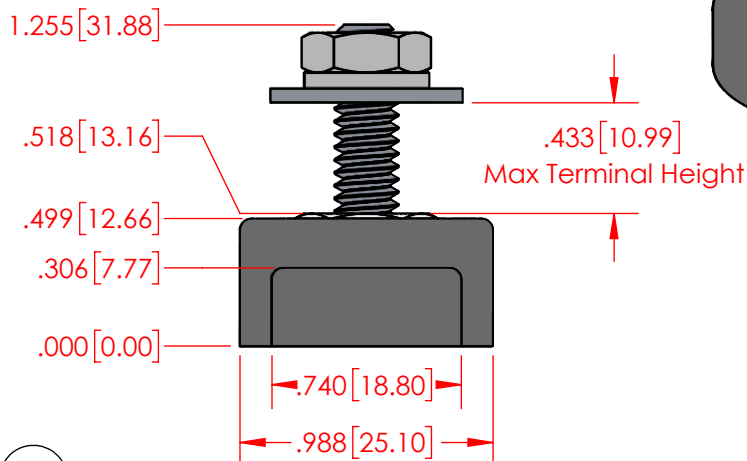

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	320N3N14	Nylon Power Post Base .250in. (Black)	1
2	337N3N14	Nylon Base Plug .250in. (Black)	1
3	3842-006	1/4"-20 316 Stainless Steel Heavy Hex Jam Nut	1
4	3736-003	1/4"-20 18-8 Stainless Steel Bolt 1"	1
5	3644-000	1/4" 18-8 Stainless Steel Flat Washer	1
6	3637-000	1/4" 18-8 Stainless Steel Lock Washer	1
7	3842-008	1/4"-20 316 Stainless Steel Jam Nut	1



VTE INCORPORATED

5437 Robinson Road, P.O. Box 790
Pellston, Michigan 49769 USA
Telephone : 1-800-527-9256, 231-539-8000
Fax : 231-539-0914, EFax : 231-344-5914

REV	A	NAME	RAS	DATE	11-02-23
SIZE	A	DRAWN BY:		CHECKED BY:	
DO NOT SCALE DRAWING					

TITLE: 1/4" Low Profile Power Post

DWG. NO. **77325CN14**