


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED.VTE MAKES NO WARRANTY, EXPRESSED OR IMPLIED, AS TO THE SUITABILITY OF A PRODUCT FOR ANY INTENDED USE. THE CUSTOMER SHALL BEAR THE SOLE RESPONSIBILITY OF DETERMINING THE SUITABILITY OF ANY VTE PRODUCT FOR ITS END USE.

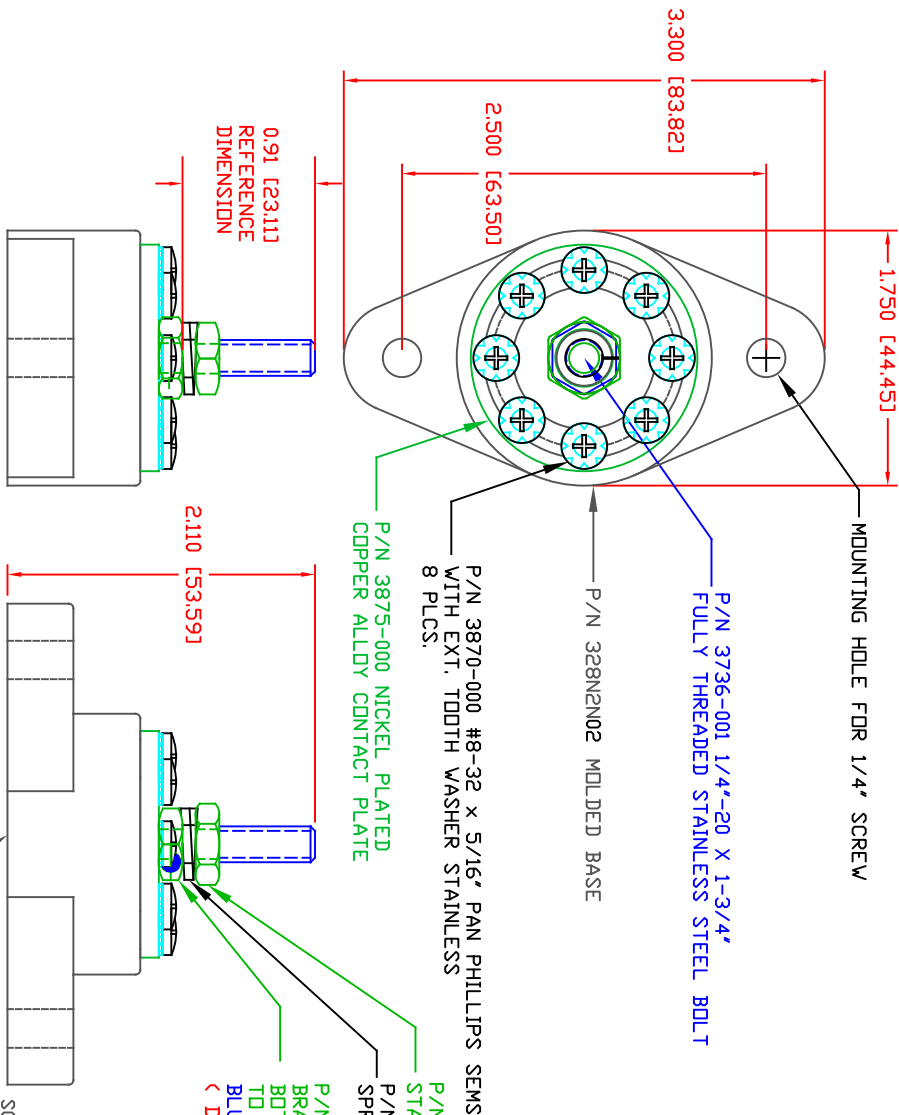

LTR	REVISIONS	DATE	INT.
A	3842-000 WAS 3842	04APR06	BRH
B	ADDED COMPONENT P/N SUFFIXES	04-04-06	BRH
C	3842-003 WAS 3842-000	10-10-06	BRH
D	ADDED SUB ASSEMBLY P/N 378/5	10-11-06	BRH
E	REMOVED SUB-ASSEMBLY NOTE P/N 378/5	02-02-16	RAS
F	PN 329NDV** CHANGED TO PN 329NDN**	06-27-16	MDL
G	3842-006 WAS 3842-003	03-24-17	JMM
H	3842-B01 WAS 3842-001	06-14-17	JMM
I	UPDATED PART # 3842-006 WITH 3842-008	04-21-26	RAS

INCLUDES P-1680811001 BLUE DDT MULTI LABEL, 1 PER CONTAINER
RECOMMENDED MAX TORQUE:
CURRENT RATING:
VOLTAGE RATING:
MATERIAL PART NO:
VENDOR PART NO:
SPECIFIC GRAVITY:
MELTING TEMP:
UL RATING:

1/4"-20 60 IN./LBS.
SCREWS 15 IN./LBS.
160 AMPS @ 12 VDC
48 VDC MAX.
7111210502
GLASS FILLED NYLON
HYLON N2015 HL NAT
123
515 F [268 C]
UL 94 HB

P/N 3842-008 1/4"-20 STAINLESS STEEL JAM NUT
P/N 3637-000 STAINLESS STEEL SPRING LOCK WASHER
P/N 3842-B01 1/4"-20 TIN-PLATED BRASS HEAVY HEX NUT
BOTTOM NUT FACTORY INSTALLED TO 72 IN./LBS.
BLUE DDT TECHNOLOGY
(DO NOT REMOVE)

SCALE FACTOR : NONE
ALL DIMENSIONS GIVEN AS: in [mm]
TOLERANCES UNLESS OTHERWISE SPECIFIED :
MOLDED PARTS: ±.030" [±0.8mm]
HARDWARE ITEMS: ±.010" [±0.25mm]

VTE Incorporated
5437 Robinson Road, P.O. Box 790
Pellston, Michigan 49769
Telephone: 1-800-527-9256, 231-539-8000
FAX: 231-539-0914

REF.	DATE	DRN BY	BRH	WEIGHT
CUSTOMER DIMS	04-09-03	CHK'D BY	BRH	
TITLE:	1/4" POWER DISTRIBUTION POST			SCALE: NONE
MATERIAL:	GLASS-FILLED NYLON	PART NO.		
COLOR:	RED	DRG CLASS	REV 1	77825N02