


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED. VTE MAKES NO WARRANTY, EXPRESSED OR IMPLIED, AS TO THE SUITABILITY OF A PRODUCT FOR ANY INTENDED USE. THE CUSTOMER SHALL BEAR THE SOLE RESPONSIBILITY OF DETERMINING THE SUITABILITY OF ANY VTE PRODUCT FOR ITS END USE. PROPRIETARY RIGHTS ARE CLAIMED FOR THE MATERIAL DISCLOSED IN THIS DRAWING.


REVISONS		DATE	INT.
	UPDATED MATERIAL INFORMATION	8-02-22	RAS



TYP. WALL THICKNESS = 1.5

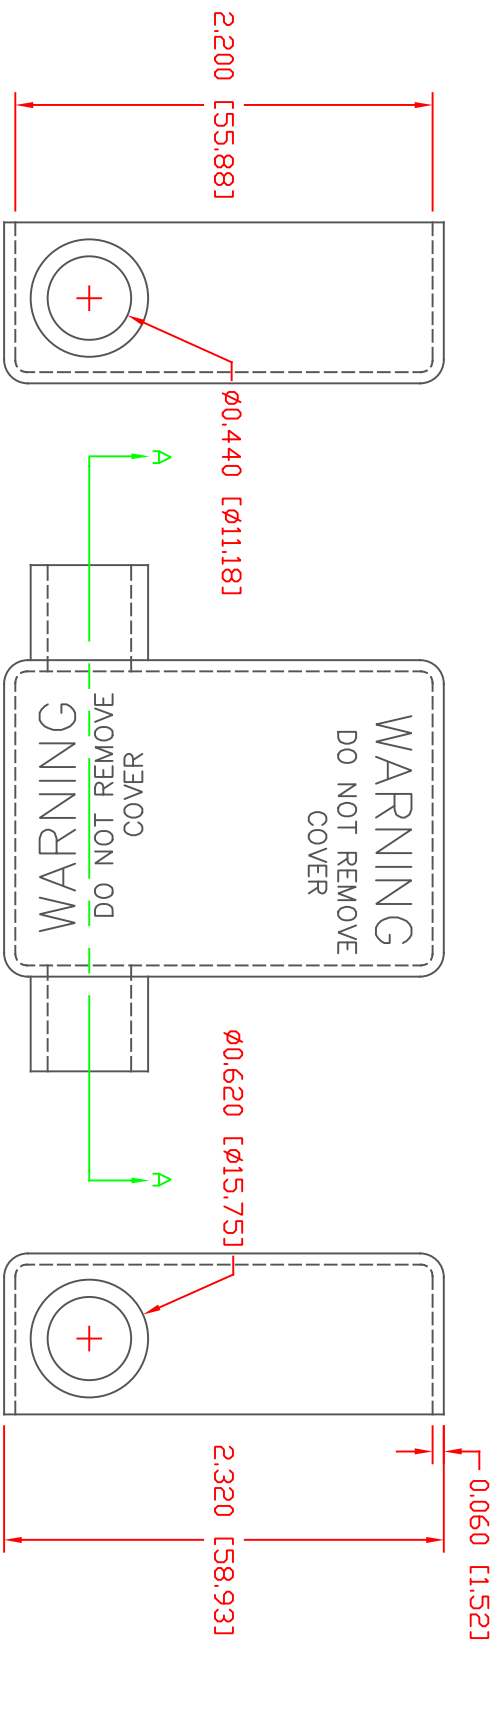


SECTION A-A

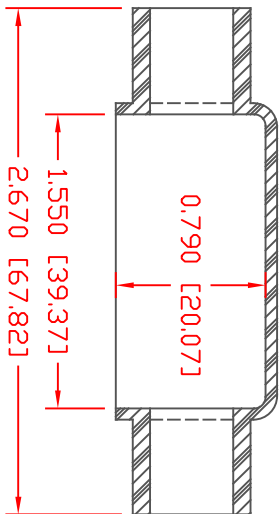

MATERIAL PART NO:
MATERIAL:
VENDOR PART NO:
SHORE DUREMETER:
SPECIFIC GRAVITY:
ULT. ELONGATION %:
MELTING TEMP:
BRITTLE TEMP:
Tensile Strength PSI:
Dielectric Strength, v./mil
U.L. Rating:

1101650114
PVC
9812-65-BLACK
"A" 10 SEC. 65
1.34
400
315-335 F [157-168 C]
-54 F [-48 C]
1550 PSI
453
V2

TOLERANCE UNLESS OTHERWISE SPECIFIED: ±0.30"/±0.8mm
RADIAL DIAMETERS TO BE MEASURED OVER MANDRELS,
RING GAGES OR PIN GAGES OF SUITABLE SIZE



VTE Incorporated
5437 Robinson Road, P.O. Box 790
Pellston, Michigan 49769
Telephone: 1-800-527-9256, 231-539-8000
FAX: 231-539-0914

REF:	DATE:	4-14-98	DRN BY:	JC	WEIGHT:	17.8 grams
TITLE:	BATTERY CABLE BOOT					
MATERIAL:	PVC	PART NO.	DUAL ENTRY			
COLOR: BLACK	DRG CLASS	REV A	843D8V14			