



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED. VTE MAKES NO WARRANTY, EXPRESSED OR IMPLIED, AS TO THE SUITABILITY OF A PRODUCT FOR ANY INTENDED USE. THE CUSTOMER SHALL BEAR THE SOLE RESPONSIBILITY OF DETERMINING THE SUITABILITY OF ANY VTE PRODUCT FOR ITS END USE. PROPRIETARY RIGHTS ARE CLAIMED FOR THE MATERIAL DISCLOSED IN THIS DRAWING.

LTR	REVISIONS	DATE	INT.
Δ	UPDATED MATERIAL INFORMATION	8-02-22	RAS

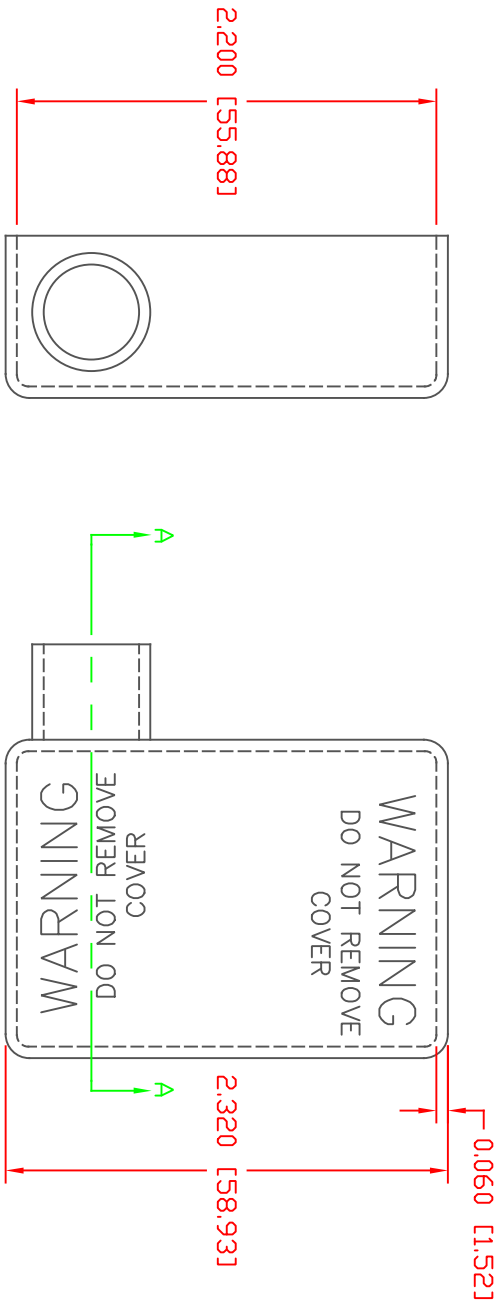

TYP. WALL THICKNESS = 1.5

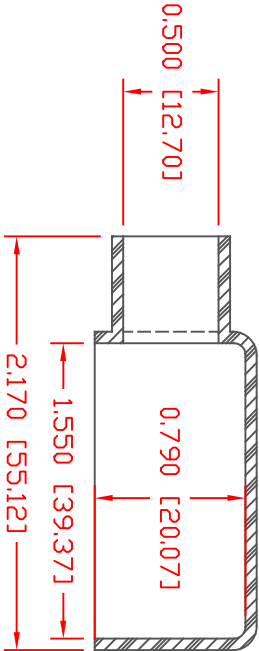


SECTION A-A



VTE Material Part No:
Material:
Material Part No
Max. Operating Temp:
Shore Durometer
Specific Gravity:
Ult. Elongation %:
Brittle Temp:
Tensile Strength PSI:
U.L. Rating:
MEETS:

1101650102
RED PVC
9812-65-RED683
105 C
1/4" 10 SEC. 67/62
1.34
475
-44 C
1547 PSI
94 V/2
FMVSS.302

TOLERANCE UNLESS OTHERWISE SPECIFIED: ±.030"/±0.8mm
RADIAL DIAMETERS TO BE MEASURED OVER MANDRELS,
RING GAGES OR PIN GAGES OF SUITABLE SIZE



VTE Incorporated
5437 Robinson Road, P.O. Box 790
Pellston, Michigan 49769
Telephone: 1-800-527-9256, 231-539-8000
FAX: 231-539-0914

REF:	DATE:	DRN BY:	JC	WEIGHT:
	4-14-98	CHK'D BY:		.041 LBS. / 18.5 G.
TITLE: BATTERY CABLE BOOT				
MATERIAL: PVC		PART NO. LEFT HAND		
COLOR: RED	DRG CLASS	REV A	843L9V02	