



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED. VTE MAKES NO WARRANTY, EXPRESSED OR IMPLIED, AS TO THE SUITABILITY OF A PRODUCT FOR ANY INTENDED USE. THE CUSTOMER SHALL BEAR THE SOLE RESPONSIBILITY OF DETERMINING THE SUITABILITY OF ANY VTE PRODUCT FOR ITS END USE. PROPRIETARY RIGHTS ARE CLAIMED FOR THE MATERIAL DISCLOSED IN THIS DRAWING.

| LTR. | REVISIONS                    | DATE    | INT. |
|------|------------------------------|---------|------|
|      | UPDATED MATERIAL INFORMATION | 8-02-22 | RAS  |

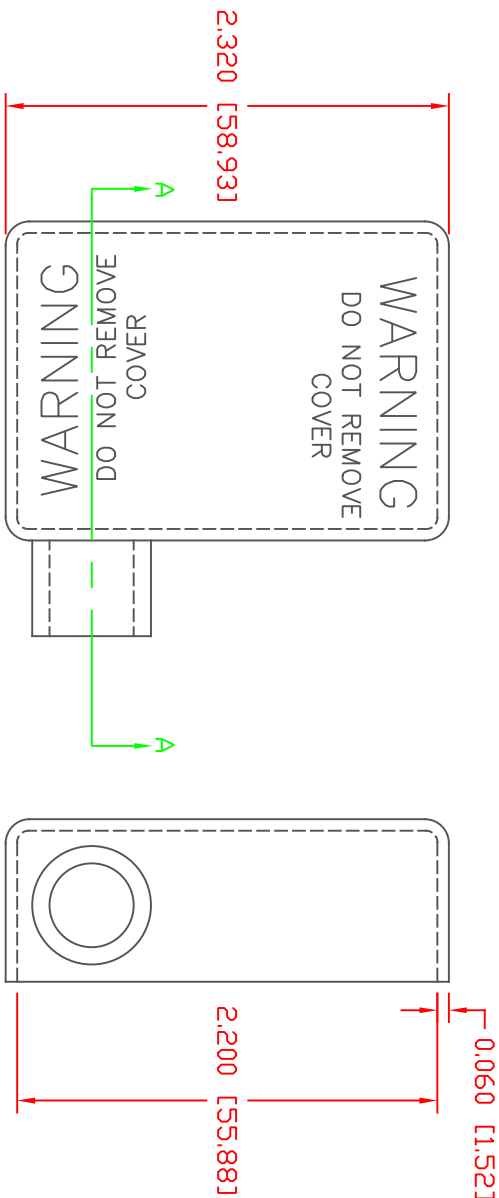

TYP. WALL THICKNESS = 1.5

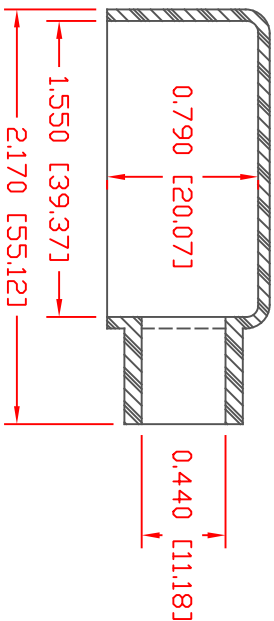

VTE Material Part No: 1101650114  
Material: BLACK PVC  
Material Part No: 9812-65  
Max. Operating Temp: 105 C  
Shore Durometer: 4A, 10 SEC. 67/63  
Specific Gravity: 1.33  
Ult. Elongation %: 520  
Brittle Temp: -36 C  
Tensile Strength PSI: 1563 PSI  
UL Rating: 94 V2  
MEETS: FMVSS.302

TOLERANCE UNLESS OTHERWISE SPECIFIED: ±.030"/±0.8mm  
RADIAL DIAMETERS TO BE MEASURED OVER MANDRELS,  
RING GAGES OR PIN GAGES OF SUITABLE SIZE



VTE Incorporated  
5437 Robinson Road, P.O. Box 790  
Pellston, Michigan 49769  
Telephone: 1-800-527-9256, 231-539-8000  
FAX: 231-539-0914

| REF.                      | DATE    | DRN BY              | JC | WEIGHT     |
|---------------------------|---------|---------------------|----|------------|
|                           | 4-14-98 | CHK'D BY            |    | 17.8 grams |
| TITLE: BATTERY CABLE BOOT |         |                     |    |            |
| MATERIAL: PVC             |         | PART NO. RIGHT HAND |    |            |
| COLOR: BLACK              |         | 843R8V14            |    |            |
| DRG CLASS                 |         | REV A               |    |            |