

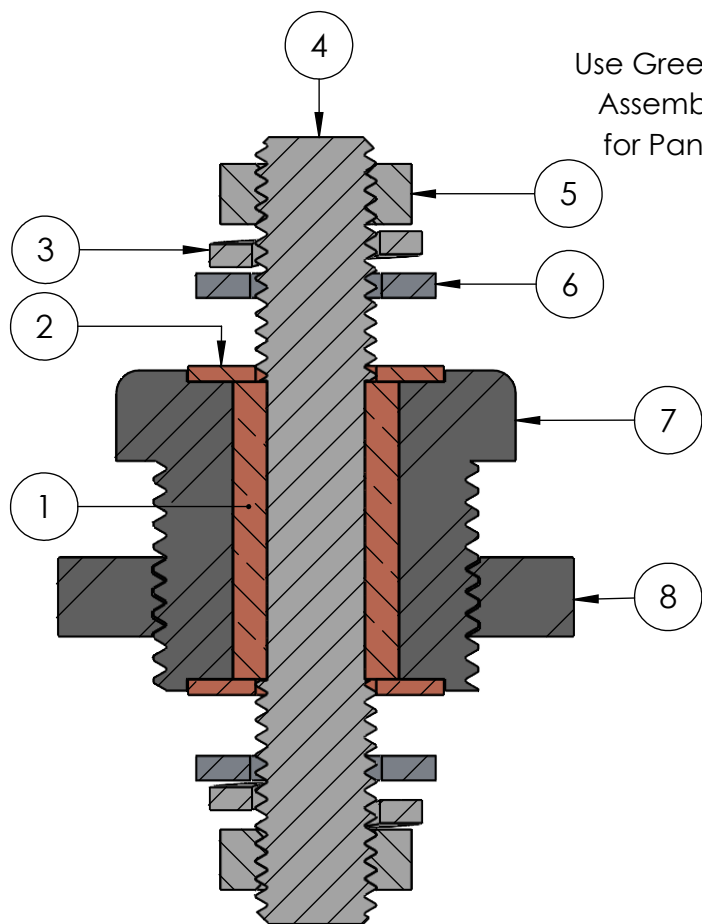
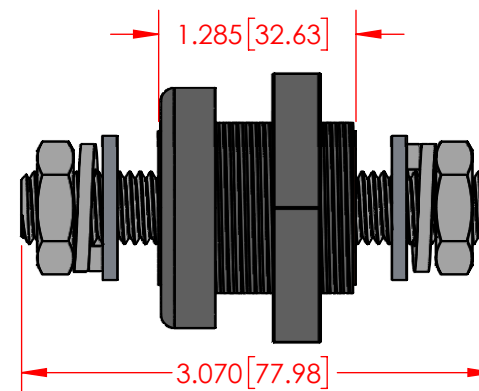
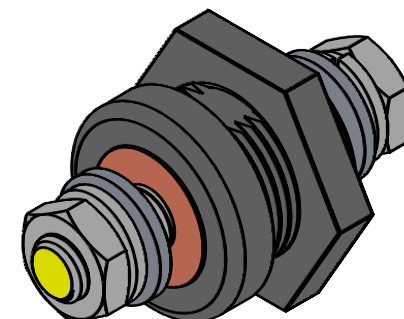


REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED

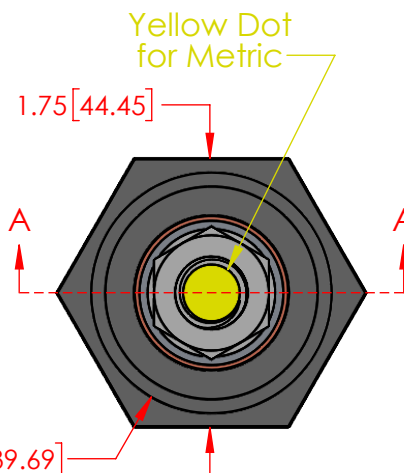

Use Greenlee Punch
Assembly #60098
for Panel Cutout

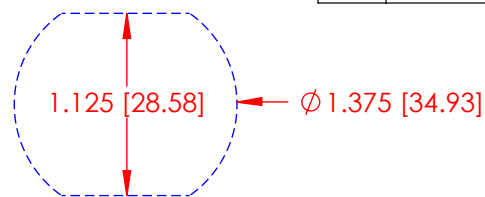

SECTION A-A

Cable Temp Rating : 60c 75c 90c 105c
Current Amperage : 300 400 450 515

Maximum Voltage : 48

MATERIAL PART NO: 1111210514UL
MATERIAL: GLASS FILLED NYLON
VENDOR PART NO: HYLON N2015 HL BK

MAX M12 FASTENER TORQUE: 198 IN./LBS. [22.30 Nm]
MAX NYLON NUT TORQUE: 120 IN./LBS. [13.56 Nm]

Assembly Weight :
0.34 Lbs. [153.2 g]

ALL DIMENSIONS GIVEN AS : INCH [METRIC]
TOLERANCES UNLESS OTHERWISE SPECIFIED :
MOLDED PRODUCTS : ± 0.030 " / ± 0.8 mm
HARDWARE PRODUCTS : ± 0.010 " / ± 0.25 mm

PRINTED COPIES ARE NOT CONTROLLED

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
VTE INCORPORATED. ANY REPRODUCTION
IN PART OR AS A WHOLE WITHOUT THE WRITTEN
PERMISSION OF VTE INCORPORATED PROHIBITED.

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	3864-003	Formed Copper Core Bushing	1
2	3648-011	M12 Copper Contact Washer	2
3	3655-000	M12 18-8 Stainless Steel Lock Washer	2
4	3742-016	12mm x 1.75 Nickel Plated Steel Double Ended Stud	1
5	3847-000	12mm x 1.75 18-8 Stainless Steel Nut	2
6	3649-000	1/2" 18-8 Stainless Steel Flat Washer	2
7	360N9N14	Nylon Power Bushing Housing (Black)	1
8	359N0N02	Glass Filled Nylon Locking Nut (Black)	1



VTE INCORPORATED

5437 Robinson Road, P.O. Box 790
Pellston, Michigan 49769 USA
Telephone : 1-800-527-9256, 231-539-8000
Fax : 231-539-0914, Efax : 231-344-5914

REV	NAME	DATE	TITLE:
SIZE	DRAWN BY:	RAS	5-13-26
A	CHECKED BY:		
DO NOT SCALE DRAWING			DWG. NO. CCB126N14