



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED. VTE MAKES NO WARRANTY, EXPRESSED OR IMPLIED, AS TO THE SUITABILITY OF A PRODUCT FOR ANY INTENDED USE. THE CUSTOMER SHALL BEAR THE SOLE RESPONSIBILITY OF DETERMINING THE SUITABILITY OF ANY VTE PRODUCT FOR ITS END USE.

USE GREENLEE PUNCH
ASSEMBLY #60098
FOR PANEL CUTOUT

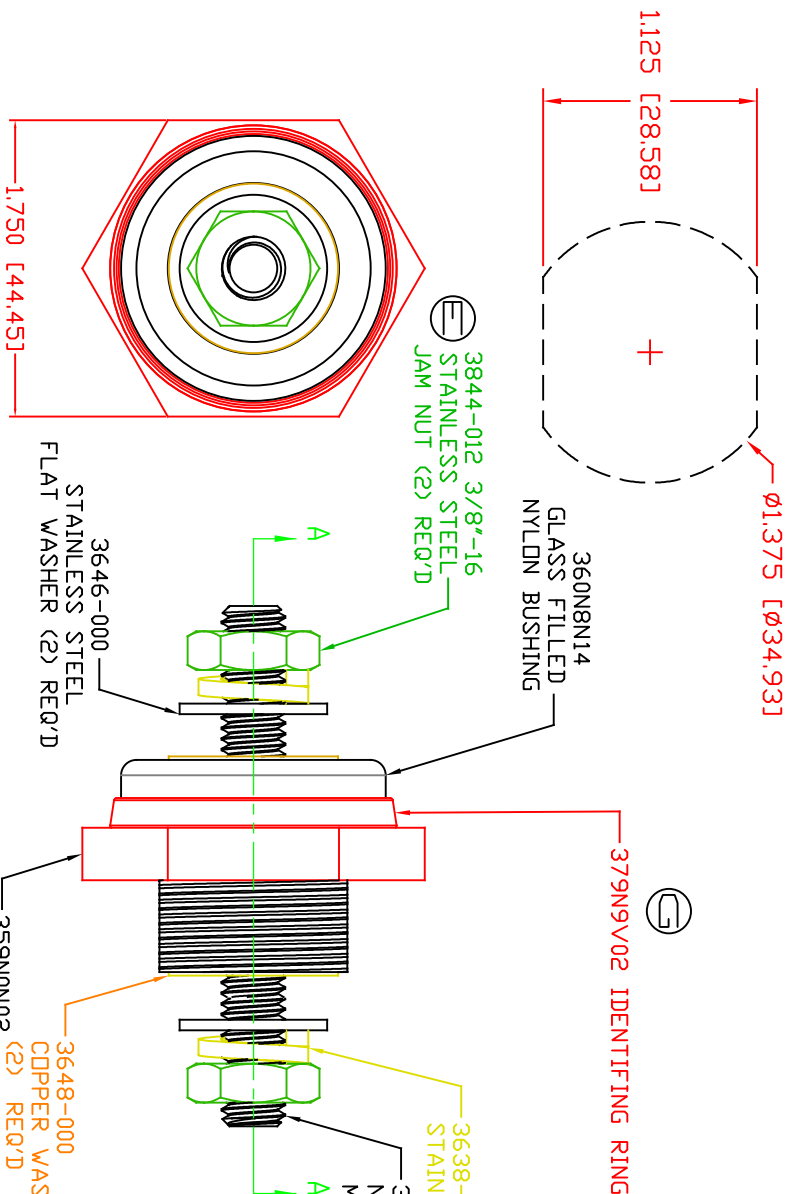

LTR	REVISIONS	DATE	INT.
A	3.07" WAS 3.25"	5-11-10	BRH
B	REDUCED FROM 550 AMP	12-17-15	RAS
C	ADDED TORQUE TAG	12-29-15	RAS
D	MOVED TORQUE TAG TO OPPOSITE POST	1-27-16	RAS
E	3844-012 WAS 3844-003	11-04-16	JMM
F	REMOVED FT/LBS, ADDED Nm	5-4-17	JMM
G	379N9V02 WAS 379N9N02, 3.09 WAS 3.072	6-13-17	JMM
H	REDRAWN (ORIGINAL DRAWING 5-28-09)	11-10-17	RAS
I	UPDATED TORQUE VALUES FROM 100 IN-LBS (23.24 Nm)	2-03-18	RAS
J	REMOVED TORQUE TAG	03-06-26	RAS

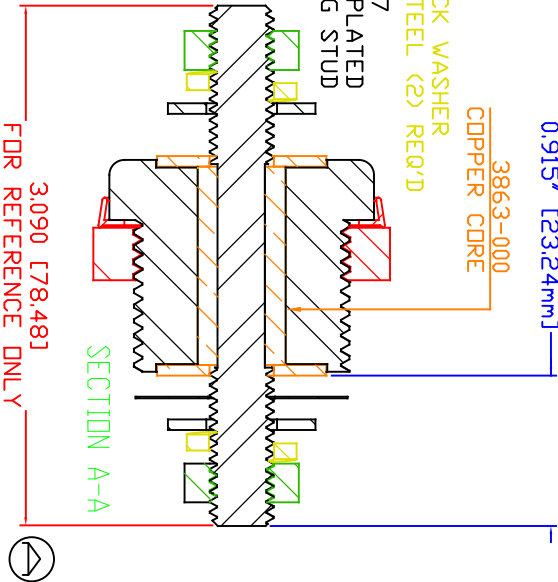

SCALE FACTOR: 1 NONE
ALL DIMENSIONS GIVEN AS: In [mm]
TOLERANCES UNLESS OTHERWISE SPECIFIED:
MOLDED PARTS: $\pm 0.30"$ [$\pm 0.8mm$]
HARDWARE ITEMS: $\pm 0.10"$ [$\pm 0.25mm$]

MAXIMUM FASTENER TORQUES:
JAM NUTS: 212 IN-LBS [24.0 Nm]
SEALING NUT: 120 IN-LBS [13.56 Nm]

CURRENT CARRYING CAPACITY:
DUTY CYCLE:
CURRENT CAPACITY:
TEMPORARY MAX (12 MINUTES)
MATERIAL PART NO:
VENDOR PART NO:
SPECIFIC GRAVITY:
MELTING TEMP:
U.L. RATING:

80%,
5.2 kw (440 AMP @ 12VDC)
6.6 kw (550 AMP @ 12VDC)
111210514UL
GLASS FILLED NYLON
HYLON N2015 HL BK
1.123
515 F [268 C]
UL 94 HB



VTE Incorporated
5437 Robinson Road, P.O. Box 790
Pellston, Michigan 49769
Telephone: 1-800-527-9256, 231-539-8000
FAX: 231-539-0914

REF.	DATE:	DRN BY:	RAS	WEIGHT:
CUSTOMER DIMS	11-10-17	CHK'D BY:	PAK	
TITLE:	3/8" POWER BUSHING, COPPER CORE			
MATERIAL:	GLASS FILLED NYLON			
COLOR:	RED	DRG	CLASS	REV J
CCB376N0N02				