


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED. VTE MAKES NO WARRANTY, EXPRESSED OR IMPLIED, AS TO THE SUITABILITY OF A PRODUCT FOR ANY INTENDED USE. THE CUSTOMER SHALL BEAR THE SOLE RESPONSIBILITY OF DETERMINING THE SUITABILITY OF ANY VTE PRODUCT FOR ITS END USE.

1.125 [28.581]
USE GREENLEE PUNCH
ASSEMBLY #60098
FOR PANEL CUTOUT


Ø1.375 [34.931]

Ø2.532 [Ø64.311]

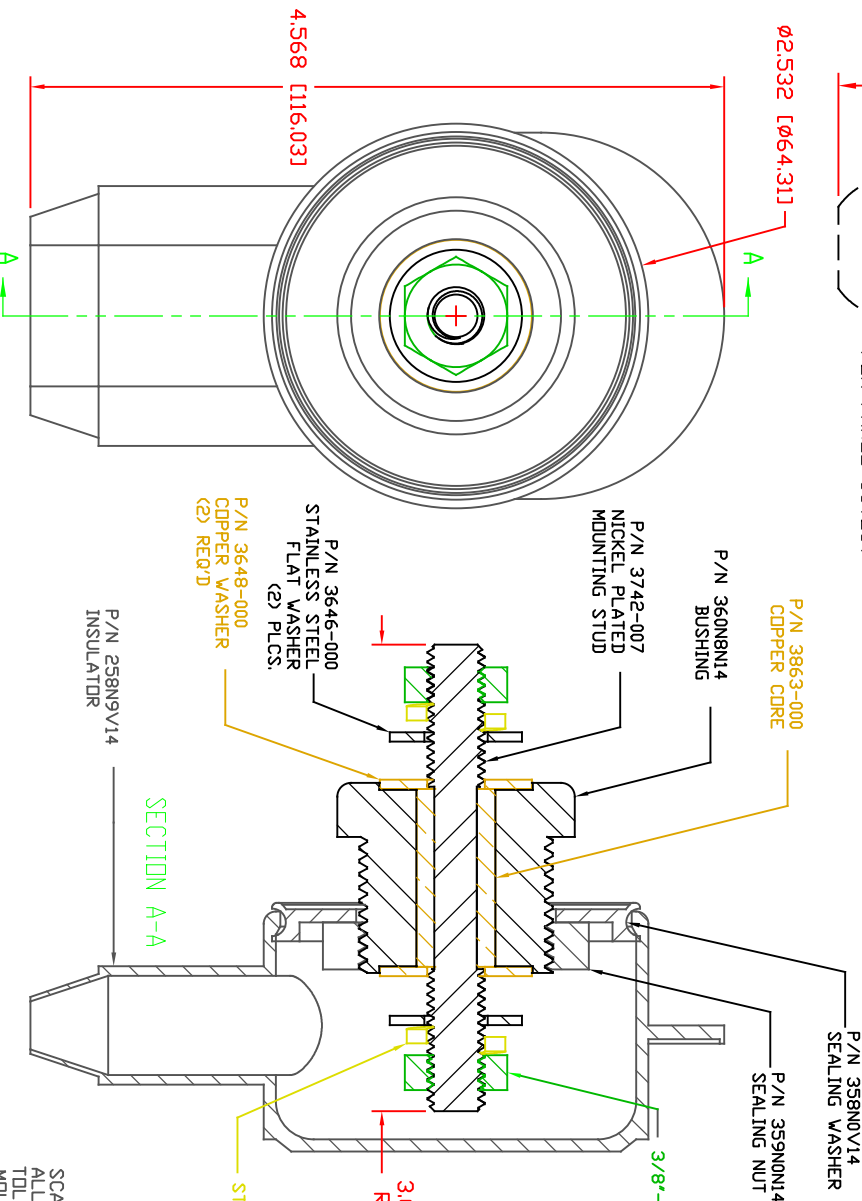

LTR	REVISIONS	DATE	INT.
A	307' WAS 325'	5-11-10	BRH
B	REDUCED FROM 550 AMP	11-17-15	RAS
C	ADDED TORQUE TAG	12-29-15	RAS
D	INCREASED FROM 350 AMP	1-01-16	RAS
E	MOVED TORQUE TAG TO OPPOSITE POST	1-27-16	RAS
F	3.09 WAS 3.07, UPDATED MATERIAL P/N	6-22-17	JMM
G	REDRAWN (ORIGINAL DRAWING 5-28-09)	11-17-17	RAS
H	UPDATED TORQUE VALUES FROM 180 IN-LBS [20.34 Nm]	2-03-18	RAS
I	ADDED IP65 STATEMENT	10-17-18	RAS
J	REMOVED TORQUE TAG	03-06-26	RAS

3.090 [78.481]
REFERENCE
ONLY

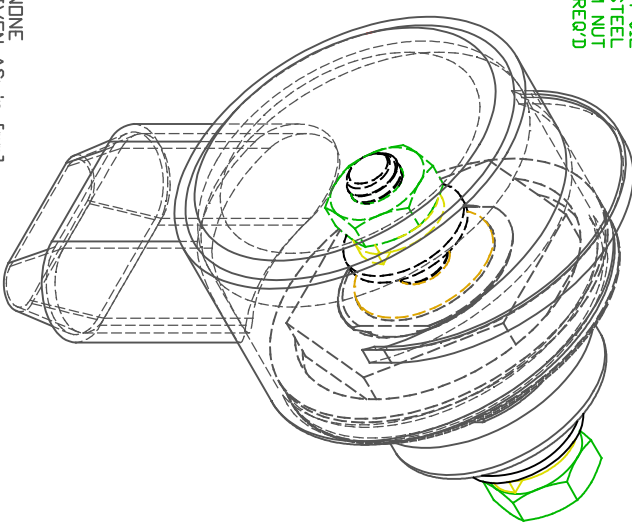

SCALE FACTOR : NONE
ALL DIMENSIONS GIVEN AS: in [mm]
TOLERANCES UNLESS OTHERWISE SPECIFIED :
MOLDED PARTS: ±.030" [±0.8mm]
HARDWARE ITEMS: ±.010" [±0.25mm]



MAXIMUM FASTENER TORQUES:

JAM NUTS: 212 IN-LBS [24.0 Nm]

SEALING NUT: 120 IN-LBS [13.5 Nm]

CURRENT CARRYING CAPACITY:

DUTY CYCLE:

CURRENT CAPACITY:

TEMPORARY MAX (12 MINUTES)

MATERIAL PART NO:

MATERIAL:

VENDOR PART NO:

SPECIFIC GRAVITY:

MELTING TEMP:

U.L. RATING:

< ASSEMBLY DESIGNED TO MEET
IP65 REQUIREMENTS >

80%

5/2 KW (440 AMP @ 12VDC)

6.6 KW (550 AMP @ 12VDC)

1111210514UL


GLASS FILLED NYLON

HYLON N2015 HL BK

1.23

515 F [268 C]

UL 94 HB



VTE Incorporated
5437 Robinson Road, P.O. Box 790
Pellston, Michigan 49769
Telephone: 1-800-527-9256, 231-539-8000
FAX: 231-539-0914

REF:	DATE:	DRN BY:	RAS	WEIGHT:
CUSTOMER DIMS	11-17-17	CHK'D BY:	PUK	
TITLE: WEATHER PROOF 3/8" POWER BUSHING, COPPER CORE				
MATERIAL: GLASS FILLED NYLON			PART NO:	
COLOR: BLACK	DRG	CLASS	REV J	CCB376N0N14W