


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED.VTE MAKES NO WARRANTY, EXPRESSED OR IMPLIED, AS TO THE SUITABILITY OF A PRODUCT FOR ANY INTENDED USE. THE CUSTOMER SHALL BEAR THE SOLE RESPONSIBILITY OF DETERMINING THE SUITABILITY OF ANY VTE PRODUCT FOR ITS END USE.

USE GREENLEE PUNCH
ASSEMBLY #60098
FOR PANEL CUTOUT

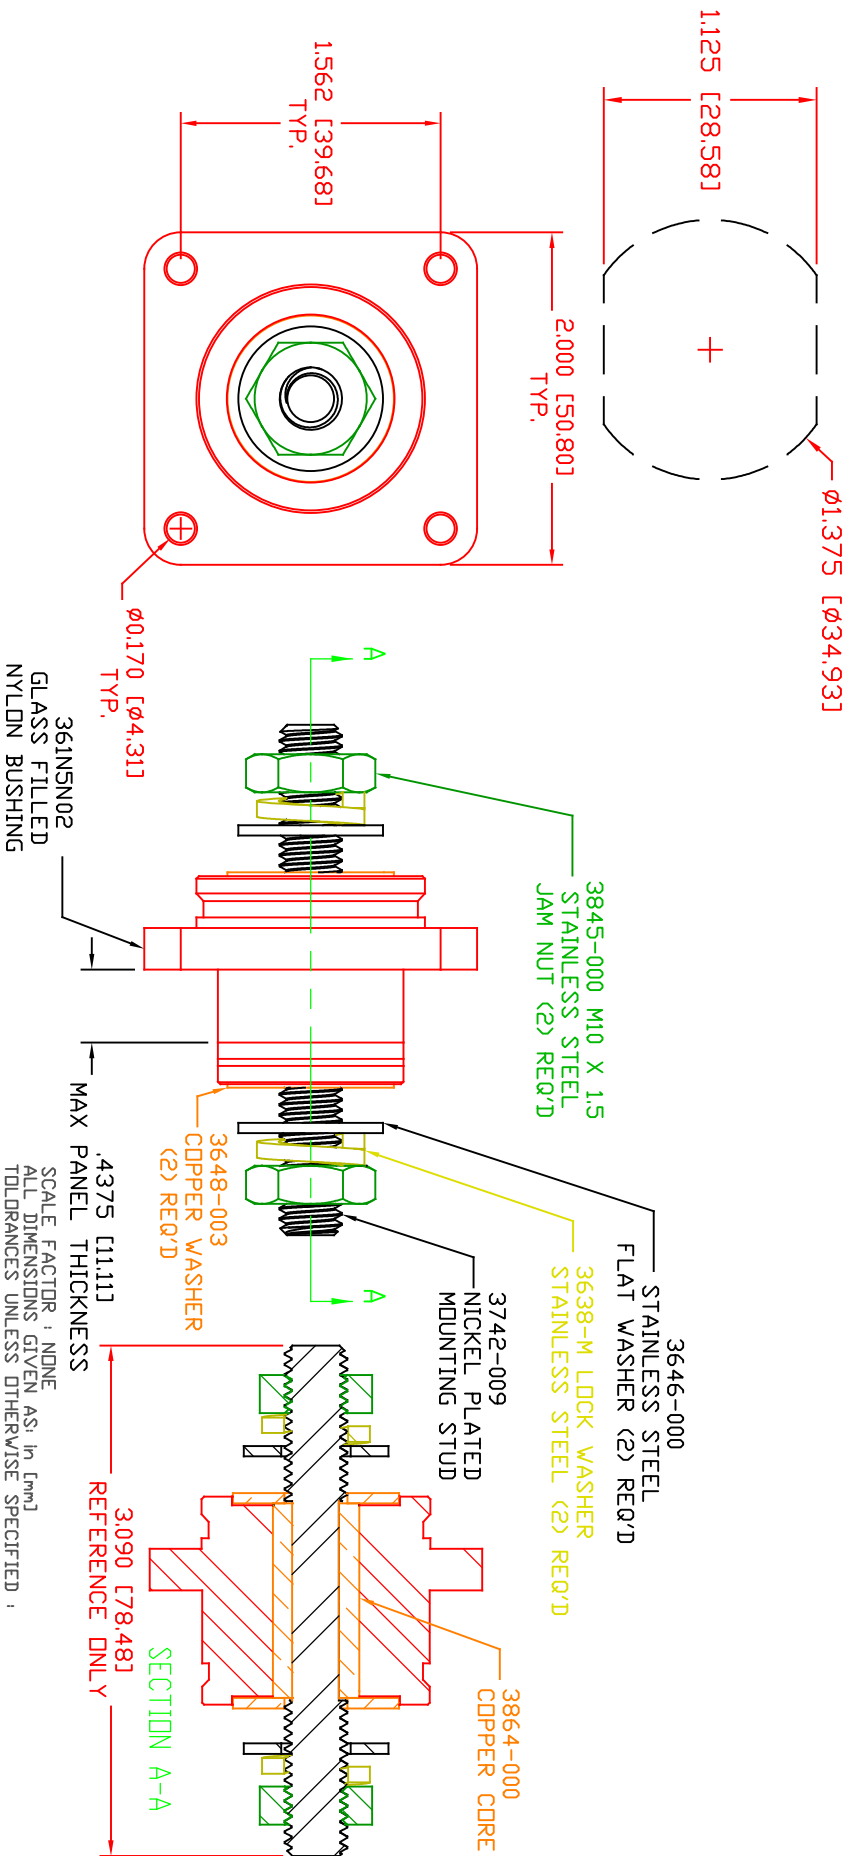

MAXIMUM FASTENER TORQUES:
JAM NUTS: 212 IN-LBS [24.0 Nm]

CURRENT CARRYING CAPACITY:

DUTY CYCLE:

CURRENT CAPACITY:

TEMPORARY MAX (12 MINUTES)

MATERIAL PART NO:

MATERIAL:

VENDOR PART NO:

SPECIFIC GRAVITY:

MELTING TEMP:

U.L. RATING:

80%

4.3 Kw (360 AMP @ 12VDC)

5.4 Kw (450 AMP @ 12VDC)

711210502

GLASS FILLED NYLON

NYLON N2015 HL NAT

1.23

515 F [268 C]

UL 94 HB



VTE Incorporated
5437 Robinson Road, P.O. Box 790
Pellston, Michigan 49769
Telephone: 1-800-527-9256, 231-539-8000
FAX: 231-539-0914

REF.	DATE:	DRN BY:	RAS	WEIGHT:
CUSTOMER DIMS	11-13-17	CHK'D BY:	PJK	
TITLE:	10MM PANEL MOUNT POWER BUSHING, COPPER CORE			
MATERIAL:	GLASS FILLED NYLON		PART NO.	
COLOR:	RED	DRG	CLASS	REV B
CCFB106N02				

LTR.	REVISIONS	DATE	INT.
Ⓐ	UPDATED TORQUE VALUES FROM 180 IN-LBS [20.34 Nm]	2-03-18	RAS
Ⓑ	REMOVED TORQUE TAG	3-24-26	RAS