



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED. VTE MAKES NO WARRANTY, EXPRESSED OR IMPLIED, AS TO THE SUITABILITY OF A PRODUCT FOR ANY INTENDED USE. THE CUSTOMER SHALL BEAR THE SOLE RESPONSIBILITY OF DETERMINING THE SUITABILITY OF ANY VTE PRODUCT FOR ITS END USE.

LTR.	REVISIONS	DATE	INT.
Ⓐ	UPDATED TORQUE VALUES FROM 180 IN-LBS (20.34 Nm)	2-03-18	RAS
B	REMOVED TORQUE TAG	3-24-26	RAS




USE GREENLEE PUNCH
ASSEMBLY #60098
FOR PANEL CUTOUT

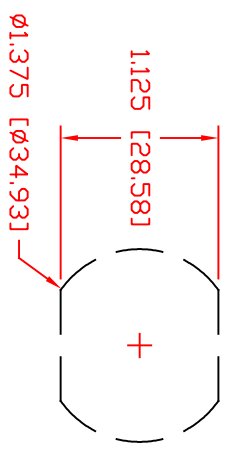

- ASSEMBLY CCFB376N05W CONSIST OF:
- 1-CCFB376N05 POWER BUSHING
- 1-3960-002 SEALING GASKET
- 1-232N3V05 INSULATOR BOOT

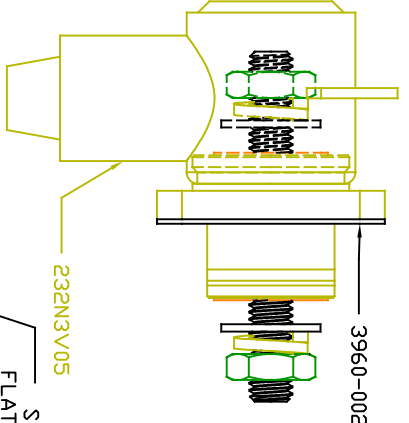

P/N 3960-002
.062 THICK CF 4480 81 DUREMETER
FIBERGLASS REINFORCED SILICONE
PRESS PAD SEALING GASKET

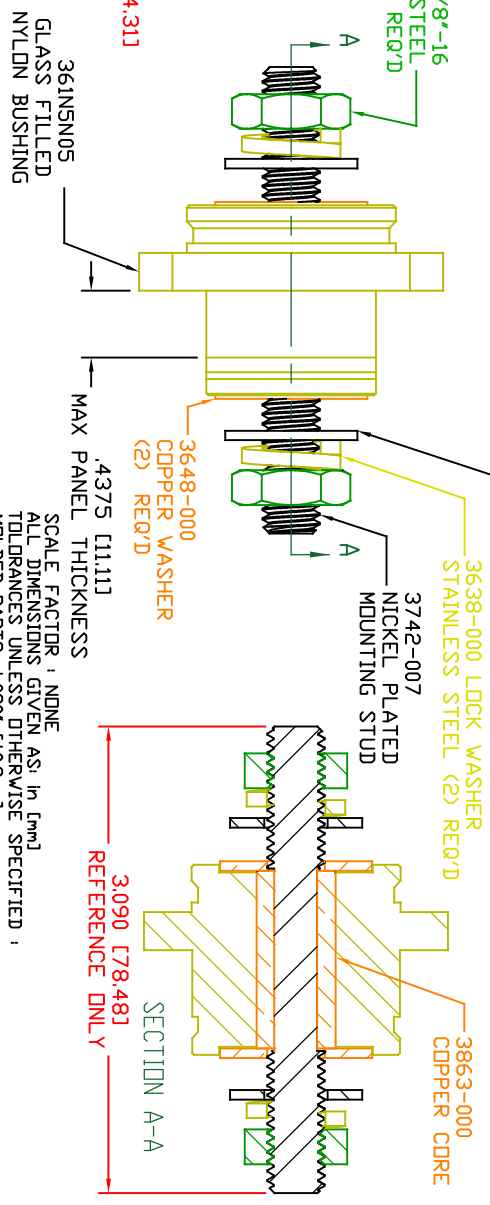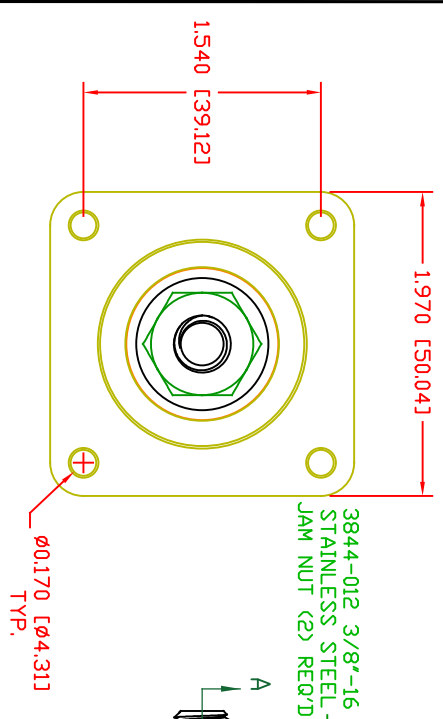

SCALE FACTOR: NONE
ALL DIMENSIONS GIVEN AS: IN [mm]
TOLERANCES UNLESS OTHERWISE SPECIFIED:
MOLDED PARTS: ±.030" [±0.8mm]
HARDWARE ITEMS: ±.010" [±0.25mm]

Ⓐ MAXIMUM FASTENER TORQUES:
JAM NUTS: 212 IN-LBS [24.0 Nm]

CURRENT CARRYING CAPACITY:
DUTY CYCLE: 80%
CURRENT CAPACITY: 5.2 Kw (440 AMP @ 12VDC)
TEMPORARY MAX (12 MINUTES): 6.6 Kw (550 AMP @ 12VDC)
MATERIAL: 7111210505
VENDOR PART NO: GLASS FILLED NYLON
SPECIFIC GRAVITY: NYLON N2015 HL NAT
MELTING TEMP: 123
UL RATING: 515 F [268 C]
UL 94 HB

VTE Incorporated
5437 Robinson Road, P.O. Box 790
Pellston, Michigan 49769
Telephone: 1-800-527-9256, 231-539-8000
FAX: 231-539-0914

REF:	DATE:	DRN BY:	RAS	WEIGHT:
	11-16-17	CHK'D BY:	PUK	
TITLE:		PART NO.		
3/8" PANEL MOUNT POWER BUSHING, COPPER CORE		CCFB376N05W		
MATERIAL: GLASS FILLED NYLON		DRG CLASS		
COLOR: YELLOW		REV B		