



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED. VTE MAKES NO WARRANTY, EXPRESSED OR IMPLIED, AS TO THE SUITABILITY OF A PRODUCT FOR ANY INTENDED USE. THE CUSTOMER SHALL BEAR THE SOLE RESPONSIBILITY OF DETERMINING THE SUITABILITY OF ANY VTE PRODUCT FOR ITS END USE.


USE GREENLEE PUNCH
ASSEMBLY #60098
FOR PANEL CUTOUT

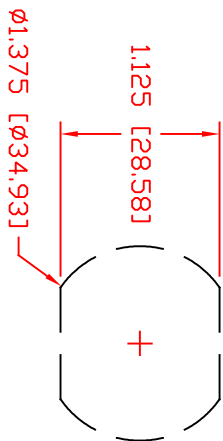




- ASSEMBLY
CCF B376N14W
CONSIST OF:
- 1-CCFB376N14
POWER BUSHING
 - 1-3960-002
SEALING GASKET
 - 1-232N3V14
INSULATOR BOOT

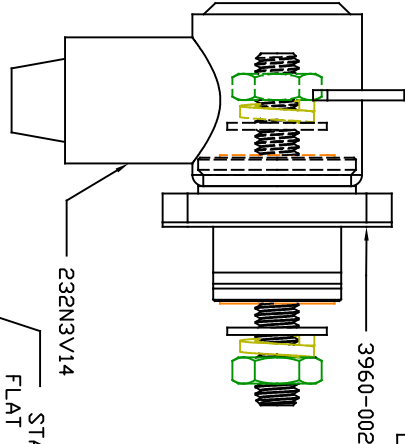

- 3646-000
STAINLESS STEEL
FLAT WASHER (2) REQ'D



P/N 3960-002
.062 THICK CF 4480 81 DURDMETER
FIBERGLASS REINFORCED SILICONE
PRESS PAD SEALING GASKET

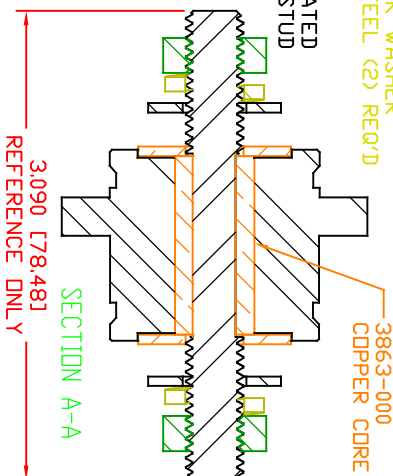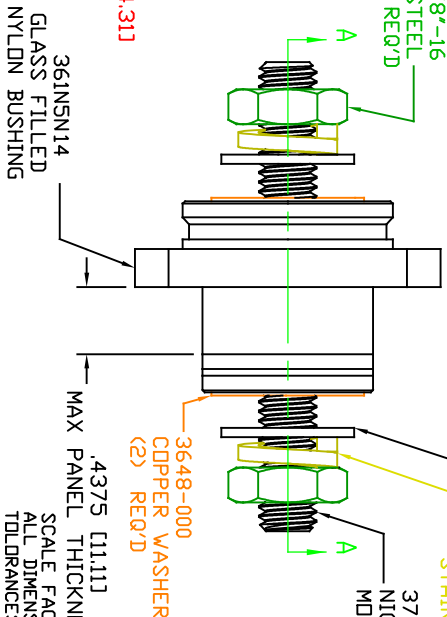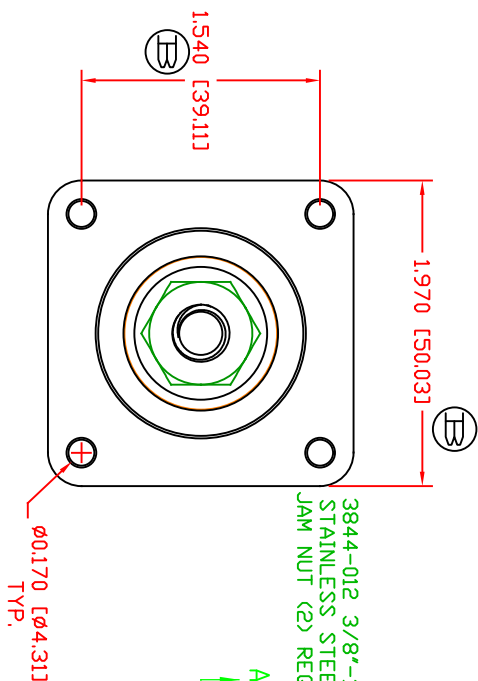

MAXIMUM FASTENER TORQUES:
JAM NUTS: 212 IN-LBS [24.0 Nm]

CURRENT CARRYING CAPACITY:
DUTY CYCLE:
CURRENT CAPACITY:
TEMPORARY MAX (12 MINUTES)
MATERIAL PART NO:
MATERIAL:
VENDOR PART NO:
SPECIFIC GRAVITY:
MELTING TEMP:
U.L. RATING:

80%
5.2 Kw (440 AMP @ 12VDC)
6.6 Kw (550 AMP @ 12VDC)
111210514UL
GLASS FILLED NYLON
HYLON N2015 HL BK
1.23
515 F [268 C]
UL 94 HB

LTR	REVISIONS	DATE	INT.
A	UPDIED TORQUE VALUES FROM 180 IN-LBS (20.3 Nm)	2-03-18	RAS
B	UPDATED DIMENSION OF 36INS BASE	10-28-20	EJE
C	REMOVED TORQUE TAG	3-24-26	RAS



VTE Incorporated
5437 Robinson Road, P.O. Box 790
Pellston, Michigan 49769
Telephone: 1-800-527-9256, 231-539-8000
FAX: 231-539-0914

REF.	DATE	DRN BY:	RAS	WEIGHT:
CUSTOMER DIMS	11-16-17	CHK'D BY:	PJK	
TITLE:	3/8" PANEL MOUNT POWER BUSHING, COPPER CORE			
MATERIAL: GLASS FILLED NYLON				
COLOR: BLACK	DRG CLASS	REV C		
				CCFB376N14W