



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED.

LTR.	REVISIONS	DATE	INT.
Δ	ADDED TORQUE TAG	12-29-15	RAS
⊞	UPDATED TORQUE VALUES FROM 100 IN-LBS (20.34 Nm)	2-03-18	RAS
⊖	REMOVED TORQUE TAG	03-24-26	RAS

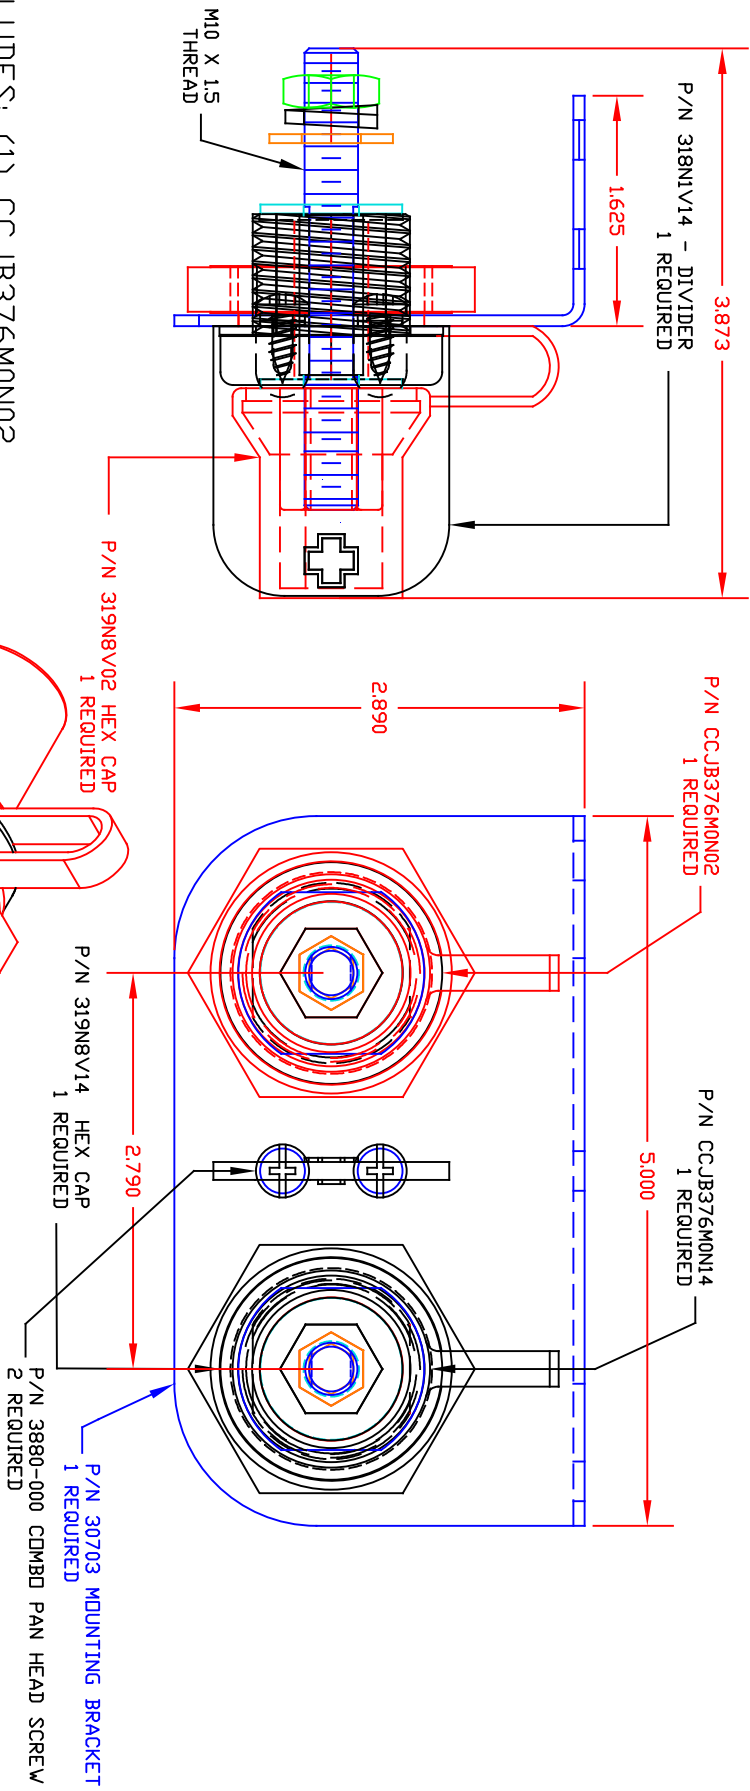

INCLUDES: (1) CCJB376M0N02
(1) CCJB376M0N14

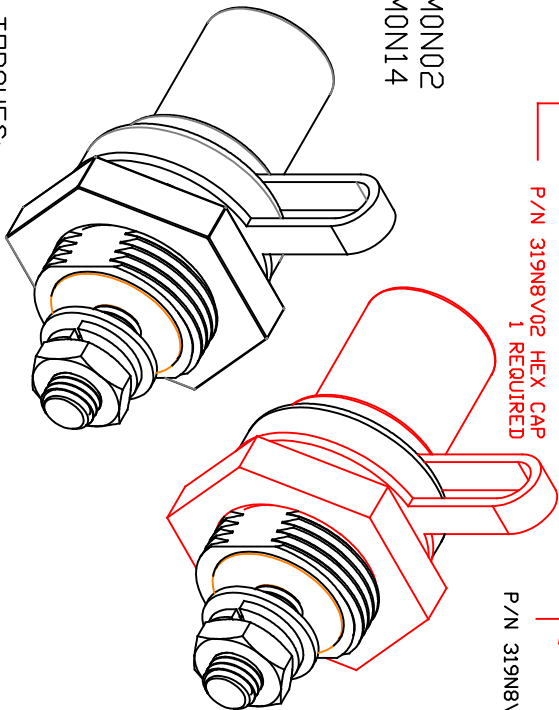

MAXIMUM FASTENER TORQUES:

⊞ JAM NUTS: 212 IN-LBS [24.0 Nm]
SEALING NUT: 120 IN-LBS [13.5 Nm]
CURRENT CARRYING CAPACITY: 350 AMPS @ 12VDC

TOLERANCE UNLESS OTHERWISE SPECIFIED:
MOLDED PRODUCTS ONLY: ±.030/±.08mm
HARDWARE ITEMS: ±.010/±.025mm
RADIAL DIAMETERS TO BE MEASURED OVER MANDRELS,
RING GAGES OR PIN GAGES OF SUITABLE SIZE



VTE Incorporated
5437 Robinson Road, P.O. Box 790
Pellston, Michigan 49769
Telephone: 1-800-527-9256, 231-539-8000
FAX: 231-539-0914

REF:	DATE:	15DEC15	DRN BY:	RAS	WEIGHT:
TITLE:	COPPER CORE JUMPER BUSHING BRACKET MOUNT KIT METRIC			CHK'D BY:	RAS
MATERIAL:	PART NO.			SCALE:	
COLOR:	DRG	CLASS	REV	C	CCJB376BMKM