


REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
G	Redrawn in Solidworks	7/13/2026	RAS

Use Greenlee Punch
Assembly #60098
for Panel Cutout

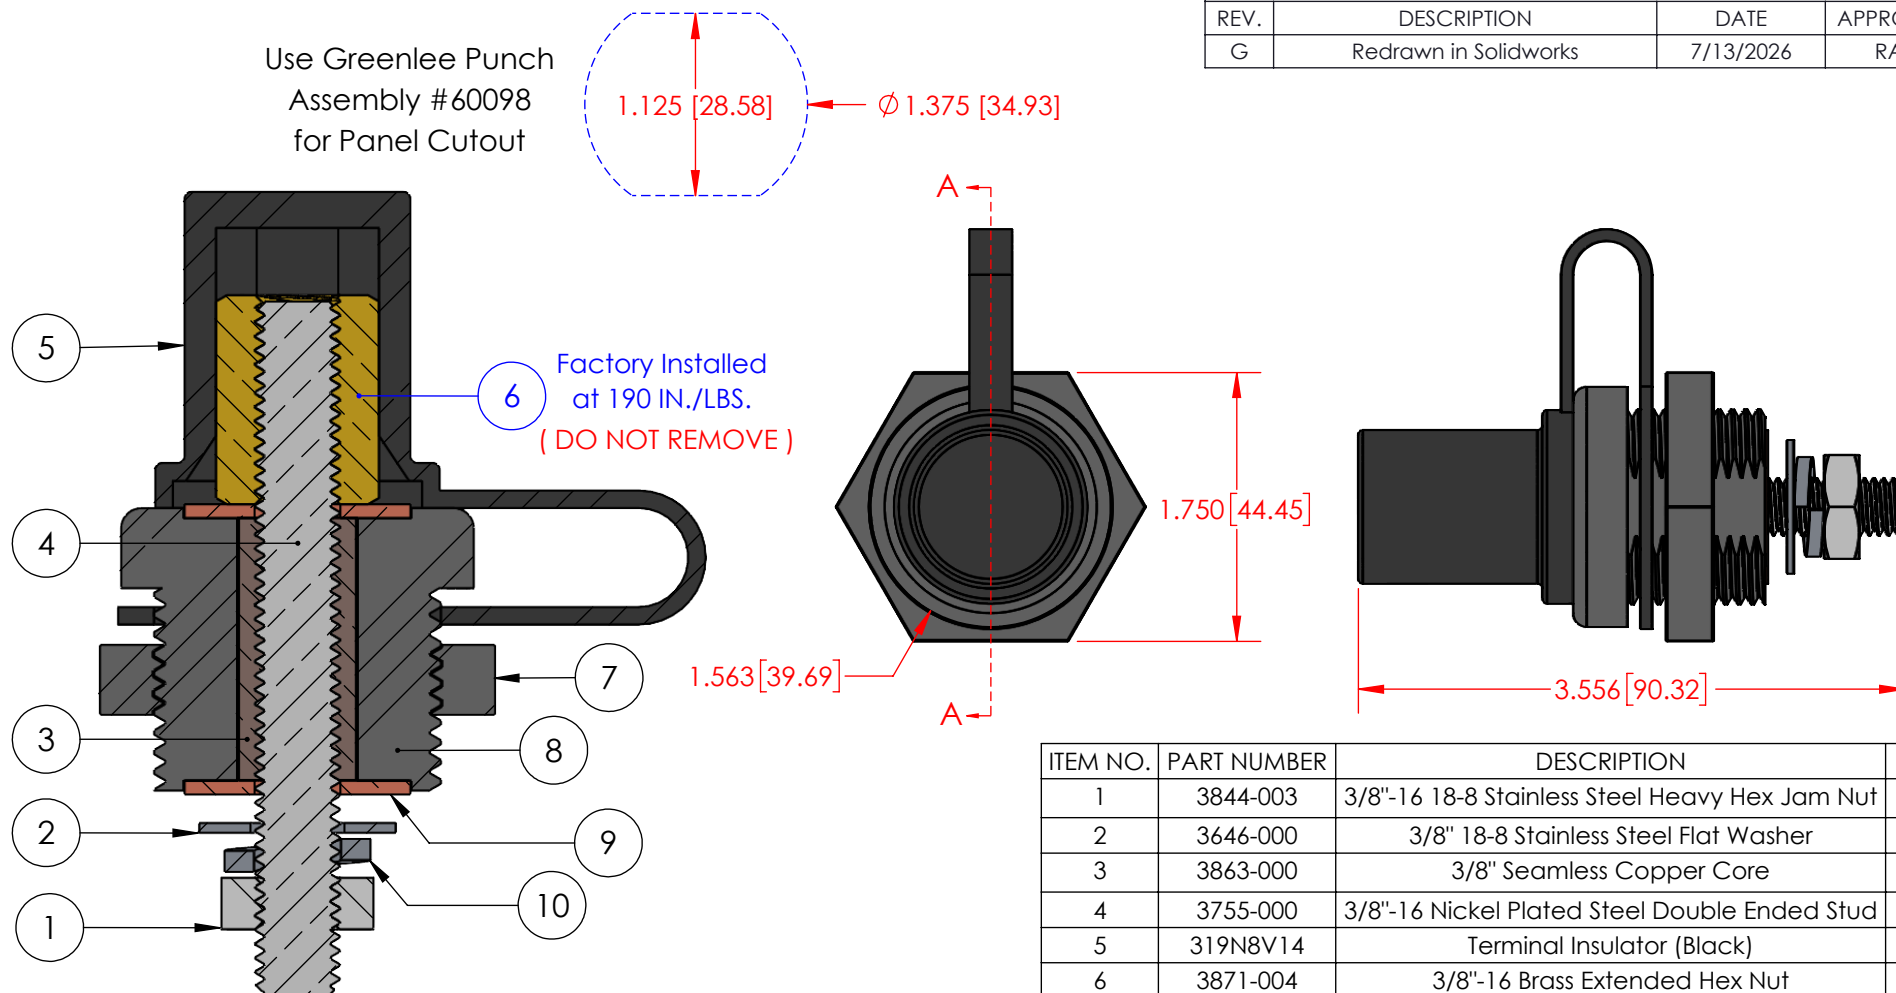

SECTION A-A

Max Amperage: 350 amps @ 12 vdc
Max Voltage: 48 vdc

MATERIAL PART NO: 1111210514UL
MATERIAL: GLASS FILLED NYLON
VENDOR PART NO: HYLON N2015 HL BK

MAX 3/8 FASTENER TORQUE: 212 IN./LBS. [24.0 Nm]
MAX NYLON NUT TORQUE: 120 IN./LBS. [13.56 Nm]

Assembly Weight :
0.34 Lbs. [154.0 g]

ALL DIMENSIONS GIVEN AS : INCH [METRIC]
TOLERANCES UNLESS OTHERWISE SPECIFIED :
MOLDED PRODUCTS : $\pm .030$ " / ± 0.8 mm
HARDWARE PRODUCTS : $\pm .010$ " / ± 0.25 mm

PRINTED COPIES ARE NOT CONTROLLED

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
VTE INCORPORATED. ANY REPRODUCTION
IN PART OR AS A WHOLE WITHOUT THE WRITTEN
PERMISSION OF VTE INCORPORATED PROHIBITED.

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	3844-003	3/8"-16 18-8 Stainless Steel Heavy Hex Jam Nut	1
2	3646-000	3/8" 18-8 Stainless Steel Flat Washer	1
3	3863-000	3/8" Seamless Copper Core	1
4	3755-000	3/8"-16 Nickel Plated Steel Double Ended Stud	1
5	319N8V14	Terminal Insulator (Black)	1
6	3871-004	3/8"-16 Brass Extended Hex Nut	1
7	359N0N14	Glass Filled Nylon Locking Nut (Black)	1
8	360N8N14	Glass Filled Nylon Housing (Black)	1
9	3648-000	3/8" Copper Flat Washer	2
10	3638-000	3/8" 18-8 Stainless Steel Lock Washer	1



VTE INCORPORATED

5437 Robinson Road, P.O. Box 790
Pellston, Michigan 49769 USA
Telephone : 1-800-527-9256, 231-539-8000
Fax : 231-539-0914, Efax : 231-344-5914

REV	G	NAME	DATE
SIZE	A	DRAWN BY:	RAS 7-13-26
		CHECKED BY:	
		DO NOT SCALE DRAWING	

TITLE:	3/8" Jumper Bushing Assembly
DWG. NO.	CCJB376N0N14