
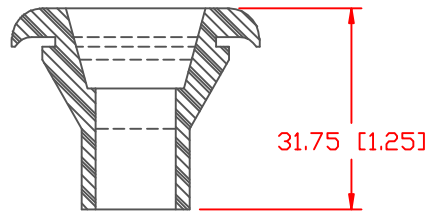



LTR.	REVISIONS	DATE
✂	*****	00-00-98


PROPRIETARY RIGHTS ARE CLAIMED FOR THE MATERIAL DISCLOSED IN THIS DRAWING.

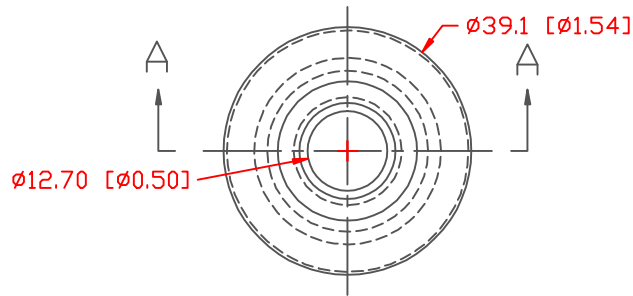


SECTION A-A

MADE TO FIT 1.0 IN (25.4 mm) DIAMETER HOLE
SHEET METAL THICKNESS TO 0.06 IN. [1.5 mm]

VTE Material Part No:	1101650102
Material:	RED PVC
Material Part No:	9812-65-RED683
Max. Operating Temp:	105 C
Shore Durometer:	"A" 10 SEC. 67/62
Specific Gravity:	1.34
Ult. Elongation %:	475
Brittle Temp:	-44 C
Tensile Strength PSI:	1547 PSI
Dielectric Strength, v./ml:	540
U.L. Rating:	94 V2
MEETS:	FMVSS.302



TOLERANCE UNLESS OTHERWISE SPECIFIED: ±.030"/±0.8mm
RADIAL DIAMETERS TO BE MEASURED OVER MANDRELS,
RING GAGES OR PIN GAGES OF SUITABLE SIZE

		VTE Incorporated 5437 Robinson Road, P.O. Box 790 Pellston, Michigan 49769 Telephone: 1-800-527-9256, 231-539-8000 FAX: 231-539-0914		
		REF:	DATE:	DRN BY: JC
		3-25-98	CHK'D BY:	12.6 grams
TITLE: GROMMET, WIRING 1" DIA. HOLE				
MATERIAL:		PART NO.		
		310N9V02		
COLOR:	DRG CLASS			