
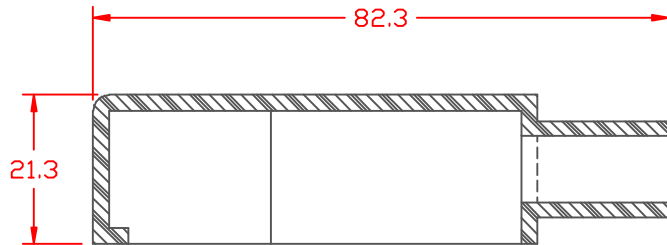
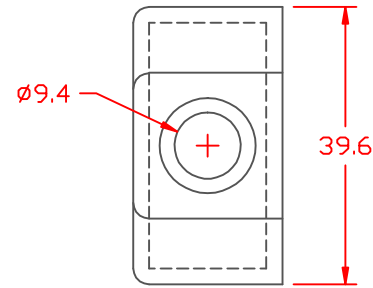


PROPRIETARY RIGHTS ARE CLAIMED FOR THE MATERIAL DISCLOSED IN THIS DRAWING.

TYP. WALL THICKNESS = 2.3  
TYP. RADIUS = 2.3

LTR.	REVISIONS	DATE
✧	*****	00-00-98

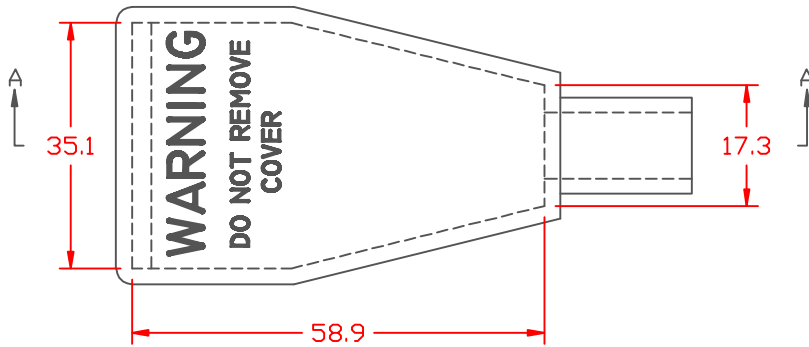


SECTION A-A

TOLERANCE UNLESS OTHERWISE SPECIFIED:  $\pm 0.030"/\pm 0.8\text{mm}$   
RADIAL DIAMETERS TO BE MEASURED OVER MANDRELS,  
RING GAGES OR PIN GAGES OF SUITABLE SIZE

VTE Material Part No: 1101650102  
Material: RED PVC  
Material Part No: 9812-65-RED683  
Max. Operating Temp: 105 C  
Shore Durometer: \*A\* 10 SEC. 67/62  
Specific Gravity: 1.34  
Ult. Elongation %: 475  
Brittle Temp: -44 C  
Tensile Strength PSI: 1547 PSI  
Dielectric Strength, v./ml: 540  
U.L. Rating: 94 V2  
MEETS: FMVSS.302



		<b>VTE Incorporated</b> 5437 Robinson Road, P.O. Box 790 Pellston, Michigan 49769 Telephone: 1-800-527-9256, 231-539-8000 FAX: 231-539-0914	
REF:	DATE: 3-27-98	DRN BY: JC CHK'D BY:	WEIGHT: .044 LBS. / 20 G.
TITLE: BATTERY CABLE BOOT			
MATERIAL:		PART NO. 415N6V02	
COLOR:	DRG CLASS		