


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED.

LTR.	REVISIONS	DATE
A	TABULATED DRAWING	25APR03
B	METRIC ITEM (3739-003) ADDED	04AUG03
C	ADDED 3739-004 FOR ASSY. # 77937	19MAR04
D	ADDED -000 SUFFIX	17MAR06

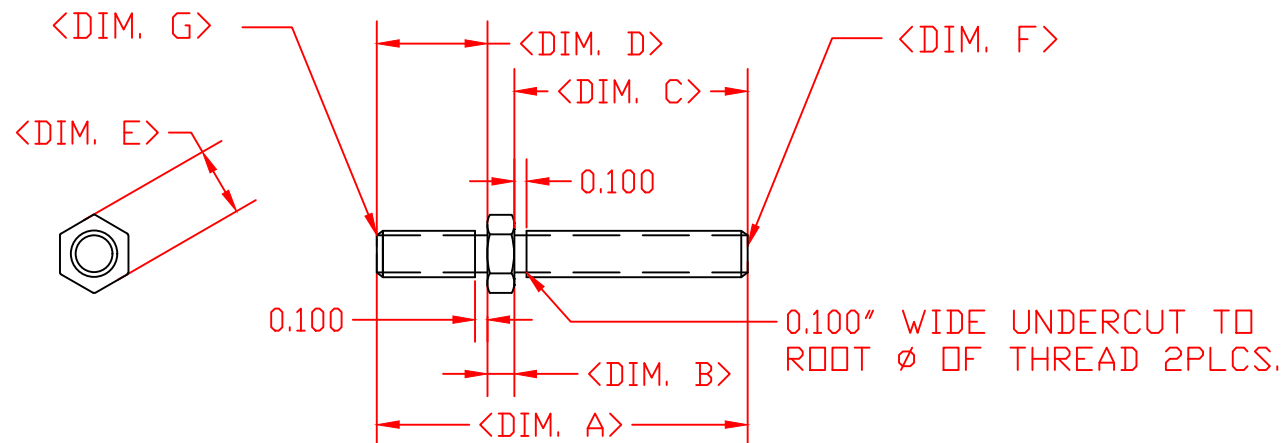

3739	ITEM #	DIM. A	DIM. B	DIM. C	DIM. D	DIM. E	DIM. F	DIM. G	CUSTOMER
	-000	3.000"	.218"	1.887"	.895"	.555"	3/8"-16	3/8"-16	VTE STANDARD PRODUCT
	-001	2.855"	.218"	1.887"	.750"	.555"	3/8"-16	3/8"-16	PANELTRONICS
	-002	2.106"	.218"	1.138"	.895"	.555"	3/8"-16	3/8"-16	REGAL MARINE
	-003	76.2MM	5.54MM	47.93MM	22.73MM	14.27MM	M10X1.5	M10X1.5	METRIC VERSION
	-004	4.000"	.218"	1.895"	1.887"	.555"	3/8"-16	3/8"-16	USED IN ASSY. # 77937

BRASS ALLOY 270/360
ROCKWELL HARDNESS B55 MINIMUM
TENSILE STRENGTH 55,000 PSI MINIMUM
PARTS MUST BE CLEAN AND OIL FREE
PARTS TO BE FULLY THREADED
TO WITHIN .100" (2.5MM) OF HEX
BOTH ENDS

DO NOT SCALE

TOLERANCE UNLESS OTHERWISE SPECIFIED:
HARDWARE ITEMS: $\pm 0.010"/\pm 0.25\text{mm}$
RADIAL DIAMETERS TO BE MEASURED OVER MANDRELS,
RING GAGES OR PIN GAGES OF SUITABLE SIZE

		VTE Incorporated 5437 Robinson Road, P.O. Box 790 Pellston, Michigan 49769 Telephone: 1-800-527-9256, 231-539-8000 FAX: 231-539-0914	
REF:	DATE: 29APR03	DRN BY: BRH CHK'D BY: BRH	WEIGHT:
TITLE: BRASS THREADED STUD			SCALE:
MATERIAL:		PART NO.	
COLOR:	DRG CLASS	3739-CHARTED	