
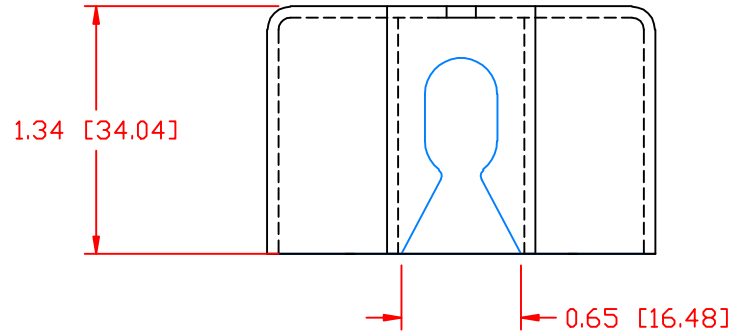
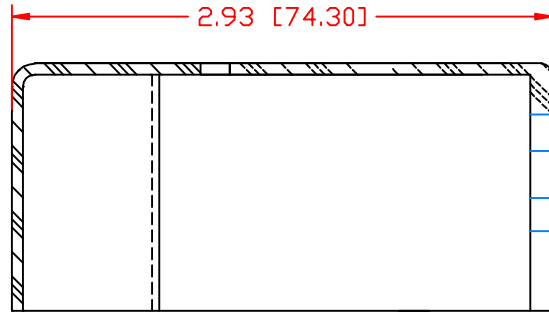
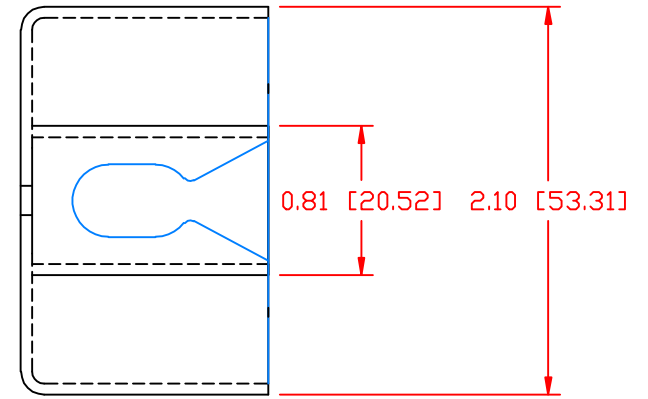


PROPRIETARY RIGHTS ARE CLAIMED FOR THE INFORMATION DISCLOSED IN THIS DRAWING. RELEASE OF THIS DESIGN CONCEPT TO ANY THIRD PARTY CONSTITUTES A VIOLATION OF OUR DEVELOPMENT AGREEMENT.

LTR.	REVISIONS	DATE
⏏	NEW GRIP DETAIL SIZE PER MARKED PRINT, (REMOVED SHROUD), ADDED DIMS 2.93", .120", AND .06" R. 2 PLCS.	14FE00


TYP. WALL THICKNESS = .06" (1.5mm)

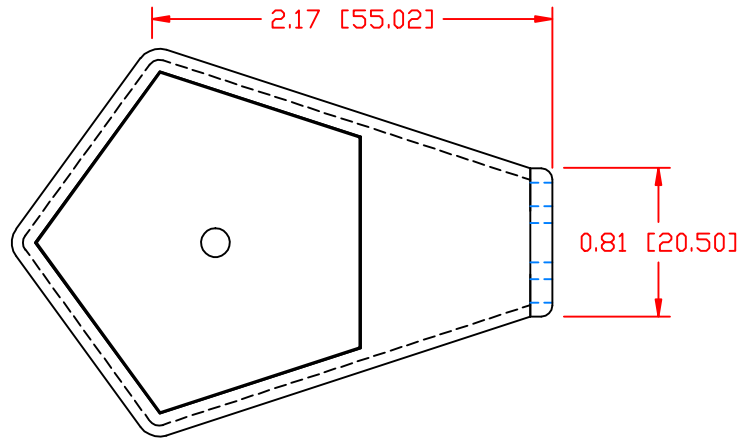


SECTION "A-A"

437S5

MATERIAL: HALOGEN FREE, FIRE RETARDANT THERMOPLASTIC OLEFIN
ELONGATION: 200%
MEETS: U.L. 94-V2
LIMITING OXYGEN INDEX: 37%
COLOR: BLACK
SPECIFIC GRAVITY: 1.05 - 1.10
MINIMUM TENSILE STRENGTH: 1500 PSI



TOLERANCE UNLESS OTHERWISE SPECIFIED: ±.030"/±0.8mm
 RADIAL DIAMETERS TO BE MEASURED OVER MANDRELS,
 RING GAGES OR PIN GAGES OF SUITABLE SIZE

		VTE Incorporated 5437 Robinson Road, P.O. Box 790 Pellston, Michigan 49769 Telephone: 1-800-527-9256, 231-539-8000 FAX: 231-539-0914	
		REF: ****	DATE: 06-15-99
TITLE: BATTERY TERMINAL INSULATOR			SCALE: NONE
MATERIAL: *****	PART NO. 437S5H14		
COLOR: ****	DRG CLASS: ****		