
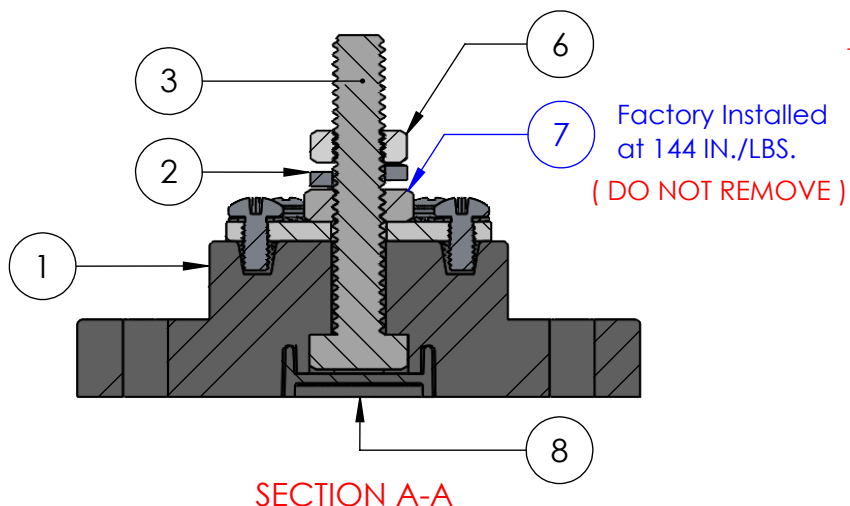
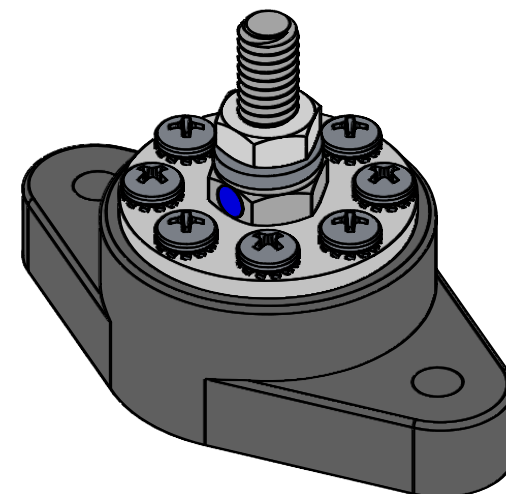
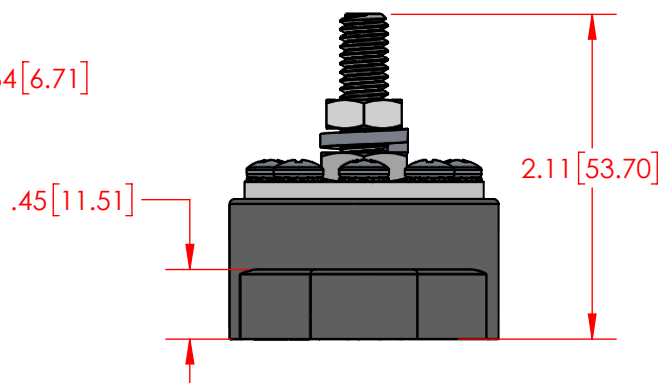


REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
H	Redrawn in Solidworks	6/4/2026	RAS

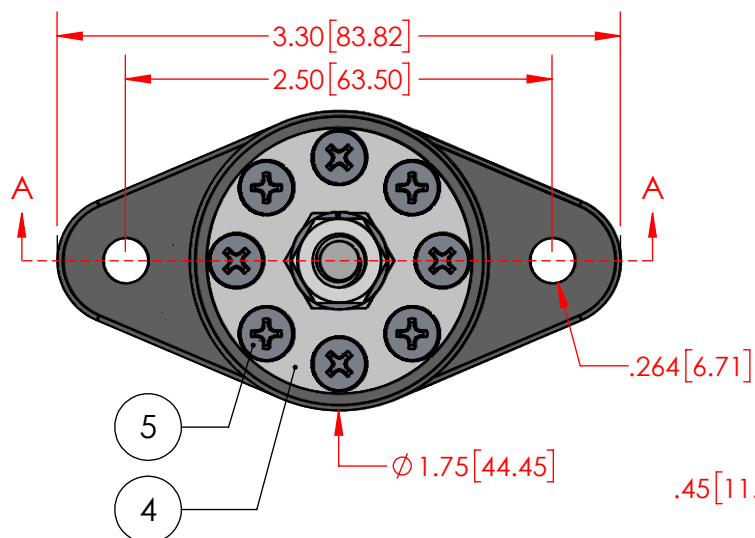

INCLUDES P-168081 10001 BLUE DOT MULTI LABEL, 1 PER CONTAINER

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	328N3N14	5/16" Large Power Post Base (Black)	1
2	3642-000	5/16" 18-8 Stainless Steel Lock Washer	1
3	3730-001	5/16-18 18-8 Stainless Steel Bolt 1.75"	1
4	3875-000	5/16" Nickel Plated Brass Distribution Disk	1
5	3870-000	8-32 304 Stainless Steel Sems Screw 5/16"	8
6	3843-010	5/16"-18 316 Stainless Steel Jam Nut	1
7	3843-B00	5/16"-18 Tin Plated Brass Heavy Hex Jam Nut	1
8	329N0N14	Glass Filled Nylon Base Plug (Black)	1

Max Amperage: 160 amps @ 12 vdc
20 amps per connection
Max Voltage: 48 vdc

MATERIAL PART NO: 1111210514UL
MATERIAL: GLASS FILLED NYLON
VENDOR PART NO: HYLON N2015 HL BK

MAX 5/16" FASTENER TORQUE: 120 IN./LBS. [13.5 Nm]
MAX #8 SEMS SCREW TORQUE: 15 IN./LBS. [1.70 Nm]

Assembly Weight :
0.25 Lbs. [114.5 g]

ALL DIMENSIONS GIVEN AS : INCH [METRIC]
TOLERANCES UNLESS OTHERWISE SPECIFIED :
MOLDED PRODUCTS : $\pm .030"$ / $\pm 0.8\text{mm}$
HARDWARE PRODUCTS : $\pm .010"$ / $\pm 0.25\text{mm}$

PRINTED COPIES ARE NOT CONTROLLED

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
VTE INCORPORATED. ANY REPRODUCTION
IN PART OR AS A WHOLE WITHOUT THE WRITTEN
PERMISSION OF VTE INCORPORATED PROHIBITED.



VTE INCORPORATED

5437 Robinson Road, P.O. Box 790
Pellston, Michigan 49769 USA
Telephone : 1-800-527-9256, 231-539-8000
Fax : 231-539-0914, Efax : 231-344-5914

REV	H	NAME	DATE
SIZE	A	DRAWN BY:	RAS
		CHECKED BY:	6-4-26
		DO NOT SCALE DRAWING	

TITLE: 8 - Point Power Post 5/16"

DWG. NO. **77831N14**